Features

1. Alimentation DC

- confirme haute précision et une grande stabilité.
- Les valeurs de tension et de courant sont réglables en continu de zéro à la valeur nominale.
- De tension et de courant constant sont en conversion automatique; point arbitraire dans le rage sera faite pour déterminer les limites et lieu de conservation.
- Tension et courant sont affichés sur LED numérique en même temps.

2. Alimentation DC fournit alimentation en courant ultra DC
3. DC Power Supply a circuit de protection parfaite;

Application: DC Power Supply est largement utilisé dans divers environnement, tels que les institutions laboratoires, équipement automatisé d'essai, équipement de test électronique, ligne de production de l'usine ect.

Specification

Conditions assignées de fonctionnement	
Entrée Tension d'alimentation:	110V / 220V ± 10% 50 / 60Hz
Tension de sortie:	0 ~ 60V
Courant nominal de sortie:	0 ~ 2A
Tension résolution d'affichage:	0.1V
Courant résolution d'affichage:	0.01A
Tension précision d'affichage:	± 1% ± 1 mot
Courant précision d'affichage:	± 1% ± 1 mot
Tension bruit d'ondulation:	≤1mVRMS (RMS)
Bruit ondulation de courant:	≤3mVRMS (RMS)
Exposition	Trois affichage de demi-LED
spécifications d'emballage	
Poids corporel:	4,185 kg (avec emballage)
La taille de la boîte:	35,5 * 16,3 * 19cm
Taille d'emballage:	51 * 47 * 41cm
Emballage:	6 ensembles
Un poids de carton:	26 kg
Montage:	Un manuel, alimentation 220v cordon

Features

BEST 倍思特

Product Name: DC Power Supply

Product Type:BST-A602D

Body weight：4.185kg

Dimensions：255*125*150mm

Features introduced

1.in the output full power of the state, work long hours;

2.Regulation, steady flow automatically switches;

3 Lower ripple voltage;

4 With freely selectable overcurrent protection mode, to adapt to a wider scope of use;

5 Has a continuously adjustable output overvoltage protection, the load has stronger protection；

Products

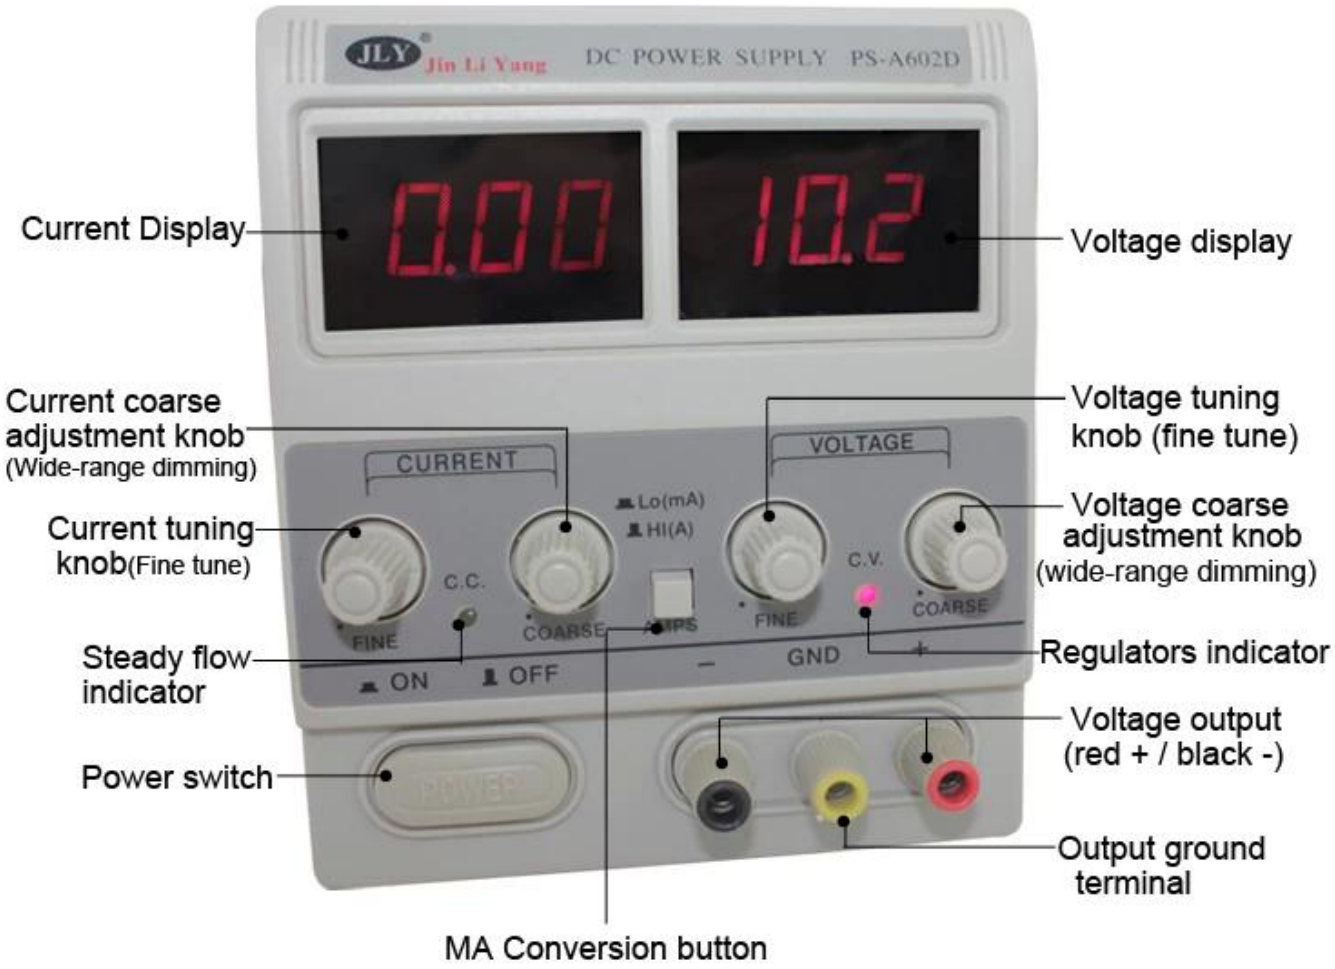
JLY
Jin Li Yang
DC POWER SUPPLY PS-A602D
0.00
10.2
Current Display
Voltage display
Current coarse adjustment knob
(Wide-range dimming)
Voltage tuning knob (fine tune)
CURRENT
VOLTAGE
Lo(mA)
HI(A)
Current tuning knob(Fine tune)
Voltage coarse adjustment knob
(wide-range dimming)
C.C.
C.V.
FINE
COARSE
FINE
COARSE
Steady flow indicator
Regulators indicator
ON
OFF
GND
Voltage output
(red + / black -)
Power switch
POWER
Output ground terminal
MA Conversion button

Picture

Positive

Side

Package

Detail

Current Display

Current display accuracy: 0.01A

Voltage display

Voltage display accuracy: 0.1V

Current FINE / COARSE adjustment knob
Steady flow indicator

Voltage FINE / COARSE adjustment knob
Regulators indicator

Power switch

After power on, press the switch is turned on to work, close to stop working

Voltage Output

Red + / black - / yellow ground terminal for the output