4.15:□□□KG BST-938 :العلامة التجارية : الأفضل نموذج
اسم المنتج : ذكي درجة حرارة لحام محطة تدخين آلة
الحديد لحام \ الحديد الإطار لحام \ تنظيف القطن \ كابل الطاقة \ BST938 :مستلزمات
W استهلاك الطاقة : 70 Vجهد الدخل: 220 فولت / 50 هرتز خرج الجهد : 24
نطاق التحكم في درجة الحرارة : 200 ~ 480 ℃ طريقة الإعداد : مفتاح ضبط استقرار درجة الحرارة : ± 1 درجة (ثابت)
وضع درجة حرارة المدرسة : محاكاة المعايرة الحد الأقصى لدرجة الحرارة المحيطة : 40 ℃
؛ 5 □□lt & :؛ 2 الجهد على الأرض lt & الرقمية معاوقة الأرض : العلامة LCD :وضع العرض
ميزات:
1. مع الصمام الخفيفة وامتصاص الدخان ، يمكن أن تحمي العامل من الدخان وجعل العمل .eaiser
2. مجهزة محولات النحاس النقي ، دائم وتبديد الحرارة سريع . .
3. استشعار الدائرة المغلقة ، درجة الحرارة السيطرة الحواسيب الصغيرة ، شاشة عرض LED مما يجعله ضبط درجة الحرارة على وجه التحديد .
4. العرض الرقمي ، واضحة ومباشرة ، وسهلة في التعامل معها .
5. المواد المستوردة عالية المقاومة للحرارة والتكنولوجيا المتقدمة جعلها ذات نوعية جيدة ودائمة .
6. استخدام مصدر طاقة التيار المتردد ذو الجهد المنخفض يجعله ثابت eletricity ، لا تسرب ، لا تدخل . .
7. نطاق درجة الحرارة من 200 ℃ -480 ℃ والتحكم في درجة الحرارة مستقرة تجعل الحرارة بسرعة وبدقة .
8. تم عزل التيار الكهربائي من سخان تماما من شبكة الكهرباء .
9. جزء من liron متصل بمحطة التحكم في درجة الحرارة من خلال وصلة الهواء و درجة الحرارة العالية المقاومة للكهرباء الساكنة المطاط السليكون (هلام السيليكا).
10. تصميم انقسام ، سهولة التخزين.

PRODUCT DISPLAY

- ☑ Soldering wire is made of Sn, Pb and some chemical activators, which will produce some toxic gases and do harm to human beings, especially to lung and nerve.
- ☑ Digital constant temperatured soldering station with smoke absorber can protect human beings from toxic gases by sbsorbing the somke caused during soldering.
- ☑ Use of imported low noise and high performance motor.
- ☑ Easy to replace filter.
- ☑ Filter is made of foam plastic and activated carbon so it can absorb more and faster.
- ☑ The whole machine is made of ESD conductive material.

PRODUCT SIZE

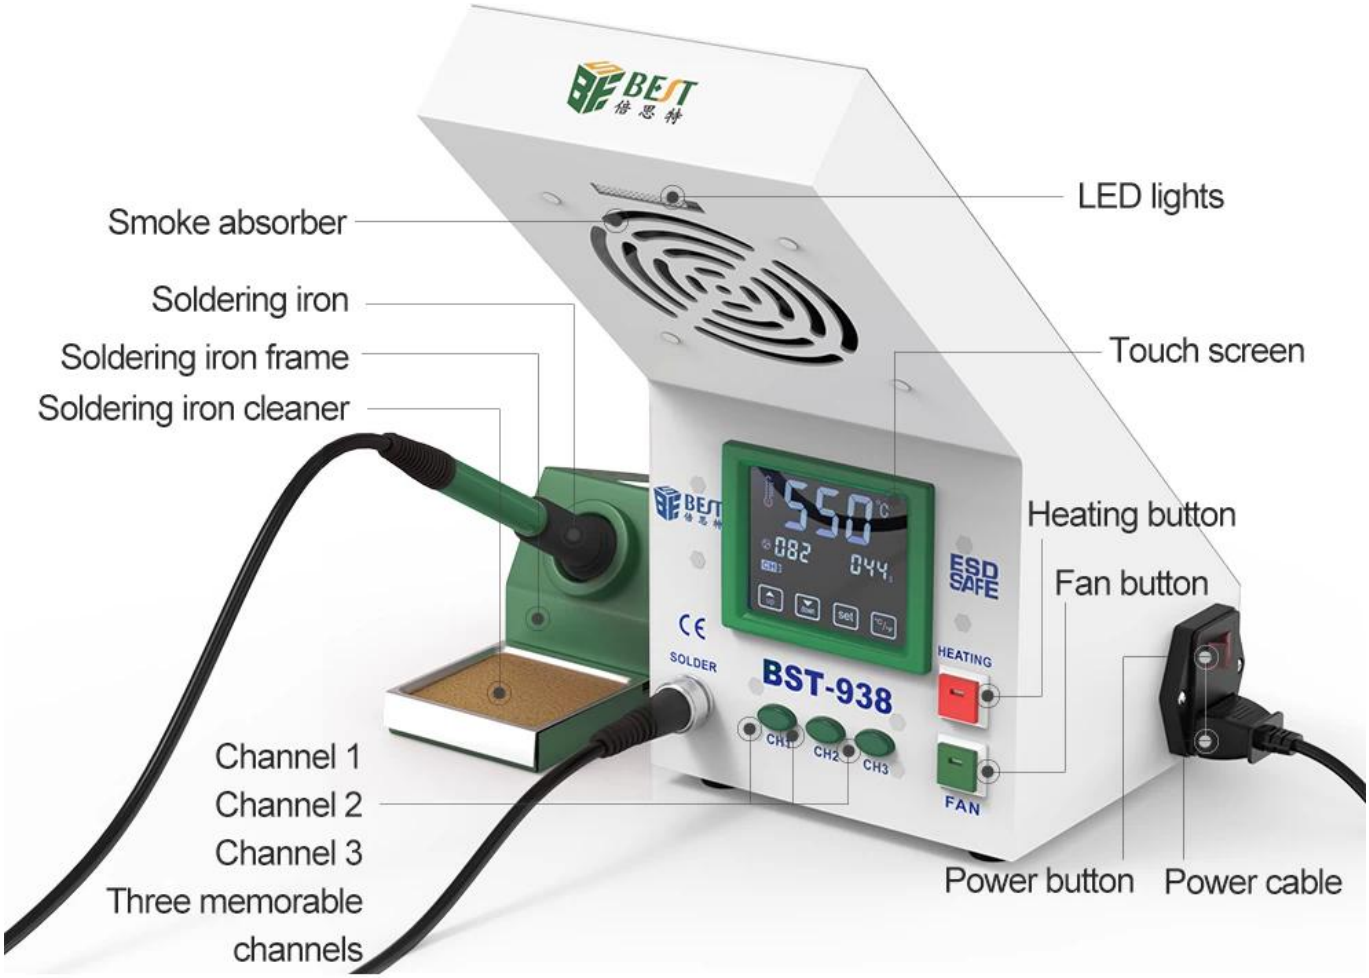

LCD touch display
Easy temperature adjustment
40mm
295mm
150mm
125mm
55mm
160mm
550°
ESD SAFE
BST-93
SOLDER

Detachable smoking sponge
Easy to replace

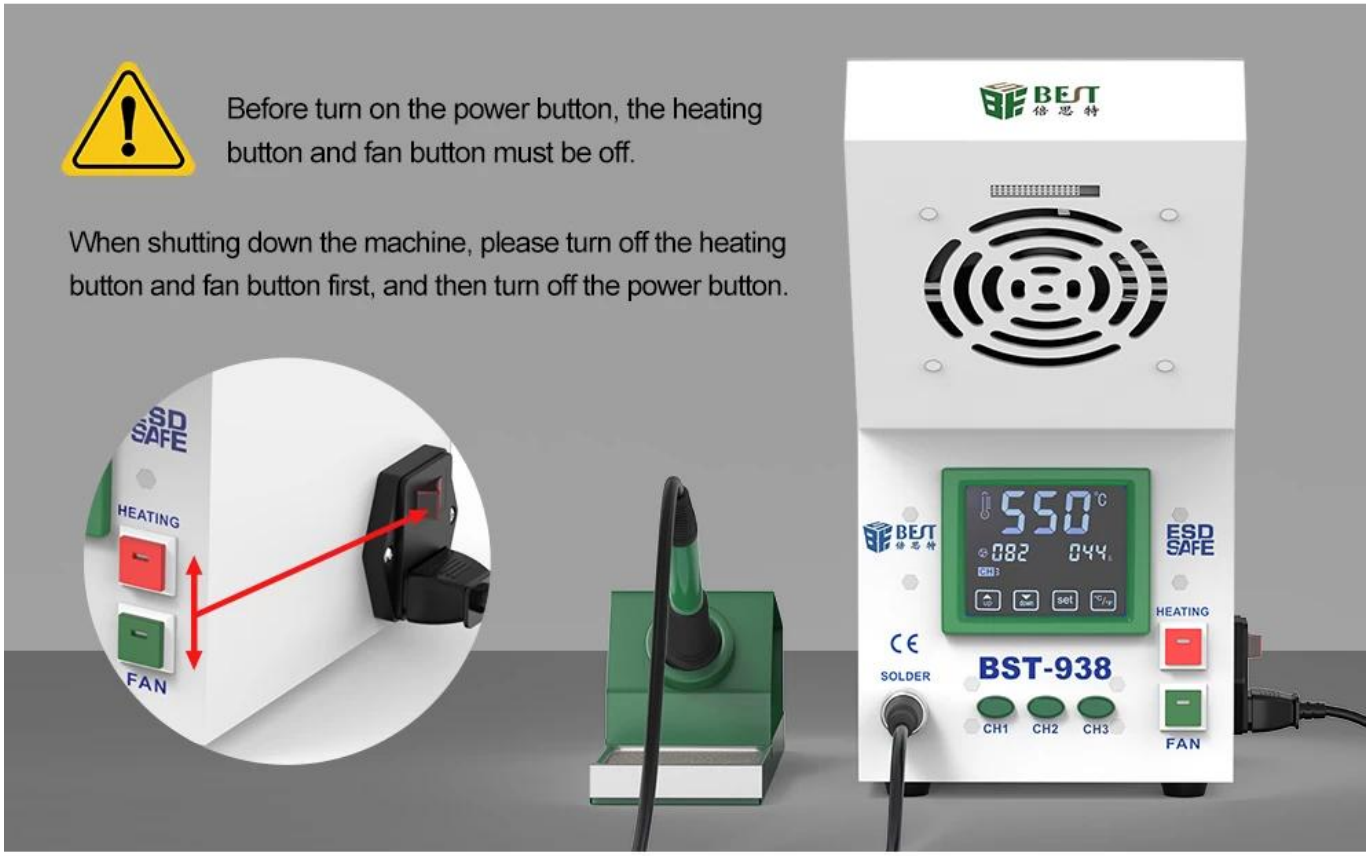

PRODUCT PHOTOGRAPH

Brand	BEST 倍思特	Model	BST-938
Product Name	Intelligent temperature soldering station smoking machine		
Accessories	BST-938 \ Iron soldering \ Iron frame soldering \ Cleaning cotton \ Power cable\ Instruction manual		
Input Voltage	AC 220V±10% 50Hz	Output Voltage	AC 24V
Work Noise	≤45dB	Temp. Range	100℃~550℃
Temp. Stability	±1℃	Display Mode	LCD
Cal. Method	Analog calibration	Resistance to ground	<2Ω
Setting Mode:	Touch screen	Environment Temp.	40℃(MAX)
Voltage to ground	<5mV	Rated Power	145W
Weight	3.75KG	Box	4 sets

Features:
1. With LED light and smoke absorber, Smoking sponge removable, can protect worker from smoke and make work eaiser.
2. Equipped with pure copper transformer, durable and fast heat dissipation.
3. Closed circuit sensor, microcomputer control temperature, LED screen display making it adjust temperature precisely.
4. Digital display Touch screen operation, clear and direct, easy to handle.
5. Imported high temperature resistant materials and advanced technology make it good quality and durable.
6. Using of low voltage AC power supply makes it static eletricity, no leakage, no interference.
7. Temperature range of 200℃-480℃ and stable temperature control make it heat rapidly and precisely.
8. The power supply of heater is completely isolated from power grid.
9. Part of the liron is connected to the temperature control station through the air connection and the high temperature anti-static silicon rubber (silica gel) cable.
10. Split design, easy store.

PRODUCT PHOTOGRAPH

PRODUCT PACKAGING

Package:400*220*220mm

BST-938

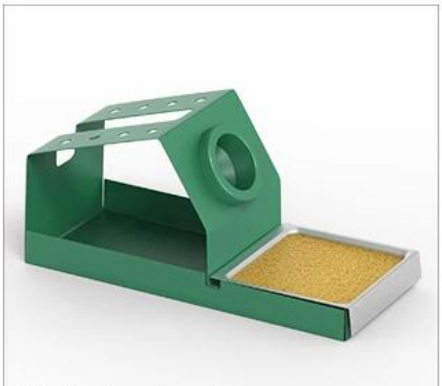 Soldering Iron frame	power cable	Soldering Iron