



# Specification parameters

---


|                         |   |
|-------------------------|---|
| model                   | BST-1503T                                     |
| output voltage          | 0-15V   |
| Output current          | 0-3A  |
| input voltage           | 220V±10% 50Hz                                 |
| working temperature     | 0°C~40°C; Relative humidity:<80% RH           |
| Storage temperature     | -10°C~70°C; Relative humidity:<70% RH         |
| Constant pressure state | Voltage stability $\leq 1\% \pm 3\text{mV}$   |
| Load stability          | $\leq 1\% \pm 3\text{mV}$                     |
| ripple noise            | $\leq 30\text{mVrms}$ (effective value)       |
| Constant current state  | Current stability $\leq 0.2\% \pm 3\text{mA}$ |
| Display accuracy        | $0.5\% \pm 2$ words                           |
| Display resolution      | 0.01V/00.01V                                  |
| electric current        | 0.01A/0.001A                                  |
| Product size            | 215mm long x 85mm wide x 139mm high           |
| Product weight          | 3.2kg   |
| fuse value              | 3.15A   |



# Small machine



(Only 0.4 inches larger than a mobile phone)

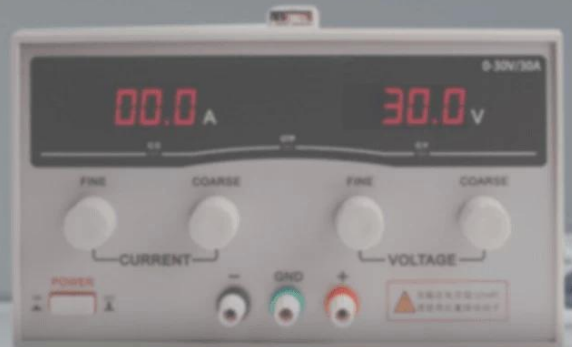


Compared with other DC power supply, more compact, lighter, portable and Compact



Large volume and weight, inconvenient to use




**Intelligent Temperature Control: low noise, turn on when  $\geq 50^{\circ}\text{C}$**



**Large Capacitor**




**Single Phase Transformer: low ripple**

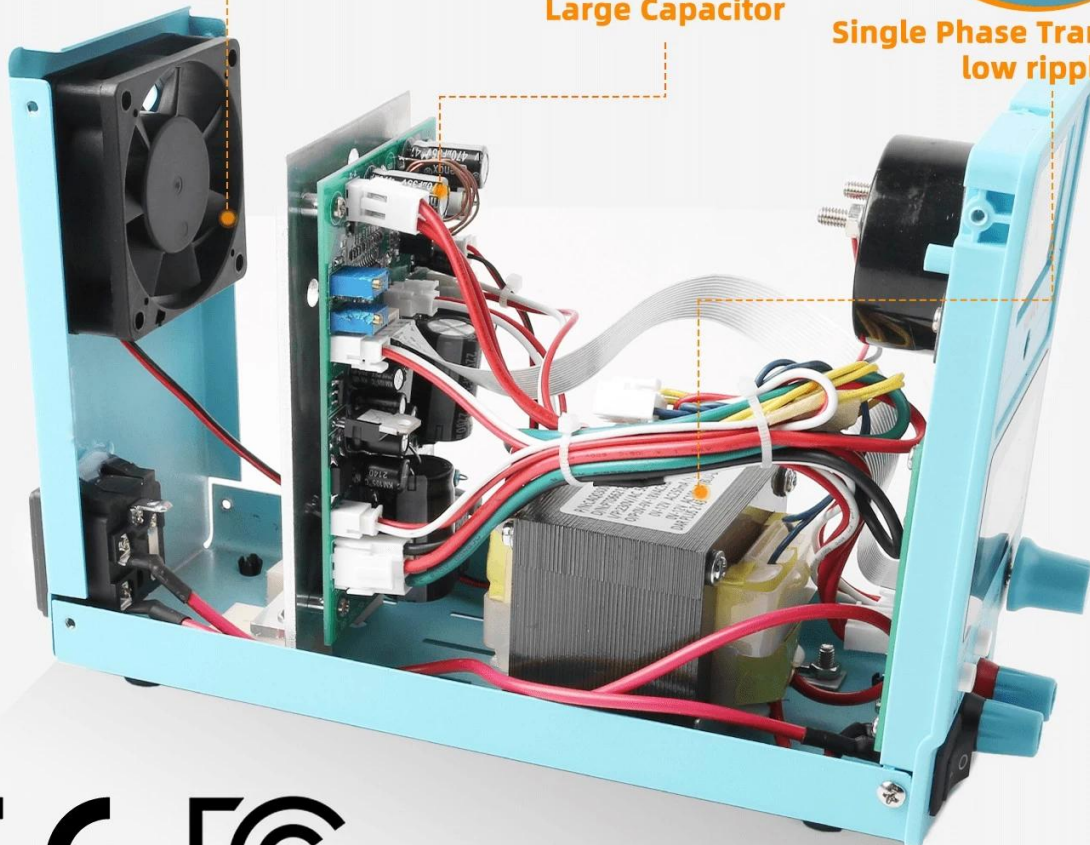

**CE FCC**

< img src="https://cdn.b2b.yjzw.net/files/96/img/2023/07/18/202307181416120199150.jpg" width="100%" />

# FOR PROFESSIONAL REPAIR OF MOBILE PHONES

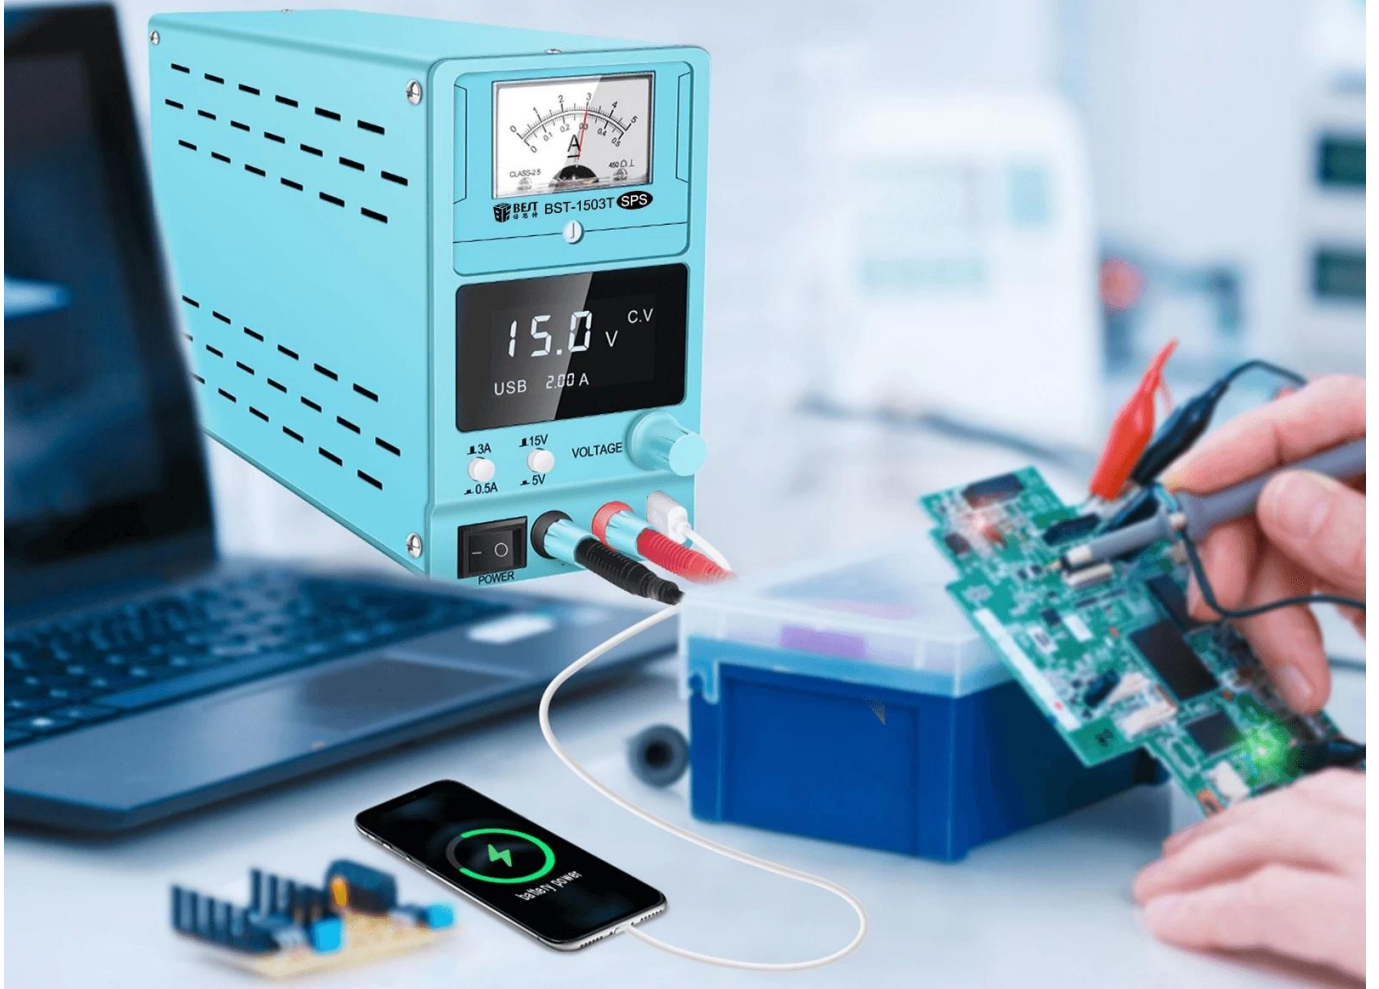



DC POWER SUPPLY  
USER IS MANUAL  
(300W)  
VER:02



BEST 德思特 BST-1503T SPS

15.0 V C.V  
USB 2.00 A

3A 15V  
0.5A 5V

VLOTAGE

POWER

- +

5V/2A