

PRODUCT DISPLAY




PRODUCT SIZE


*Front*




*Side*

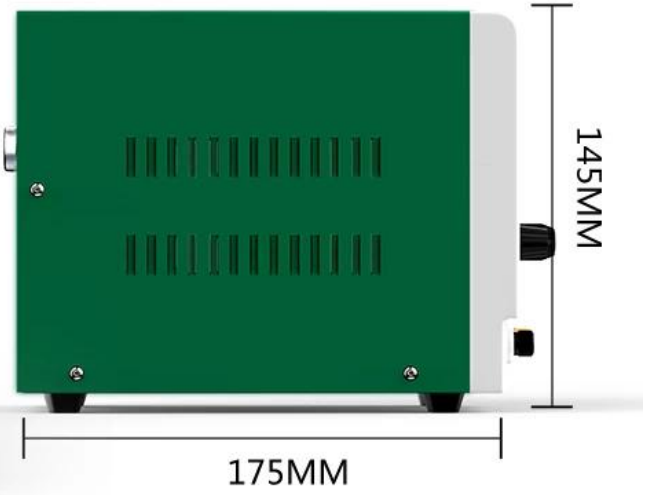


## PRODUCT DETAILS

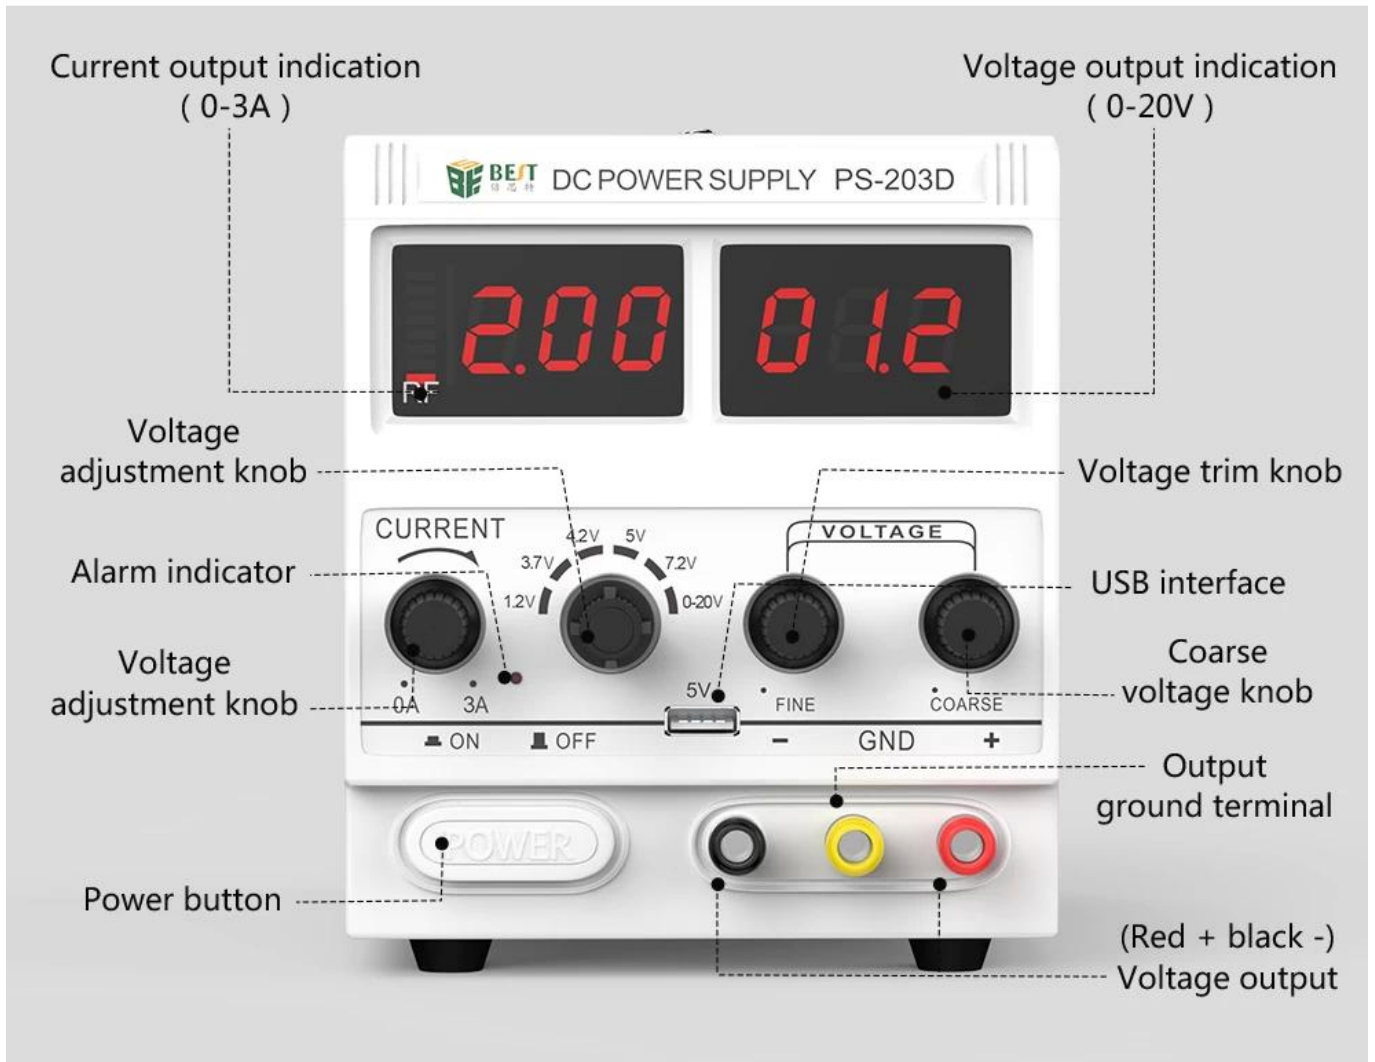

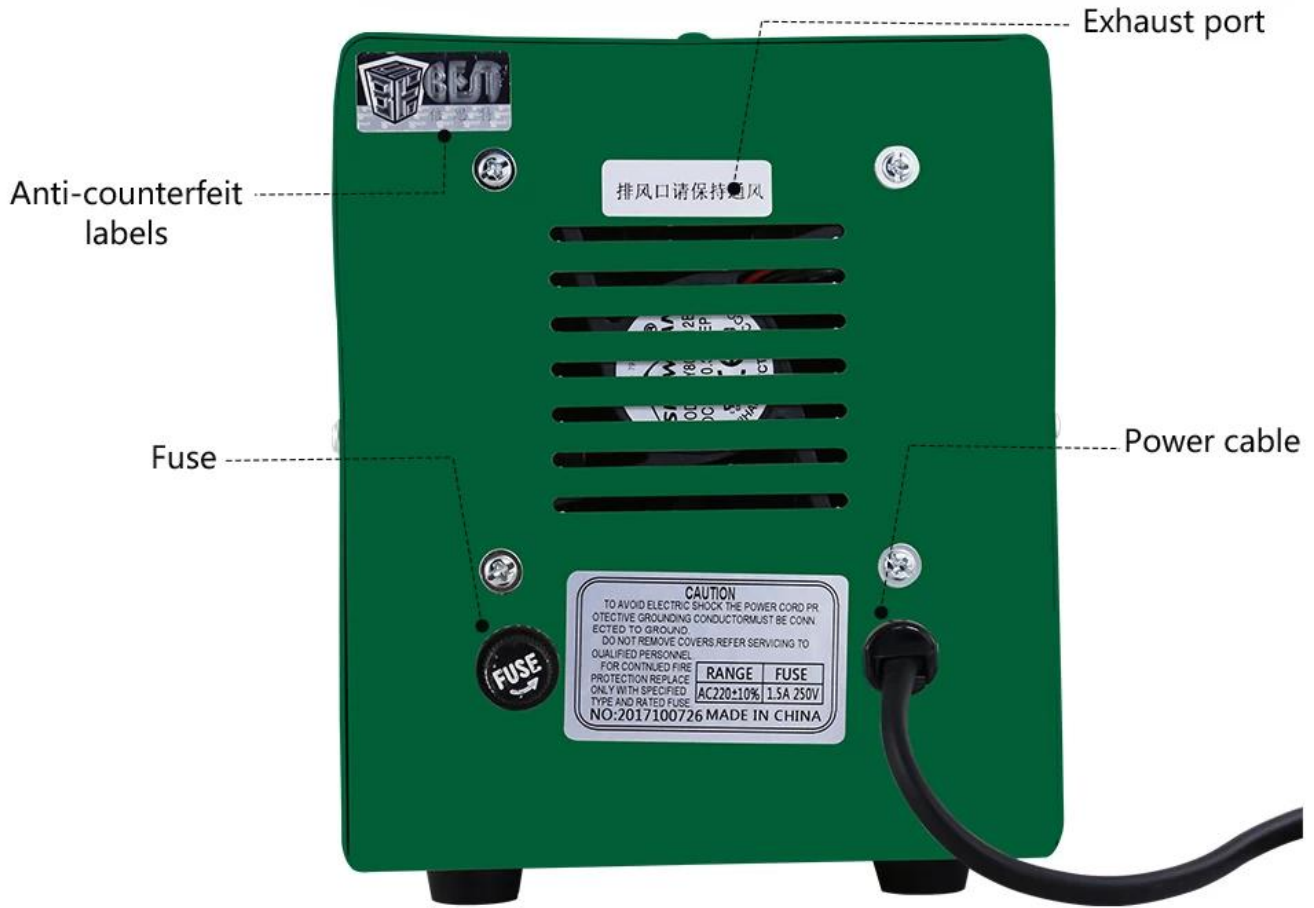

▲ PCB integrated motherboard double-sided chip technology

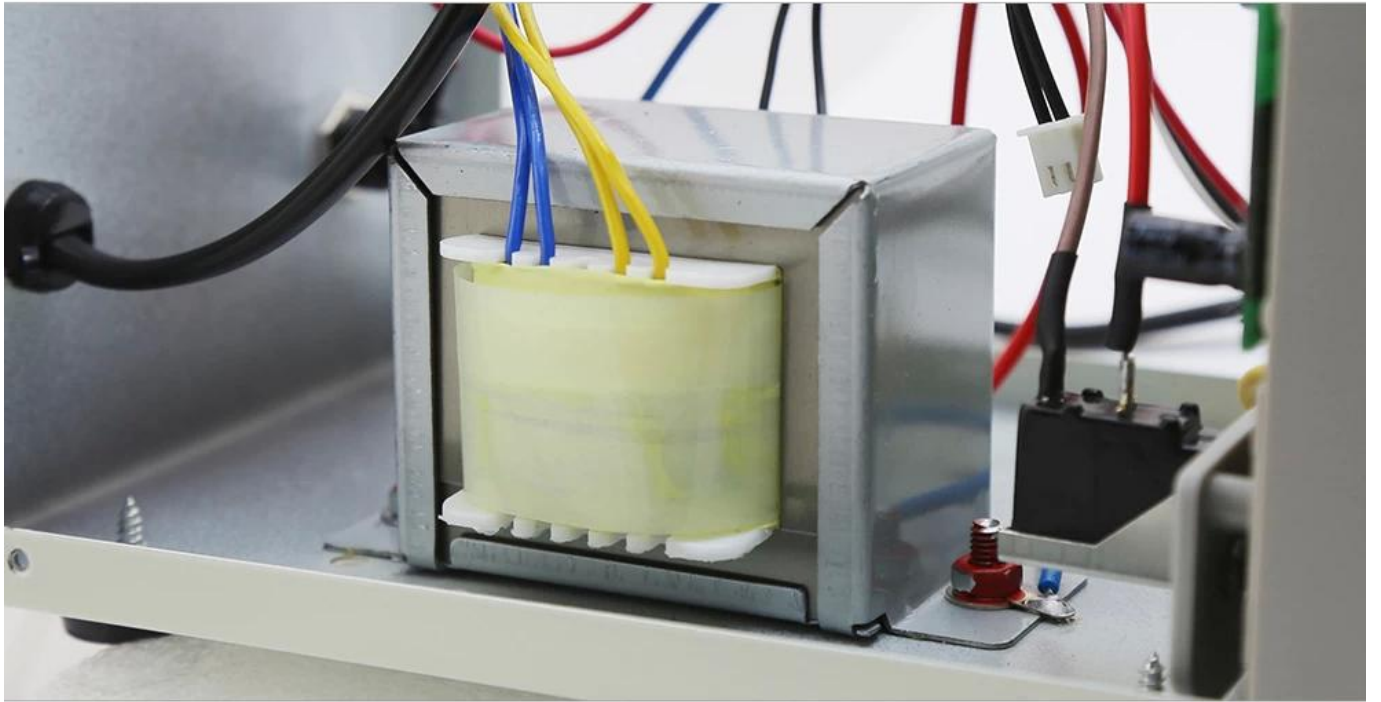

▲ High Power, Pure copper transformer

## Rated working conditions

voltage	220v ± 10%
working environment	-10 °C ~ 40 °C Relative humidity: <90%
Storage environment	-20 °C ~ 40 °C Relative humidity: <80%
Corrugated factor	<= 0.5mvrS (5Hz-1MHz) Iomax> 1A
Features	Short circuit protection / overload protection / alarm function / continuity test / automatic recovery

## Regulated working conditions

Power stability	<=0.01% + 2mV
Load stability	<=0.01% + 2mV (1max<1A)
Recovery Time	<=100us (maximum current <=3A)

## Specifications

Model	PS-1502D+	PS-203D
Body weight	1.6KG	2.2KG
Dimensions	125MM*175MM*145MM	
Voltage and current	0-15V/0-2A	0-20V/0-3A
Features	Short circuit protection, automatic recovery, voltage test, on-off test	
GSM signal detection	<input checked="" type="checkbox"/> Can detect RF signals	
Overload protection current	2A	
Voltage display accuracy	0.1V	
Current display accuracy	0.01A	
Mobile signal strength indicator	Have	
Brush power supply function	No	
Smart cooling	No	Have

# PRODUCT PACKAGING

WEIGHT:2.2KG



203D



Box  
240mm\*130mm\*161mm



Instructions



Test lead test line



Power test line