

PRODUCT PHOTOGRAPH





PRODUCT SIZE



PRODUCT DISPLAY



Display bit: 3 1/2 bits

Accuracy: + 0.5%

Input impedance: 10M


Maximum display: 1999

Power supply: 9V (6f22)

Mode of operation: manual range

PRODUCT PACKAGING

WEIGHT:330G

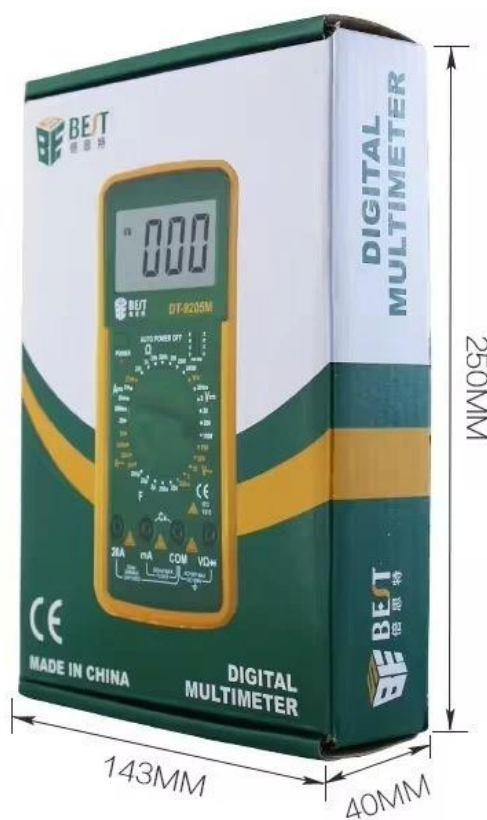

PARTS

PACKING

Parametri del prodotto

Funzione di base	Allineare.	Precisione
Tensione CC	200 mV/2 V/20 V/200 V/1000 V	±(0,5%3)
Tensione CA	200 mV/2 V/20 V/200 V/700 V	±(0,8%5)
Corrente continua	2 mA/20 mA/200 mA/20 A	±(0,8%10)
Corrente alternata	2 mA/20 mA/200 mA/20 A	±(2,0%5)
Resistenza	200Ω/2kΩ/20kΩ/200kΩ/2MΩ/20MΩ/200MΩ	±(0,8%3)
Capacità	200uF/20uF/2uF/200nF/20nF	±(2,5%20)
Caratteristiche speciali	9205M	
Diodo, test audio	✓	
Allarme interruzione linea	✓	
Display a bassa tensione	✓	
Spegnimento automatico	✓(può essere impostato manualmente)	
Protezione delle funzioni	✓	
Fusibile da 200 mA	✓	

Fusibile da 20A	√
Protezione dagli urti	√
Impedenza di ingresso	10MΩ
Operazione	Gamma manuale
Visualizzazione massima	1999
schermo LCD	59×31 mm
Energia	9 V (6F22)