パッケージ&配達

パッケージの詳細

リテールパッケージ：ペーパーボックス

パッキング：8sets / carton

納期

3日以内

Fatory卸売業真空LCDタッチスクリーンガラスセパレータマシン

製品説明

1.自動加熱金属板、最高温度は400摂氏です

2.内部の安全電源システム、漏電の問題を回避する

3.静電気防止材を使用し、LCDおよびフレックスケーブルが静電気から損傷するのを防ぎます

簡単インストール

5.プレート上のタッチスクリーンガラスを押す4つの強いアーム

タッチスクリーンを傷つけることなく保持するための滑らかな金属板

7.あなたはiPhoneと銀河系で仕事をするとき、温度は80℃~100℃に設定する必要があります...

あなたが分離するために使用するワイヤーの寿命を長く持続させる2つのベアリングは、あなたの手が高温プラットフォームによって傷つくのを防ぐ

9. LCDまたはLEDスクリーンアセンブリに適合

注意：

動作時に110度以上の熱を発生させないでください。そうしないと、高温によって電話アクセサリが破損する可能性があります

仕様

電圧供給

110V / 220V、60Hz / 50Hz

力

250ワット

互換性があります

ほとんどすべての携帯電話（タッチスクリーン≤7インチ）

加熱サイズ

110mm * 190mm

サイズ：

150 * 260 * 120 mm

重量

3kg

パッケージング

カートンボックス

PRODUCT DISPLAY

PRODUCT SIZE

PRODUCT DETAILS

PRODUCT FEATURES

Front

Behind

Monitor board

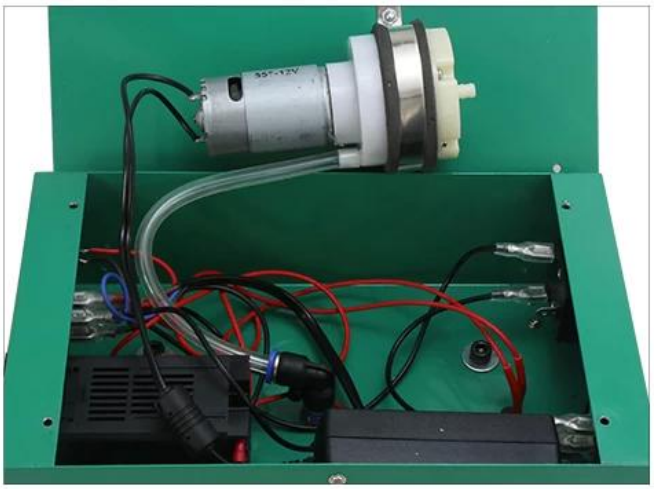

Internal structure

Model: BST-988 Power supply voltage: AC 100V-240V Power: 250W

Features 1: Built-in vacuum pump, strong adsorption, high vacuum machine points one

Feature 2: high separation precision does not hurt the screen, built-in temperature control chip

Feature 3: Durable, easy to operate, safe and reliable

PRODUCT PHOTOGRAPH

PRODUCT PACKAGING

WEIGHT:3KG