

5 6 00 00 0 CR-V 00 000 00 00 0000 00 00

00 00

60 # CR-V 00, 00 00 0 00, 300 0000 00, 000 0000 00 00 00. 000 00 000 0000 00 PVC 000 0000 0000 000000  
0.

00

00

00 0000

00

60 # 00 000 0

000

00 00

00 00

000

00 00

PVC 00

00

000 000000 00 000 000000.

00

000 00 + 000 00

0000 00

OEM, ODM, 000 00 000 00 00000 0 0 00 00000 00

00 00

00 000 000 000000.

00 :

00 000, 00 00, 0000 leefover 000 00 000 00000 0 000000.

000 000 00 00 00.

IC 00 00 0 000 00

00 00.

000 0 00 00 0 00 00.

00000 00 00.

D.I.Y 000 % s 00 000 00.

PRODUCT DISPLAY

---



## PRODUCT SIZE

Material:high quality alloy steel(60CR-V)


Process:using repeated forging,the surface is polished after grinding and processing by precision machining

Hardness:the overall hardness is HRC38-42 the blade hardness is HRC56-62

Shear capacity:HRC20 below

Hard wire  $\Phi$ 1.5mm

soft copper wire,aluminum wire  $\Phi$ 0.1-2.0mm

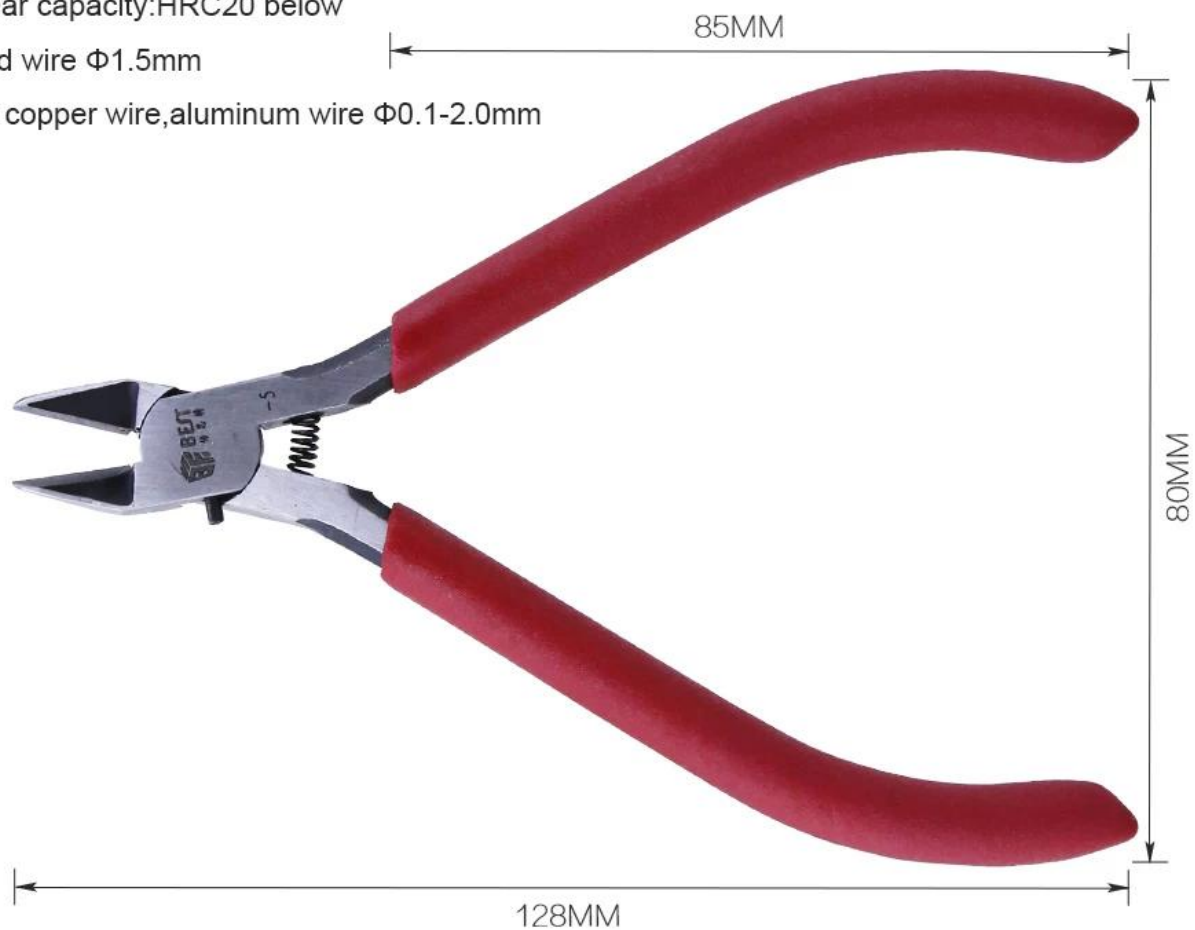



## PRODUCT DETAILS



Front



Back side

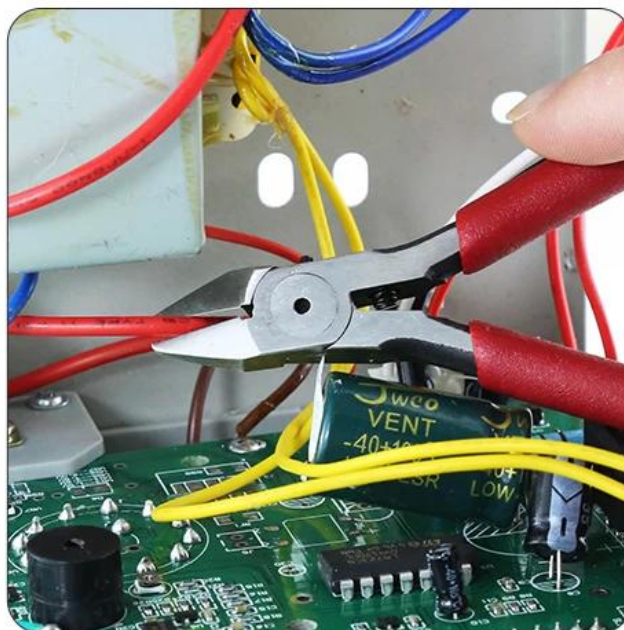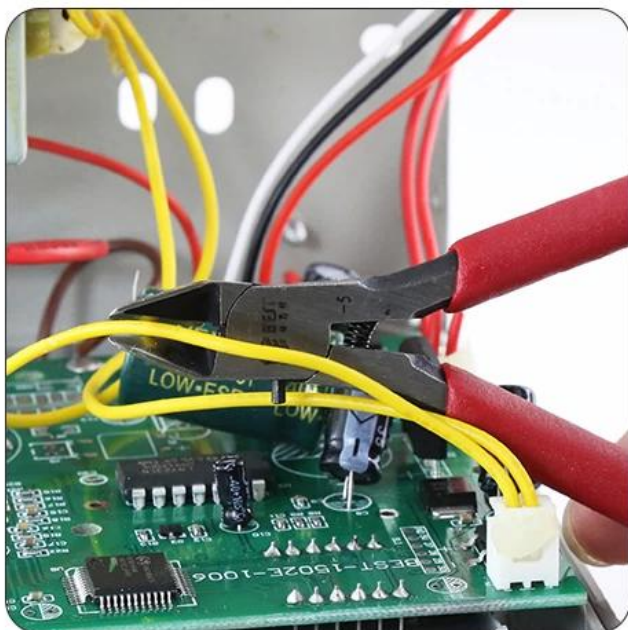

### User manual

#### Warning

This model is not insulated tools. Please use it when power off.

#### Attention

- ① To protect user safe, please use protective glasses.
- ② As the cut material will fly out, make sure no one beside you and no easy damaged things beside you, then begin working.
- ③ This product is not a dedicated pressure equipment.
- ④ When stored, please assure the blade at the closed state and can not be touched by children.
- ⑤ Do not let the plier tip rub something.
- ⑥ Please do not directly touch the blade part with hand.
- ⑦ Do not use in cutting hard materials and steel wire, etc.
- ⑧ Do not use the pliers above its cutting capability and coarse wire.

PRODUCT PHOTOGRAPH

---





# PRODUCT PACKAGING


WEIGHT: 76G



180MM

FRONT

75MM

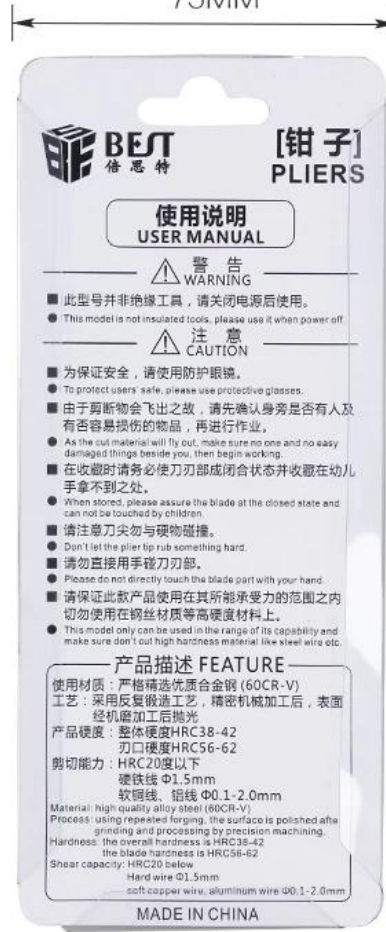

BACK