


PRODUCT DISPLAY



PRODUCT SIZE



PRODUCT DETAILS

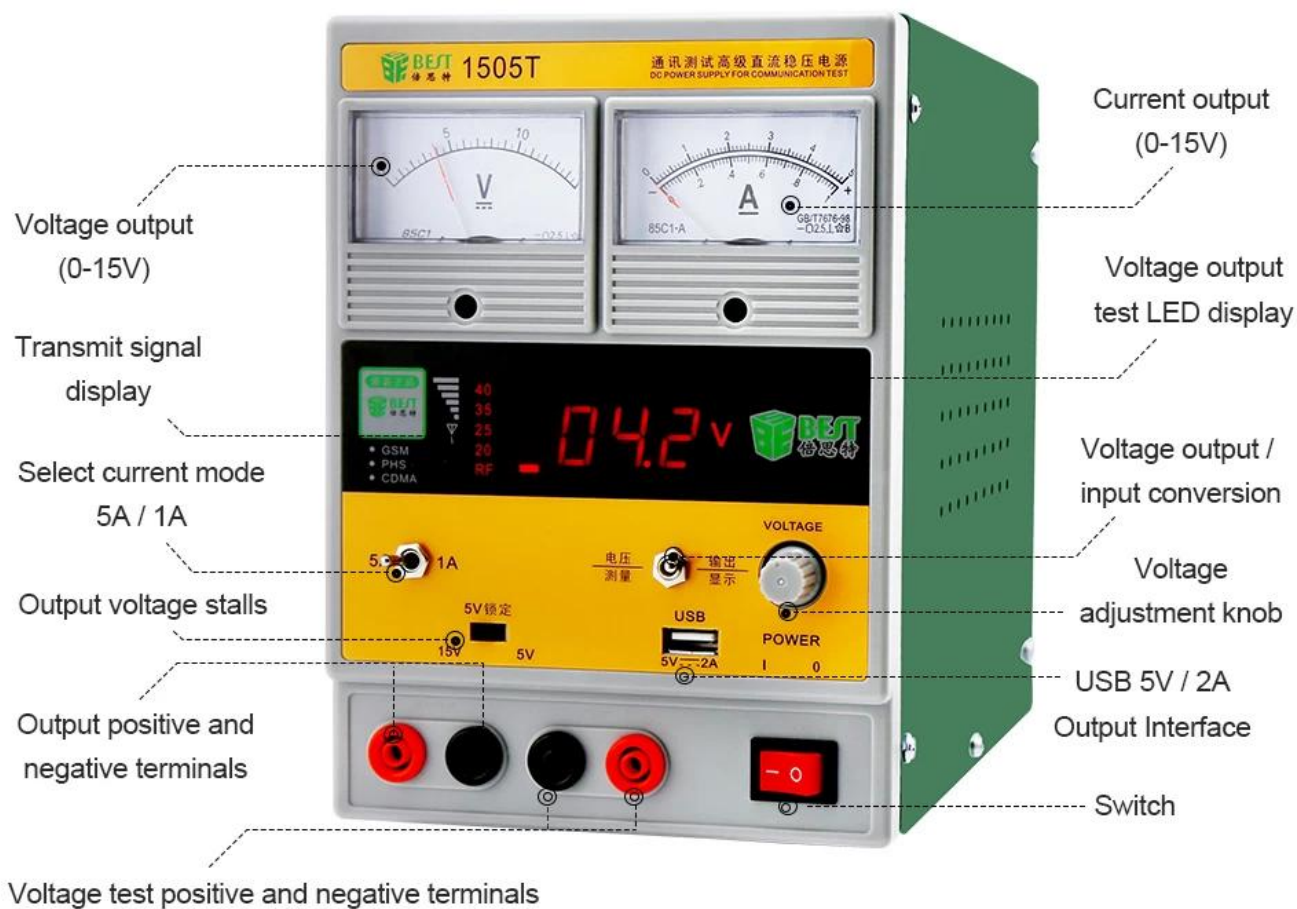

Voltage output
(0-15V)

Transmit signal
display

Select current mode
5A / 1A

Output voltage stalls

Output positive and
negative terminals

Voltage test positive and negative terminals

Current output
(0-15V)


Voltage output
test LED display

Voltage output /
input conversion

Voltage
adjustment knob



USB 5V / 2A
Output Interface

Switch

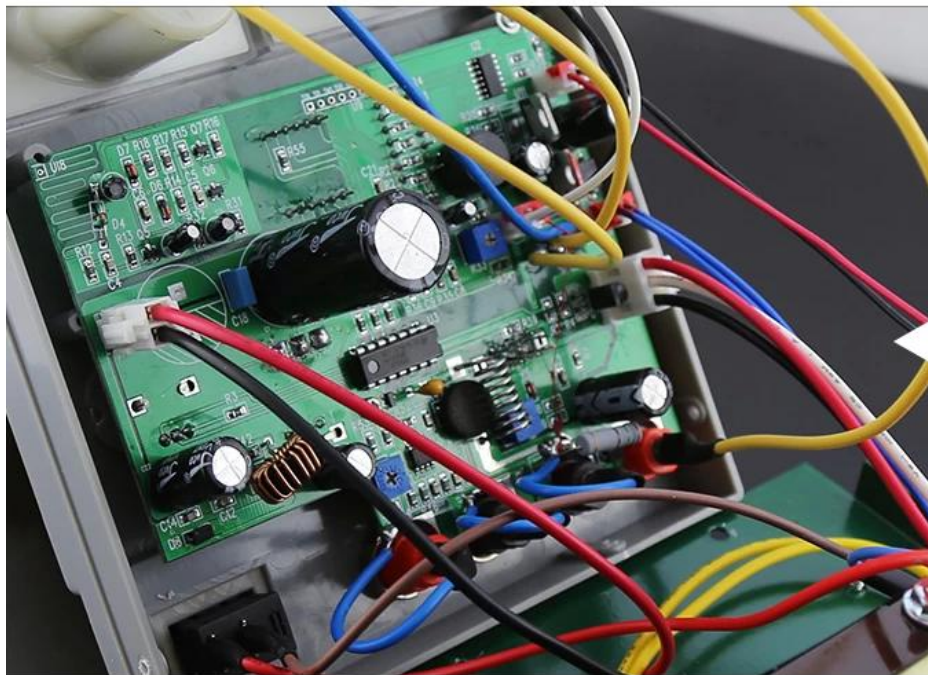

*Integrated motherboard
(reducing the number of
multi-line connected
together, performance has
greatly improved in all
aspects) Model and model
unified motherboard
(BST brand)*

*Large transformer:
IE6636 transformer,
pure copper cable,
the performance of
output voltage stability.*

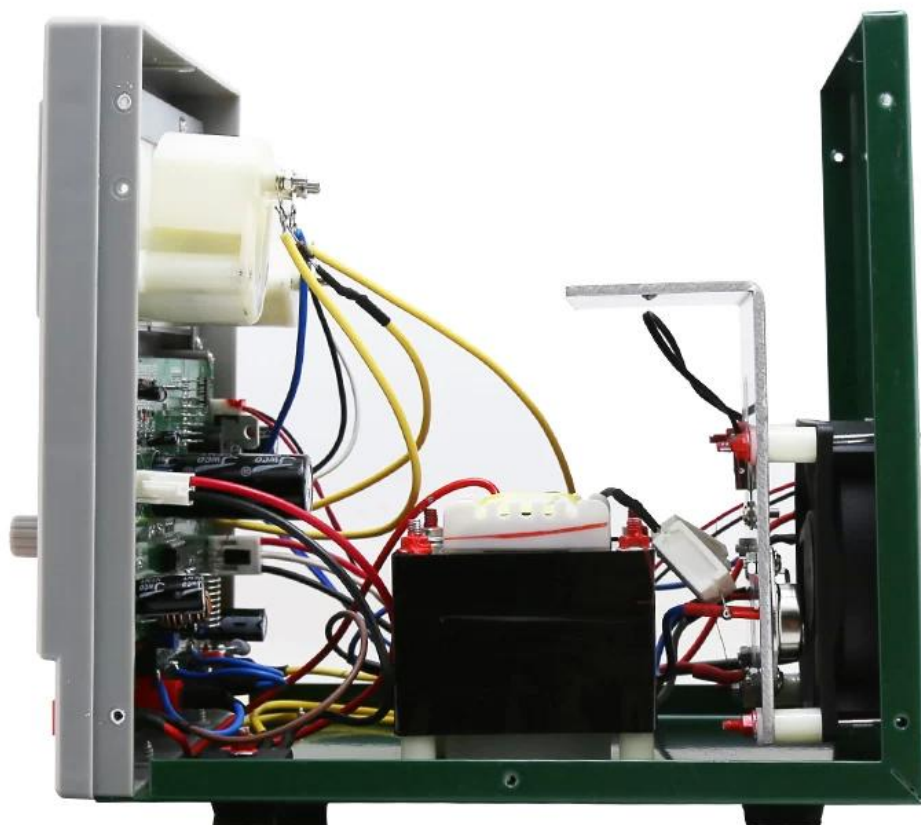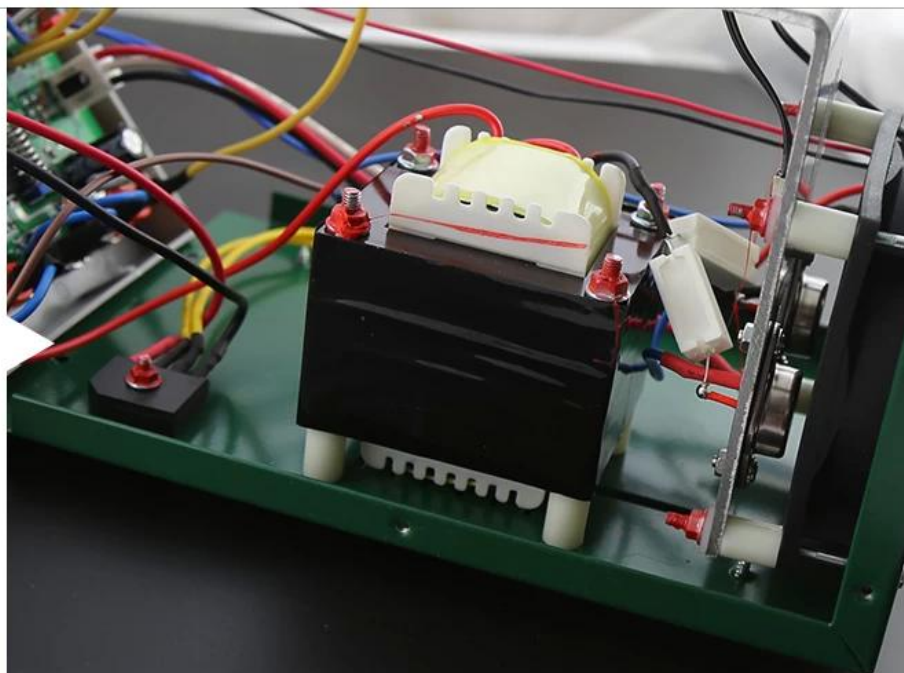

Rated working conditions

voltage	220v ± 10%
working environment	-10 °C ~ 40 °C Relative humidity: <90%
Storage environment	-20 °C ~ 40 °C Relative humidity: <80%
Corrugated factor	<= 0.5mvrs (5Hz-1MHz) Iomax> 1A
Features	Short circuit protection / overload protection / alarm function / automatic recovery

Regulated working conditions

Power stability	<=0.01% + 2mV
Load stability	<=0.01% + 2mV (I _{max} <1A)
Recovery Time	<=100us (maximum current <=5A)

Specifications

model	PS-1505T
Body weight	3.2KG
Dimensions	140MM*225MM*200MM
Voltage and current	0-15V/0-5A
Features	Short circuit protection, automatic recovery, voltage test
Overload protection current	2A
Voltage display accuracy	0.1V
Current display accuracy	0.01MA
Short circuit and overload protection alarm function	Have

PRODUCT PACKAGING



01: Mainframe maintenance power + power cord

03: Chinese and English manual

02: 5A clip line

04: BEST brand packaging