

0000

- .1 0000000 0000000000 00 0000000 00 000000 0000000 00000000 00000000 00000 0000 00 0000000 0000000
- .2 0000 0000000 00 000000 0000 0000000 00 0000 00000 00 000000 0000000
- .3 000000 0000 000000 00 00000000 00 000000000 00000 00000 & 0000 0000000 0000000
- .4 0000000000000 0000000 00000 & 000000 00 0000 00 00000000 0000000
- .5 0000000000 0000000 0000000 000000 0000000 00000 0000000000 0000000000
- .6 0000 0000000000 000000 0000000000000000 000000 000000000000 00000 00000000000 00000 000000 0000

00000

0000000 0000000 0000000000 0000000000 00000 0000000
 000000 0000000000 0000000000 :000000000
 0000000000 0000000000000 :0000000000 00000000000
 000000 0000 00 0000
 000000 00000 000000 0000
 0000 (L * W * :0000000
 110MM 160MM ~
 000000 + 000000 :000000
 20 :000000000PCS / 000000
 0.6 :00000000 0000kg / 000000


0000 --0000000000 00000000 0000000 0000000 0000000 0000000000 0000 .0000000 00 0000000 0000000 0000000
 000000000000000 0000000
 0000 .0000000000 0000000 00000 --0000000000000000 00000000 00000000000

00 0000000000000000 0000 0000000000 00 0000 0000000 .0000 0000000000 00 0000000000 00 00000000000 00: cn200028099

PRODUCT DISPLAY



PRODUCT SIZE

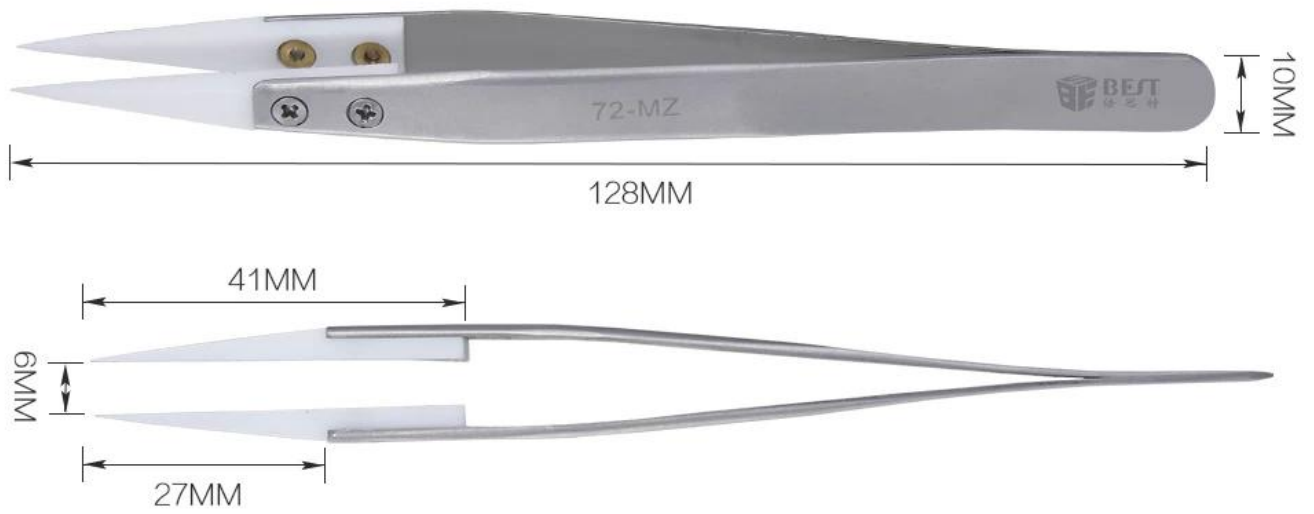

PRODUCT DETAILS

Head wear-resistant, corrosion-resistant High temperature ceramic material
When two tip are folded, smooth seamless



PRODUCT PHOTOGRAPH





PRODUCT PACKAGING

