

# الرقمية لحام الحديد محطة led فولت محطة لحام BEST-858D 110/220 بغا محطة لحام بندقية الهواء الساخن desoldering

## وصف المنتج


1. اختياري 220V / 110V العرض الرقمي الحرارة بندقية LED
2. درجة مئوية 480-2. درجة الحرارة السيطرة 100 درجة
3. فراغ منفاخ الهواء و تدفق الهواء الناعم
4. سعر المصنع ، ضمان تجارة المورد
5. النظام oem قبول النظام الصغيرة و .

## استعمال

1. الخ BGA و PLCC ، QFP ، CHIP ، مثل SOIC ، unsoldering مناسبة لمكونات متعددة
2. و حام المطاط preheating ، إزالة الجليد ، depainting ، للتطبيق على تفتيح ، التدفئة .

## PRODUCT DISPLAY

# Single-digit lead-free spiral heat gun

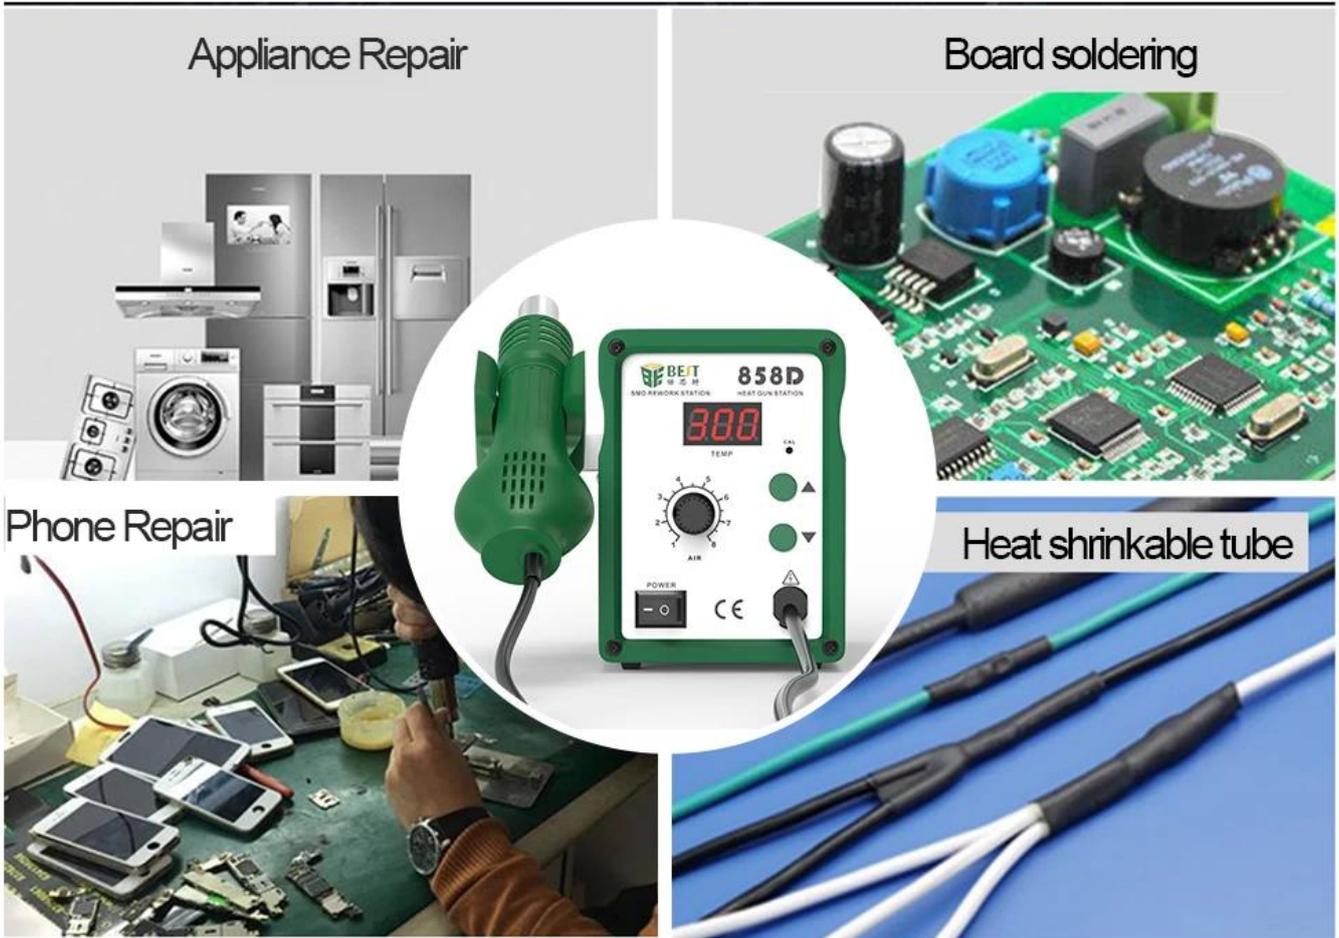

PRODUCT SIZE



# PRODUCT DETAILS



## PRODUCT FEATURES




Front



Behind

Brand:		Name:	Single-digit lead-free spiral heat gun
Model:	BST-858D	Rated voltage:	AC 110/220V 50/60HZ
Rated power:	650W	Airflow:	120L/min (Max)
Air gun temperature range:		100 ° C - 480 ° C	
Weight(including packaging):	1.7KG	Size:	Packing: L265*W170*H145mm
			Machine: L100*W148*H133mm
Accessories:	858D, wind gun nozzle 5, 8, 10 mm, power cord, air gun handle, wrench, starter		
Features:	1. High temperature resistant silicone wire		
	2. Imported ceramic heating core, the handle is made of high temperature resistant silicone wire.		
	3. LED air gun temperature display , temperature is accurate and stable, clearly visible		
	4. When the air gun is placed on the bracket, it will automatically enter the cooling and cooling standby. When the air gun is picked up, it will heat up quickly.		
	5. High power, fast heating, anti-static, temperature adjustable		


High-quality heating body warming fast  
 Incoming ceramic heater, fast heating,  
 high temperature, long life, real material

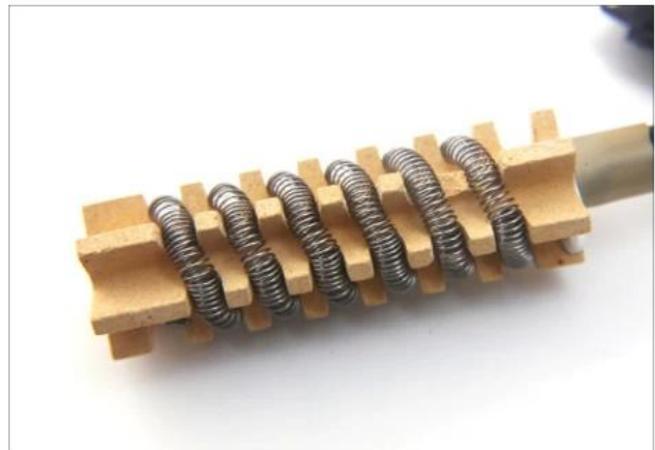

Rapid temperature rise  
durable Intelligent, put back on the  
bracket to automatically cool down




temperature resistant  
silicone wire.

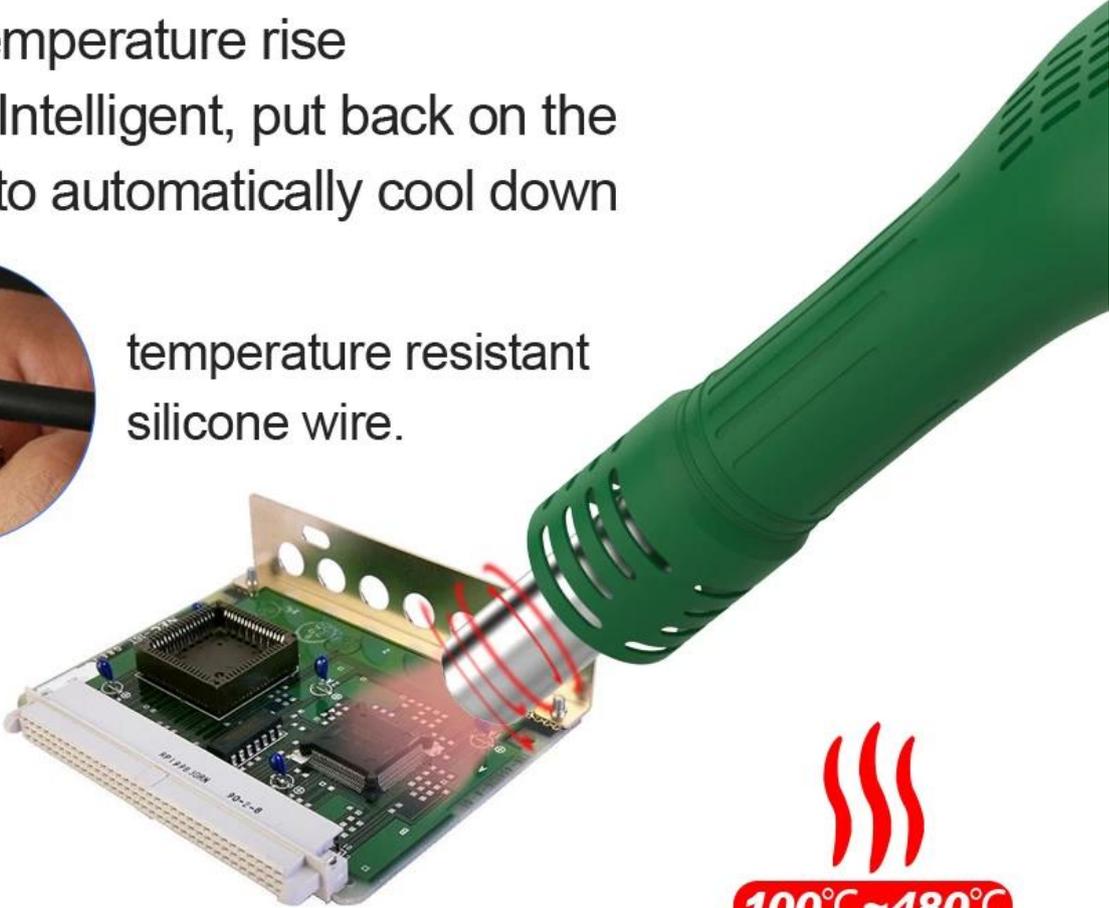

100°C~480°C

Pure copper transformer

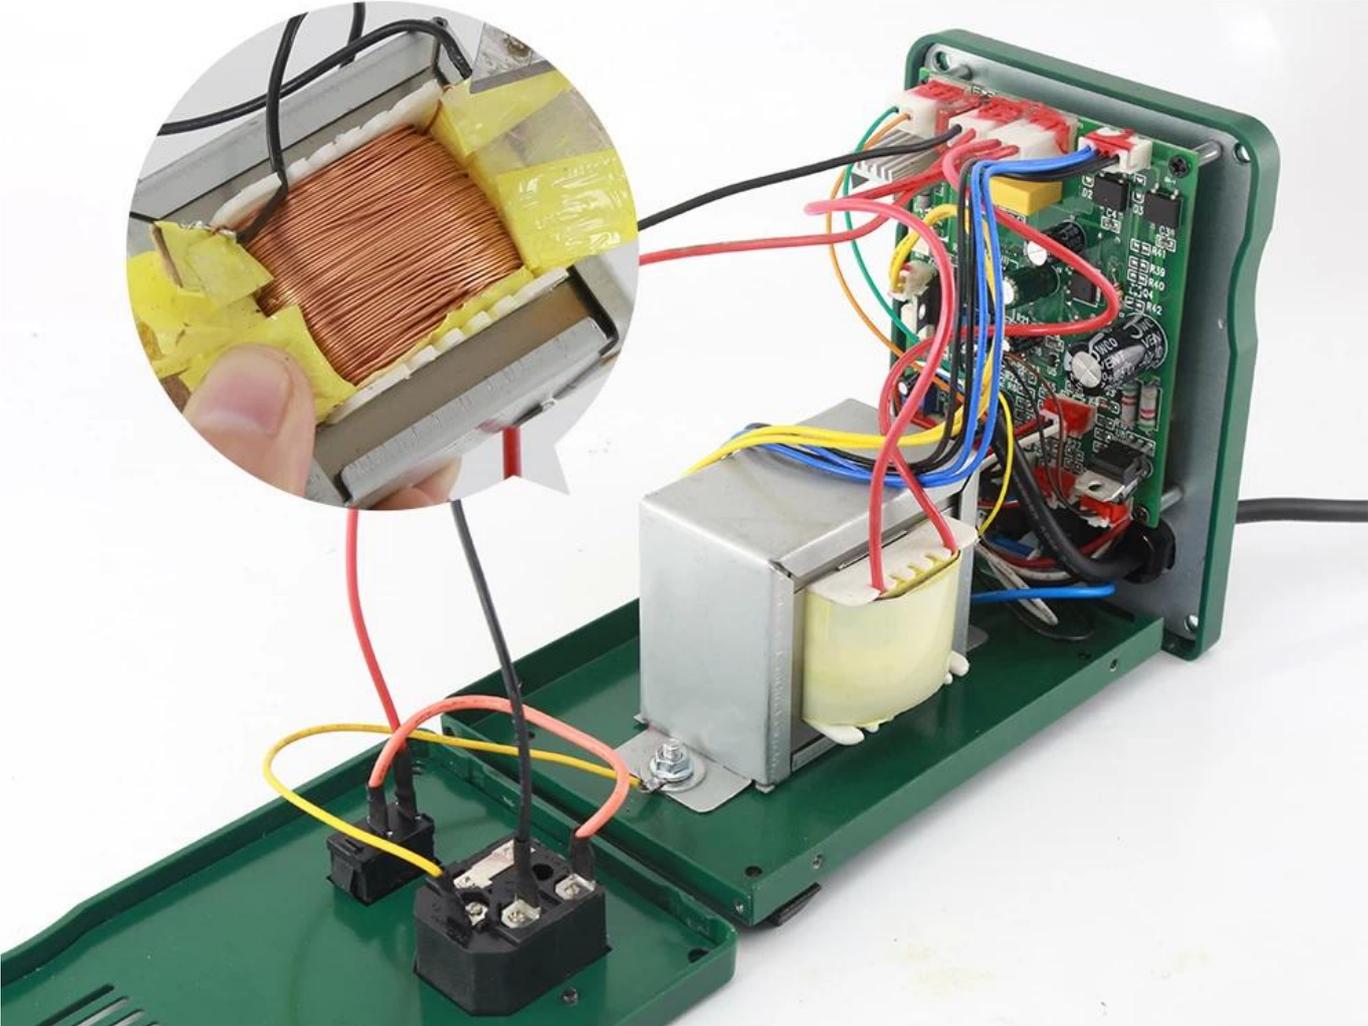

## PRODUCT PACKAGING



Package:  
265\*170\*145mm



BST-858D



Power cable



Wind gun nozzle  
5, 8, 10mm



Wrench



Starter