

□□□□□□

□□□□ Sn45 / pb55

N.W. 100 □□□□


□□□□□□ 0.8 / □□□□□□□ 0.3 □□□□□ □□□

2.25 □□□□□□ □□□□□□□

HIGH PURITY SOLDER WIRE



Product Usage

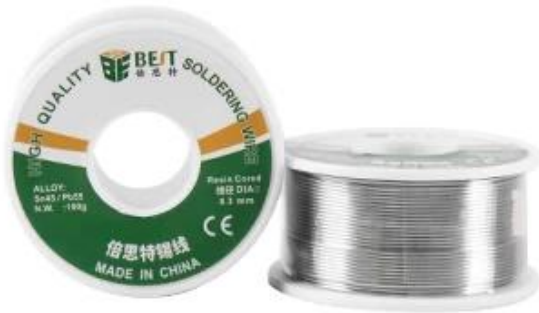

ALLOY	Sn45 / Pb55
N.W.	100g
WIRE DIAMETER	0.3 / 0.8mm
PACKAGING SIZE	54.99x27.44mm
PRODUCT TYPE	Tin wire
COLOPHONY PERCENTAGE	2.25%

▼ CHARACTERISTICS

This product can be used for welding various products. It has 45 percent high purity tin, low melting point, fast welding, good fluidity, neat coiling and smooth surface...


PRODUCT INFORMATION

SMOOTH SURFACE AND EVEN DISTRIBUTION OF ROSIN IN THE LINE

GOOD RESISTENCE, NEAT WINDING




There is less residue after welding, the solder joint is bright.
The impedance is high and the electric performance is excellent.

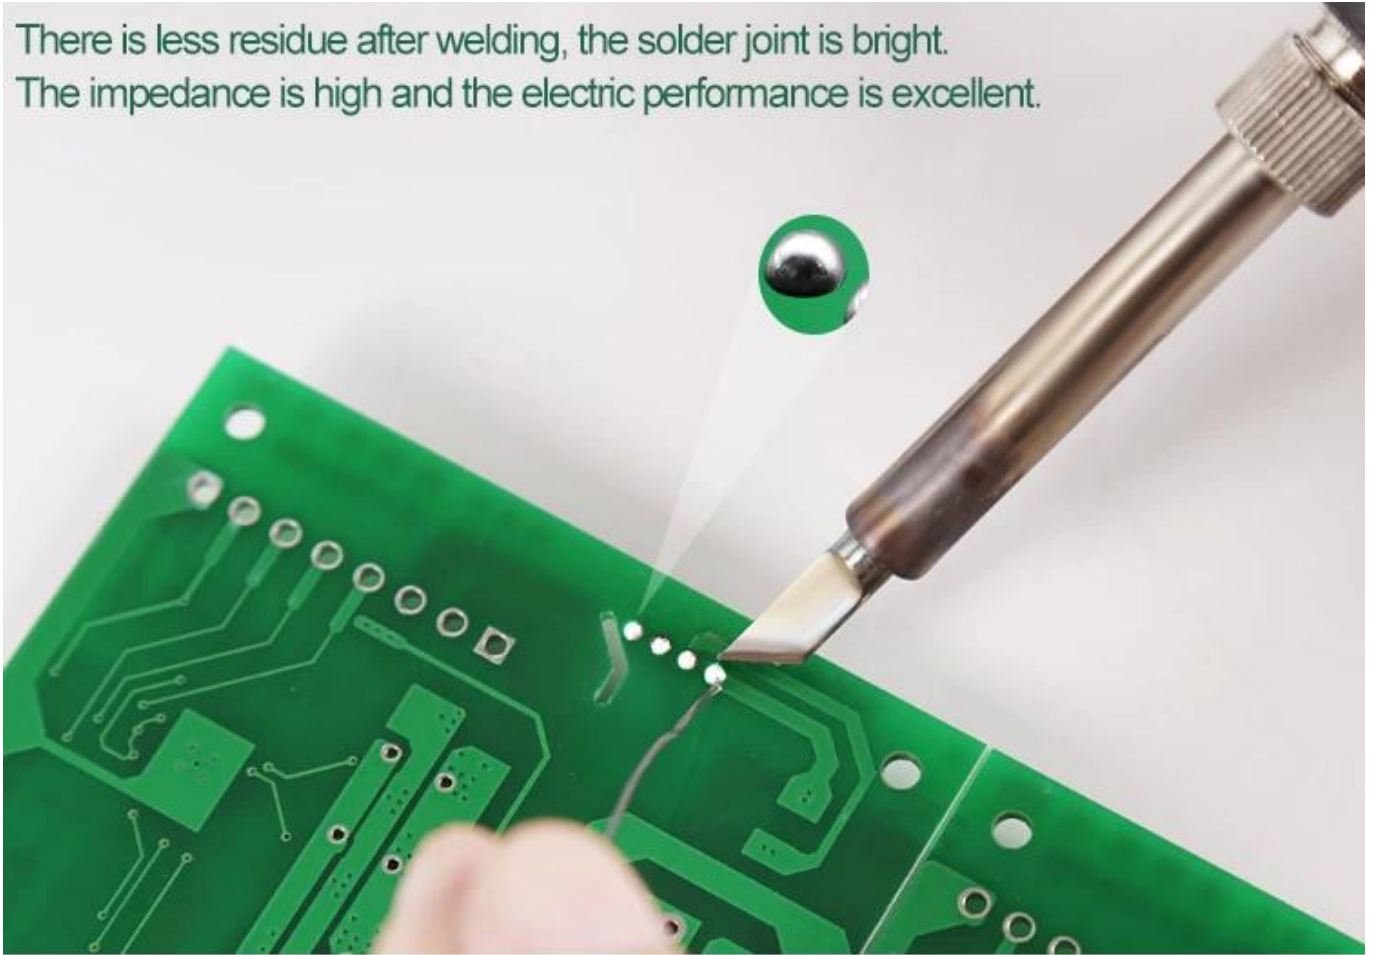

CAN BE USED FOR WELDING A VARIETY OF PRODUCTS



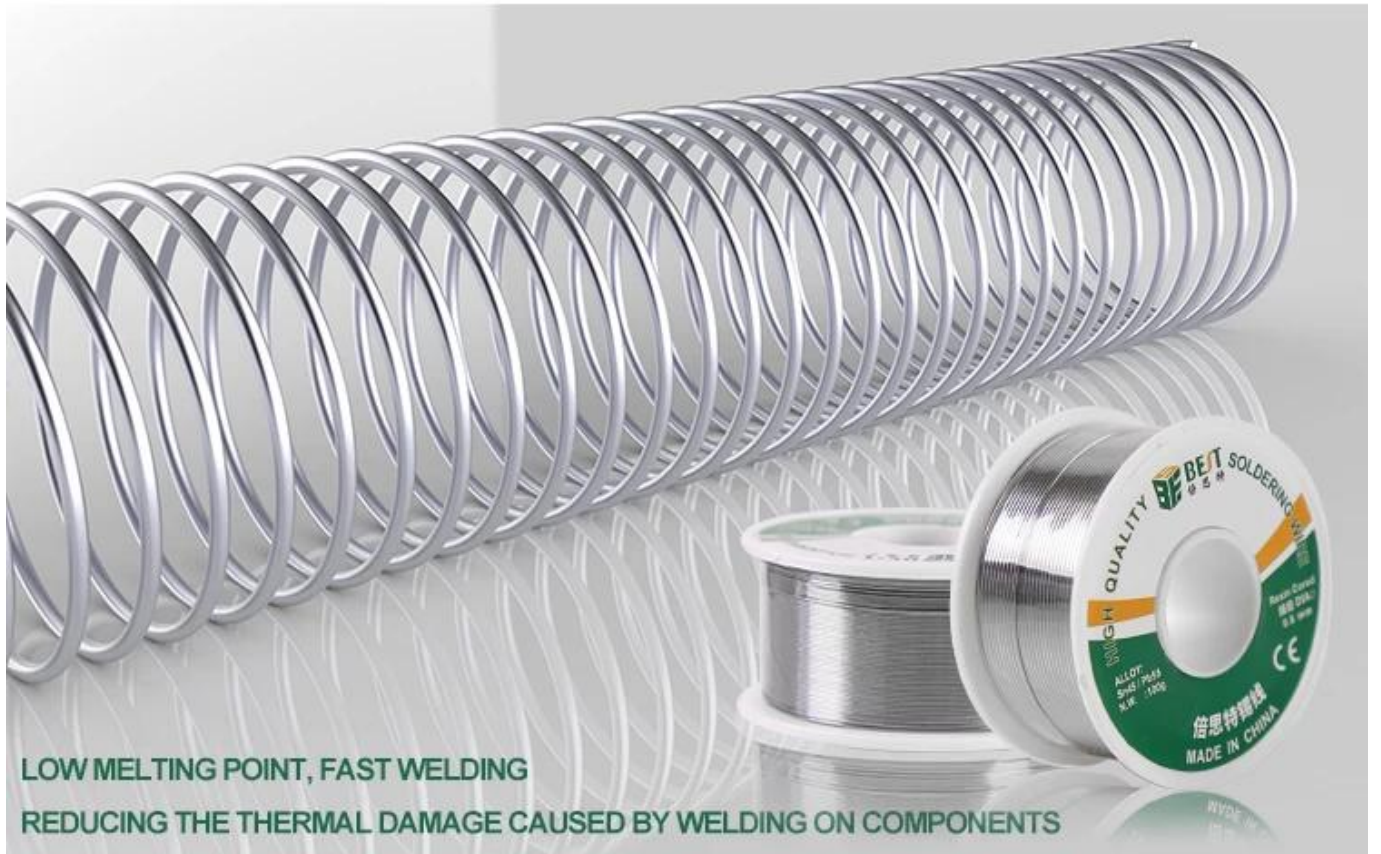

LOW MELTING POINT, FAST WELDING
 REDUCING THE THERMAL DAMAGE CAUSED BY WELDING ON COMPONENTS

PRODUCT SIZE




54.99mm



27.44mm

Wire diameter 0.3mm

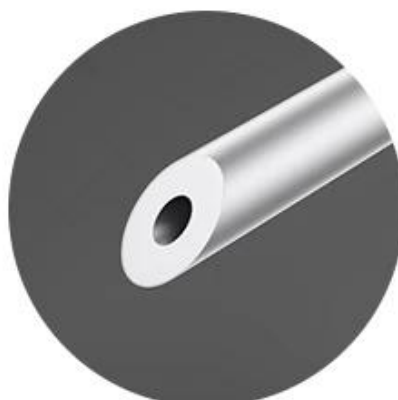

Wire diameter 0.8mm

