

000000 000000 000 45-7 :0000000

 $\ \square\square\square\square\square\square$ $\ \square\square\square\square$ $\ \square\square\square\square$ $\ \square\square\square\square$ $\ \square\square\square\square$ $\ \square$ $\ \square$

Overviews



Product Usage



N.W	4.7kg				
Objective lens	Continuous zoom 7x~45x				
Eyepiece	Binocular wide angle WF10X				
Power	220v-50hz, 110v-50/60hz				
Transformer	Built-in 0-12v, continuous dimming				
Light source on the lamp	12v/15w halogen lamp				
Under light source	12v/15w halogen lamp				
Eyepiece holder	45° inclination, 360° horizontal rotatio 55-75mm pitch				

▼CHARACTERISTICS

The microscope is suitable for a wide range of scenarios. Use a fully coated eyepiece to increase light transmission. A pure copper objective ensures image stability. Adjustable binoculars for different distances.

Eyepiece	Standard configuration Working distance100mm		Additional large objective						
			0.5X Working distance165mm		1.5X Working distance45mm		2X Working distance30mm		
									Magnification
	10X/20	7X	28.6	3.5X	57.1	10.5X	19	14X	14.3
45X		4.4	22.5X	8.9	67.5X	3	90X	2.2	

PRODUCT INFORMATION



Suitable for various scenarios










LED light adjustment knob

Pure copper objective to ensure image stability



ORIGINAL PHOTO

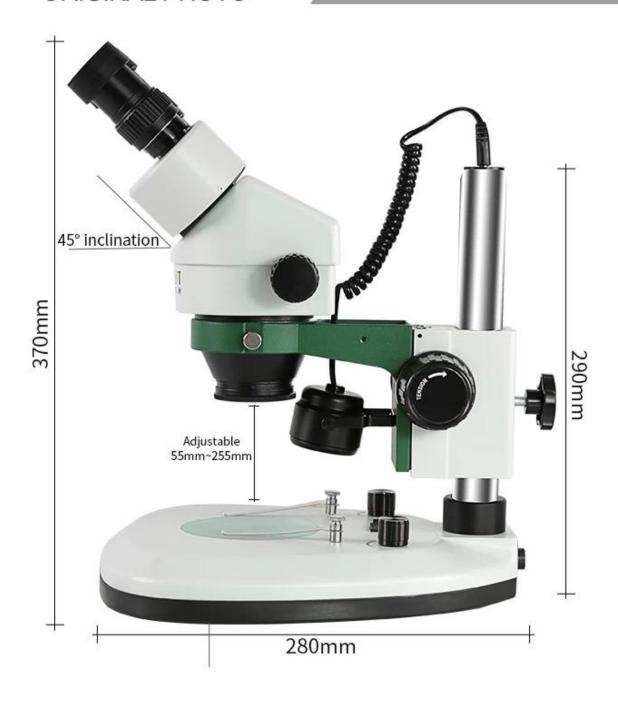























1.EYEPIECE PARTS 2. FOCUSING BRACKET

3.10/20X EYEPIECE X2 4. EYEPIECE COVER

5.THE RACK

6.INSTRUCTIONS

7.BLACK AND WHITE DOUBLE-SIDED MAT

8.THICK LARGE CARTON 9.THICKENED LARGE FOAM BOX