

STEREOMICROSCOPE

(STEREOMICROSCOPE) 3D 立體顯微鏡 : 3D 立體顯微鏡
放大倍率 45-7 : 3D 立體顯微鏡
放大倍率 10X / 22mm 16X / 15mm
放大倍率 4.5-0.7 : 3D 立體顯微鏡
3D 立體顯微鏡 3D 立體顯微鏡 3D 立體顯微鏡 3D 立體顯微鏡 3D 立體顯微鏡 : 3D 立體顯微鏡
3D 立體顯微鏡 Overviews





N.W	4.7kg
Objective lens	Continuous zoom 7x~45x
Eyepiece	Binocular wide angle WF10X
Power	220v-50hz, 110v-50/60hz
Transformer	Built-in 0-12v, continuous dimming
Light source on the lamp	12v/15w halogen lamp
Under light source	12v/15w halogen lamp
Eyepiece holder	45° inclination, 360° horizontal rotation 55-75mm pitch

▼ CHARACTERISTICS

The microscope is suitable for a wide range of scenarios. Use a fully coated eyepiece to increase light transmission. A pure copper objective ensures image stability. Adjustable binoculars for different distances.

Eyepiece	Standard configuration		Additional large objective					
			0.5X		1.5X		2X	
	Working distance	100mm	Working distance	165mm	Working distance	45mm	Working distance	30mm
	Magnification	Field of view	Magnification	Field of view	Magnification	Field of view	Magnification	Field of view
10X/20	7X	28.6	3.5X	57.1	10.5X	19	14X	14.3
	45X	4.4	22.5X	8.9	67.5X	3	90X	2.2



Fully coated eyepiece
for increased light transmission

Suitable for various scenarios



LED halogen lamp




LED light adjustment knob

Pure copper objective to ensure image stability





ORIGINAL PHOTO

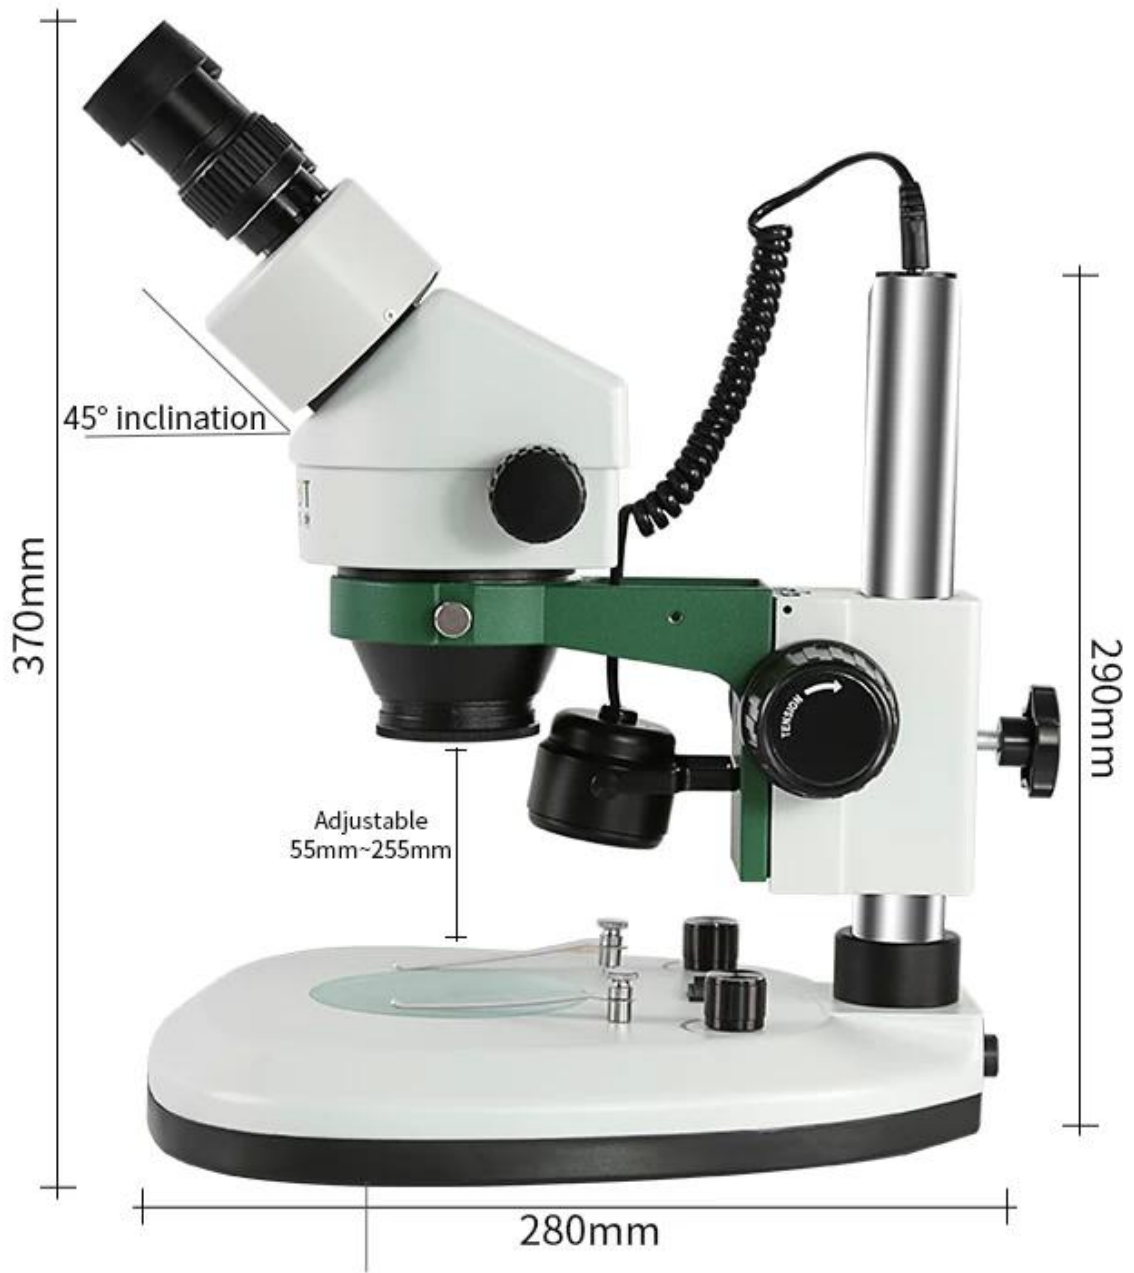



Adjustable binocular tube

SHIPPING LIST



- 1.EYEPIECE PARTS
2. FOCUSING BRACKET
- 3.10/20X EYEPIECE X2
4. EYEPIECE COVER
- 5.THE RACK
- 6.INSTRUCTIONS
- 7.BLACK AND WHITE DOUBLE-SIDED MAT
- 8.THICK LARGE CARTON
- 9.THICKENED LARGE FOAM BOX