

000000 000

00000 000000 000 0 00000 0000000 .1

000000 .2 PC 00000 00000

000000 0000 .3 USB 0 00000 0000 00 000000 000 000000 00 0000 .0000 00000

000 000 00 000000 .4 IC 5 000 000 00000 0000 000000V3.4A

5. 00000 00 00 00000 0 000000 0000 00000 000000 USB 3.4A 0 00000 0000 0000000 USB 00 00000

0000000 00 0000000 0000 000000000 0000000 000000 .6

000 00 00000 .7 CE 0 00000000

BRITISH STANDARD UNIVERSAL PLUG



Safety flame retardant material



integrated socket



silver alloy contact switch



independent safety door protection

Product Usage



MATERIAL	PC
RESOLUTION	375x65x65mm
POWER CORD	200cm
WEIGHT	400g
RATED POWER	2500W
RATED CURRENT	10A
RATED VOLTAGE	250V
USB OUTPUT	DC5V/3.4A/17W

▼ CHARACTERISTICS

This power strip is made of 750° safety flame retardant material. With integrated socket design, silver alloy switch can withstand 5000 times of pressure test. The socket independent safety door protection is safer to use.

5 steps safety protection

- 1.Lightning protection
- 2.short circuit protection
- 3.antistatic
- 4.overcurrent protection
- 5.overvoltage protection



Full controllable switch design



Hot line does not burn at 750°, 100° heat does not deform



PC material, Flame retardant

COMPATIBLE WITH VARIOUS ELECTRONIC DEVICES

Two usb smart fast charging, automatic identification compatible, keeping current at its best status.




High quality tin phosphor bronze
Safer thickened copper wire process





ORIGINAL PHOTO

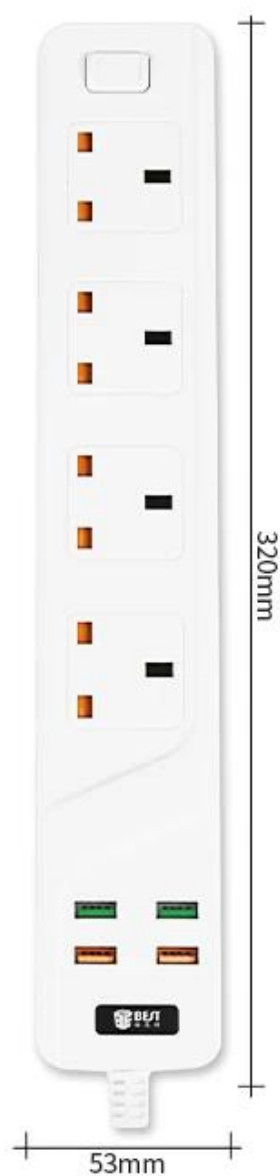



2M POWER CABLE, UK PLUG
