113-□□□B 16 □□□□ □□□□□□ □□□□ □□□□□□□□□□ □□□□□□ □□□□□ □□□□ □□□ □□□□□□ □□□ □□□□□□□□ □□□□□□ □□□ □□□

وصف المنتج:

.□□□□□ □□□□□ □□□□□□□□ □□□□□□□□ □□□□□□□□ □□□□□ □□□□□□□□ □□□ □□□□□ □□ □□□□□□□□ □□□ .1
□□□□□□□□□□ □□□□□ □□□□ □□□□□ □□□□□□ □□□□□□□ □□ □□□□□□ □□□□□ □□ □□□ 2 .2
□□□□□□ □□□□□□□□ □□□□ □□□□ □□□□□□□□□ □□□□ □□□□□□□ □□ □□□□□□ □□□□□ 5 .3
.□□□□□ □□□□ □□□□ □□□□□□ □□□ □ □□□□□□ □□□□□□□□ □□□□□□□ □□□□ □□□□□□ □□ □□□□□ □□□□□□ □□□□ □□ .4
.□□□□□ □□□ □□□ □□□□□□ □□□□ □□□□□□ □□□□□□ □□□□ □□□□□□□ □□□□□ .3
□□□□□□□ □□□ □□□□□ □□□□ □□□□ □□□□□□ □□□□□□□□ □□ □□□□□ □□□□□ □□□ .4
200 □□□ □□□□□ □□□□ --□□ .5mm.□□□□□ □□□ □□ □□□□□□□□ □□□□ □□ □□□□□ □□□□ □□□ □□ □
.□□□□□□□□ □□□□□□ □□□ □□ □□□□ □□□□ □□□□□□□ □□□□□ □□□□□ □□□□ .6

□□□□□□□□ □□□□□□□□ □□□□□□ □□□□□ □□□□□□□□ □□□□□□ □□□□□ □□□□□□□□□ □□□□ □□□□□□□ □□□ □□□ 16
.□□□□□ □□□□□□□
.□□□□□□□□□ □□ □ □□□□□□□ □□□□□□□ □□□□□□□ □□

مواصفات:

□□ :□□□ □□□□□□□-V □□□□ □□ + □□□□□
299 :□□□□□□ □□□mm * 155mm * 60mm
0.98 :□□□□□kg / □□□
□□□□ □□□ :□□□□
□□□□□□□ □□□□□
1 □□□□□pcs * 1041 □□□□□□□ □□□□□ □□□□□
107 * □□□ 1F □□□ □□□□□
5 □□□□□pcs * 8800C
1 □□□□□□□ □□□□□□□ □□□□□□ □□□□ 50 * □□□
1PCS * □□□□
□□□□ □□□ * □□□ 1
□□□□□□ □□□□ * □□□ 1
□□□□□ □□□□□ □□□□□□□ * □□□ 2
□□□□□□ □□□□□□□□□ * □□□ 2
□□□□□□ □□□□ □□□□□□ * □□□ 1

PRODUCT DISPLAY

PRODUCT SIZE

⚠ Warning

- This model is not insulated tools. Please use it when power off.

⚠ Attention

- To protect user safe, please use protective glasses.
- As the cut material will fly out, make sure no one beside you and no easy damaged things beside you, then begin working.
- This product is not a dedicated pressure equipment.
- When stored, please assure the blade at the closed state and can not be touched by children.
- Do not let the plier tip rub something.
- Please do not directly touch the blade part with hand.
- Do not use in cutting hard materials and steel wire, etc.
- Do not use the pliers above its cutting capability and coarse wire.

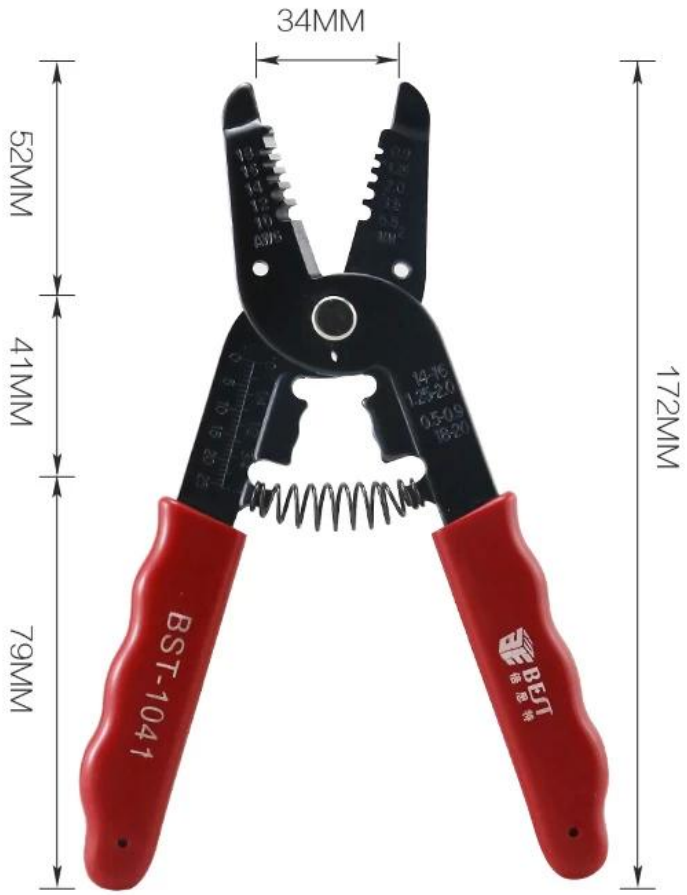

user manual:

- 1.Power socket should be used with a reliable grounding device. And before using, should check the voltage specification.
- 2.Soldering tip should be inserted into the bottom of the heating device.
- 3.For the first time used, the heating element maybe have some smoke which is normal phenomenon. After a few minites,the smoke willdisperse.
- 4.This product is prohibited used in wet environment.
- 5.In the working state, forbid dismount electric partes and other parts.
- 6.Please use natural Thermal Dissipated soldering support.

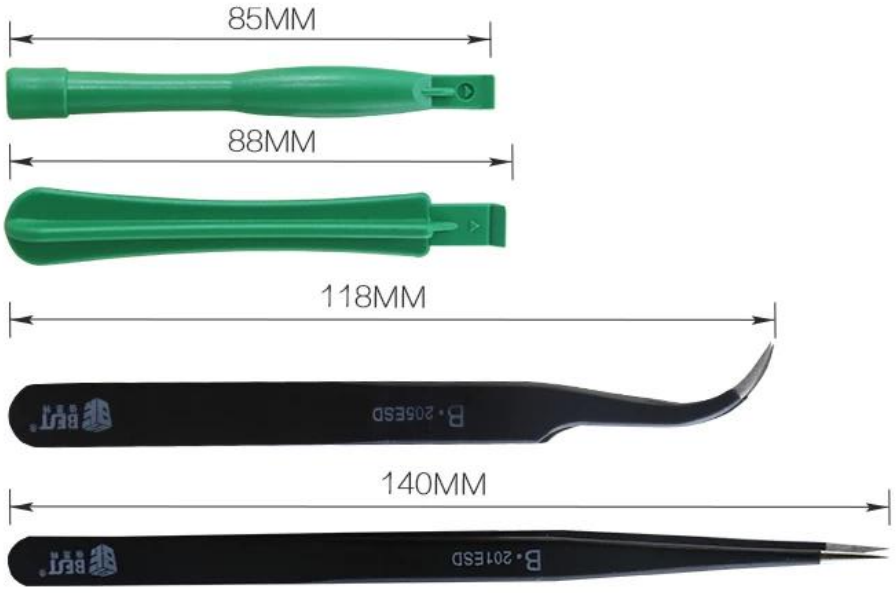
85MM
88MM
118MM
B·205ESD
140MM
B·201ESD

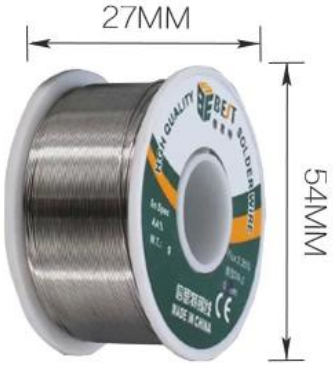
27MM
54MM

123MM

128MM

189MM

PRODUCT PHOTOGRAPH

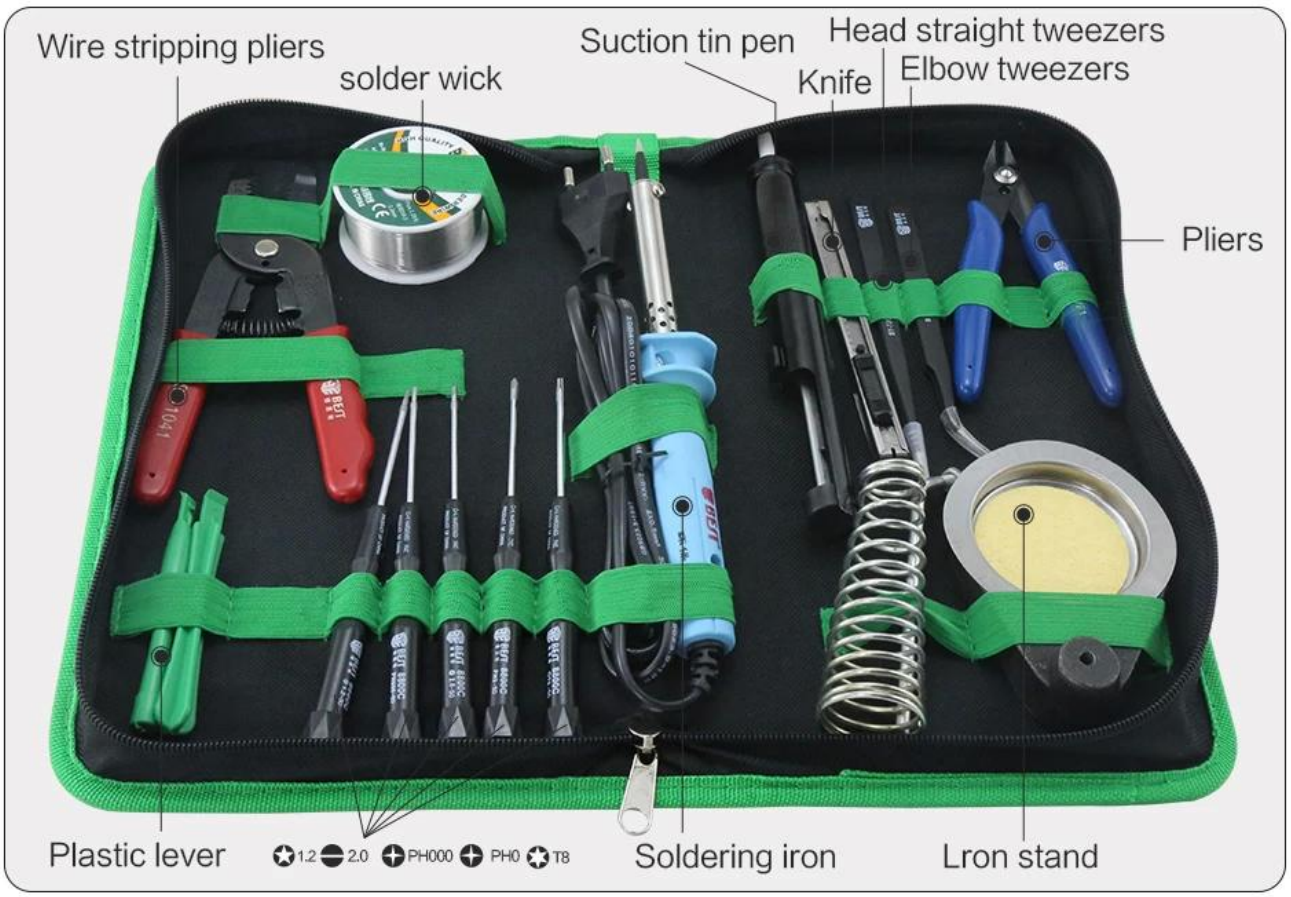

PRODUCT PACKAGING

WEIGHT:973.4G