





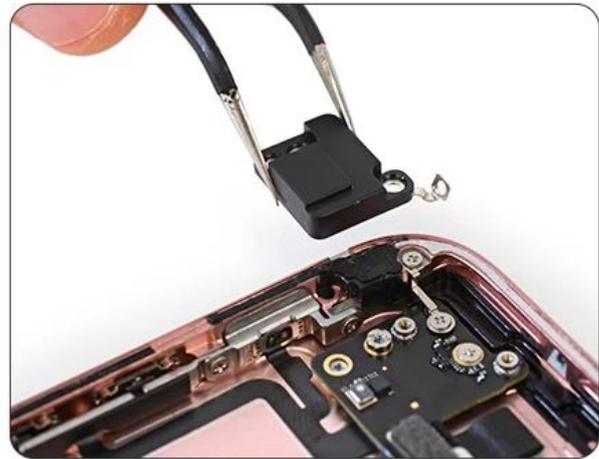

# PRODUCT DETAILS

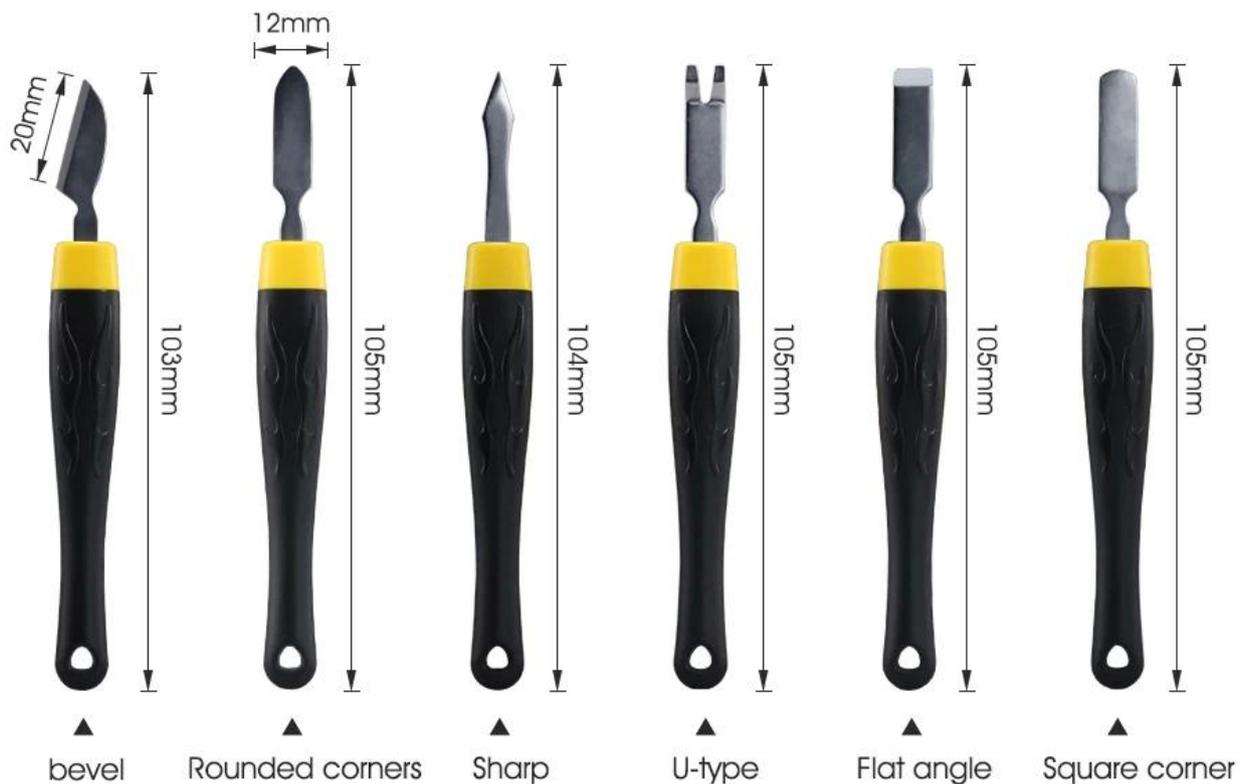

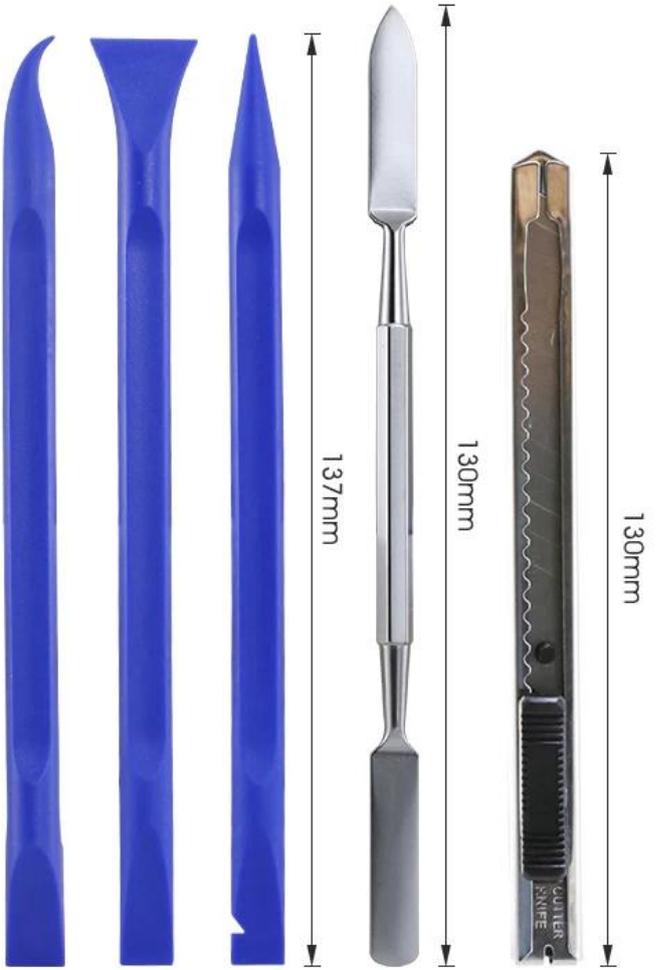

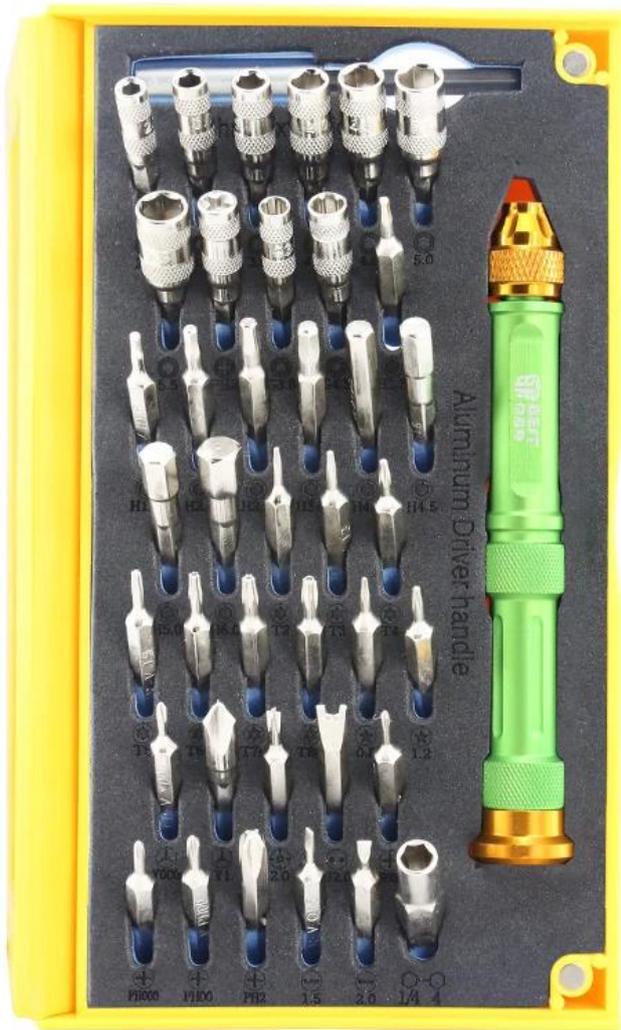

## BST-118-41PCS

Product Content:

○ 2.5    ○ 3.0    ○ 3.5    ○ 4.0    ○ 4.5    ○ 5.0    ○ 5.5

⊕ PH2    ● H1.3    ● H1.5    ● H2.0    ● H2.5    ● H3.0    ● H4.0


● H4.5    ● H5.0    ● H6.0    ☉ U2.0    ⊕ 2.0    ⊕ T1    ⊕ T2

⊕ T3    ⊕ T4    ⊕ T5    ⊕ T6H    ⊕ T7H    ⊕ T8H    ⊕ G3.8

⊕ G4.5    ⊕ PH0000    ⊕ PH000    ⊕ PH00    ⊕ PH2    ⊖ 1.5    ⊖ 2.0


⊕ 0.8    ⊕ 1.2    ⊕ Y000    ⊕ Y1    ⬡ 1/4 4

handle  
Material: aluminum alloy






Felxible extension rod    Bits:27mm



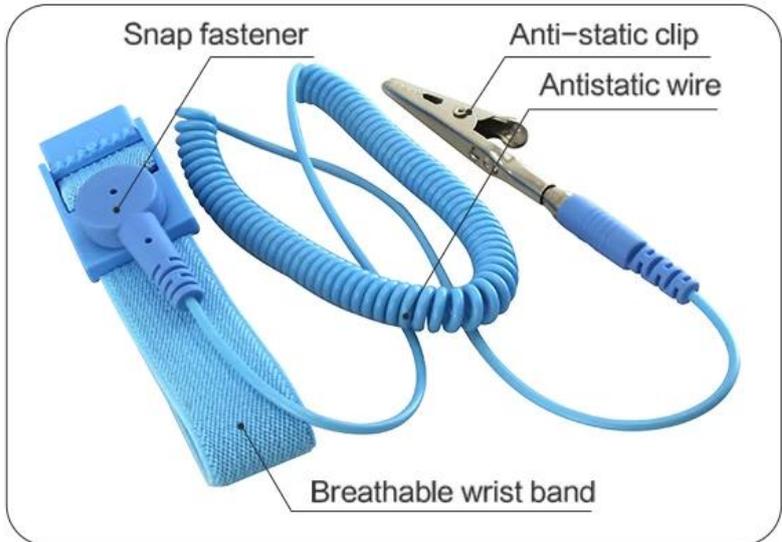


**Anti-static wrist**

- ★ Conducting electrostatic properties of wristbands and permanent
- ★ Slingshot line ends injection head with the PVC bei material

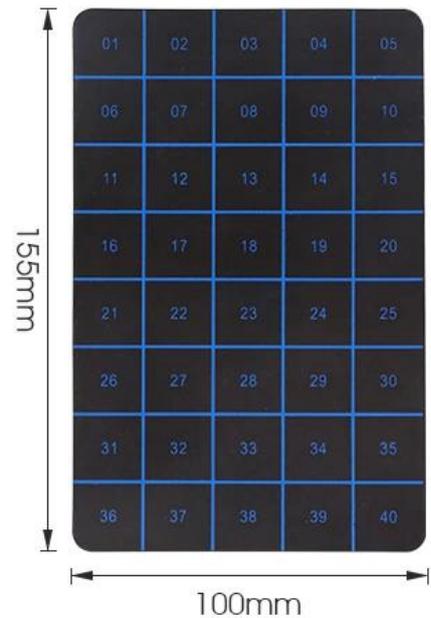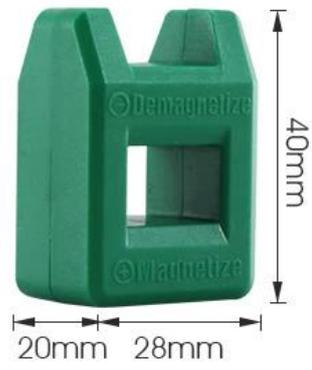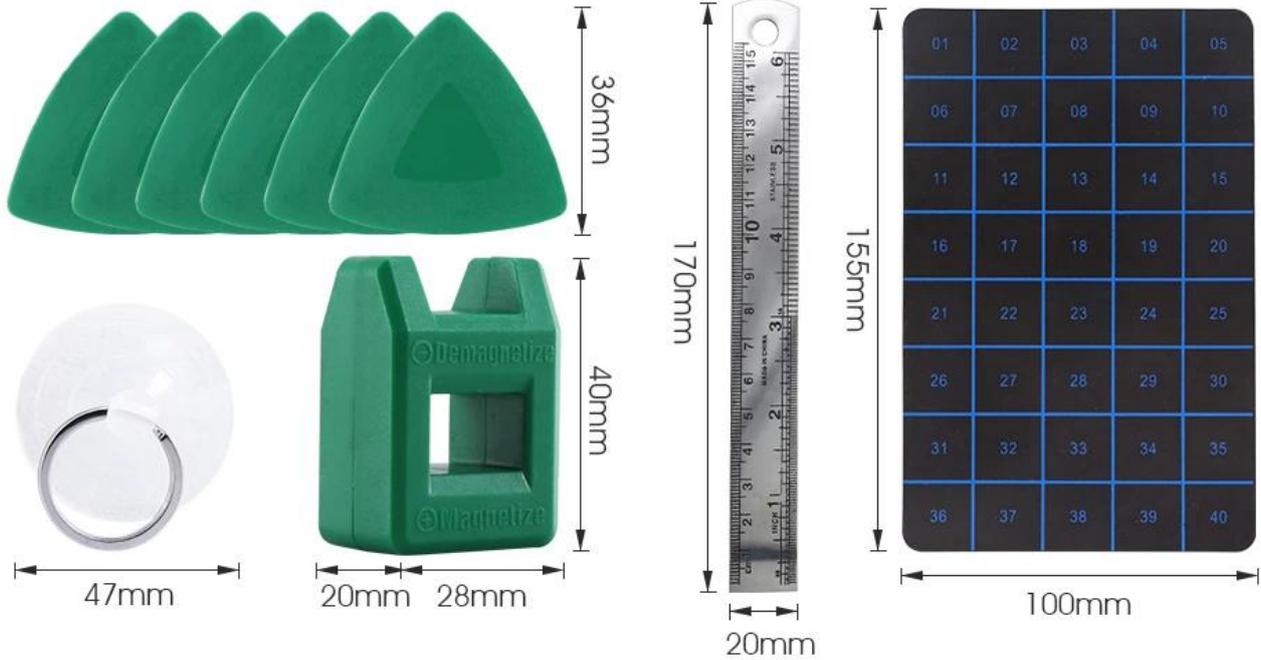

## PRODUCT PHOTOGRAPH

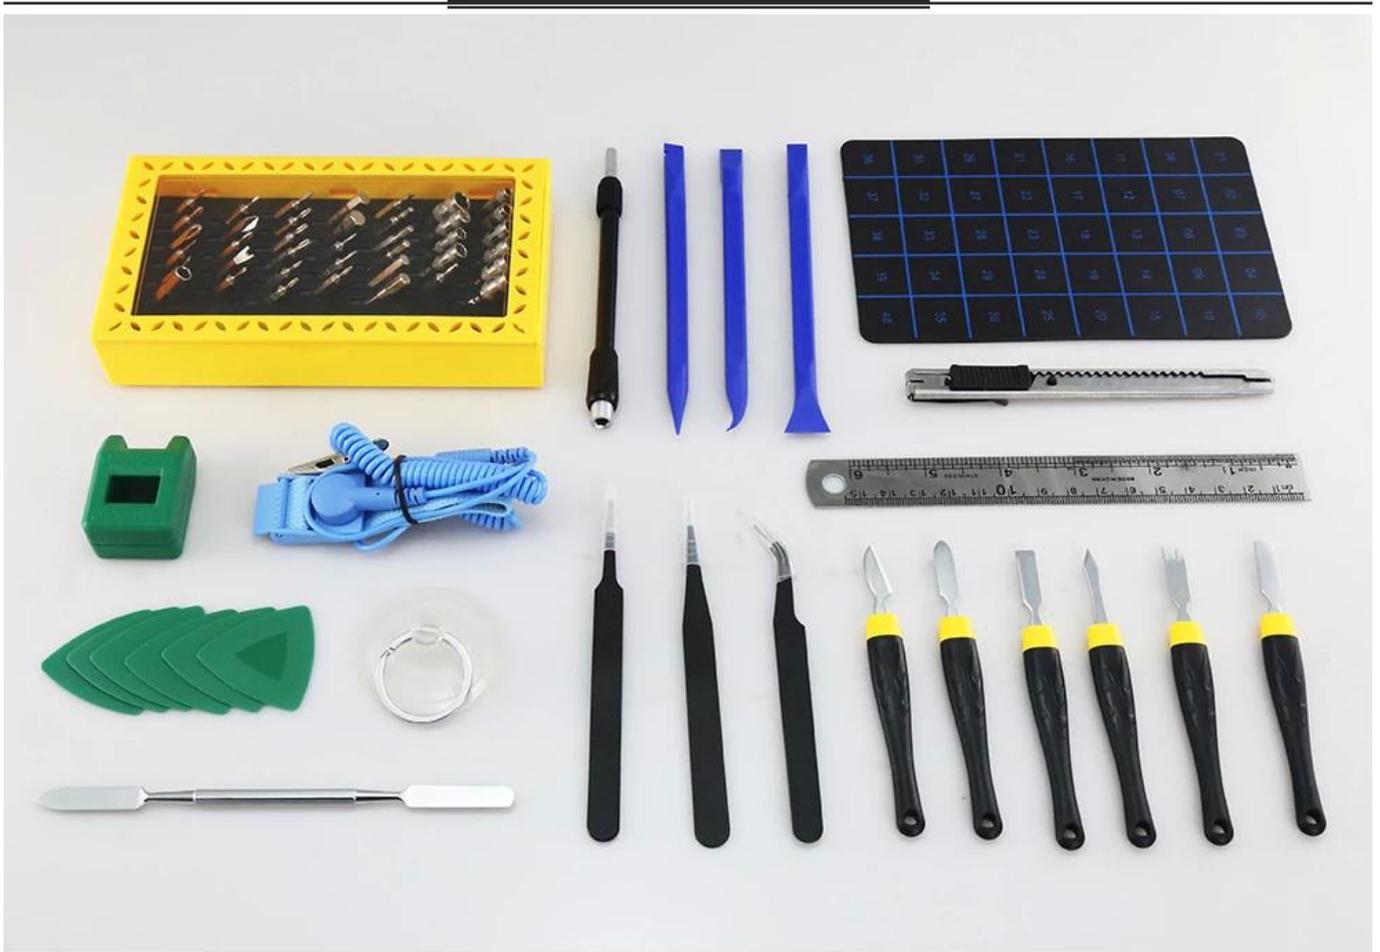

## PRODUCT PACKAGING

WEIGHT:910G



