ديسولديرينغ سلك اللحيم المزيل الأسلاك 1515-بستA

[illegible]

1. ضع ديسولديرينغ الفتيل على لحام لإزالتها، ثم دفع ساخنة لحام الحديد تلميح على ديسولديرينغ الفتيل . سيتم امتصاص اللحيم.
2. إزالة ديسولديرينغ الفتيل بعد تم امتصاص اللحيم .
3. قطع القسم المستخدم من الفتيل باستخدام نيبرس .
4. كرر الخطوات 1 2 و 3 إذا لم يتم إزالة اللحيم تماما . امتصاصية قد تختلف اعتمادا على نوع من لحام Sn63 نسبة و 60 في المئة (محتوى القصدير) لديها امتصاصية جيدة.

ميزات:

1. عالية الجودة سبائك النحاس الأسلاك من الدقة النسيج.

2. لإزالة القصدير في إكسيس لحام، مقاومة الأكسدة والتآكل.

3.Thermal الموصلية، وتأثير القصدير جيد جدا، والقصدير شفط نظيفة، وبقايا منخفضة.

4. مناسبة للدقة باستخدام الدوائر.

PRODUCT DISPLAY

PRODUCT SIZE

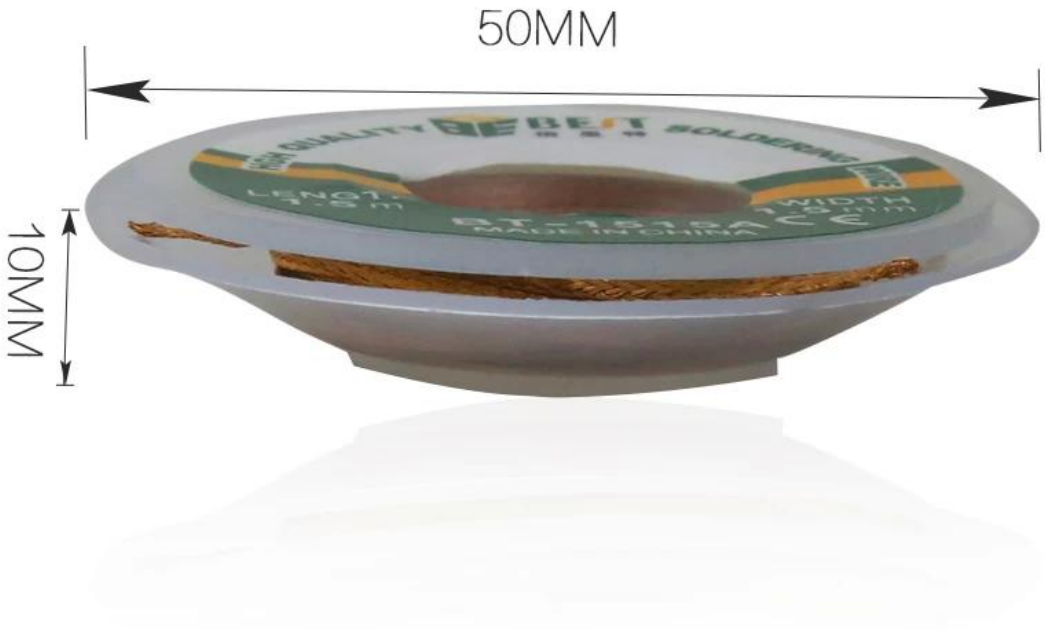

PRODUCT FEATURES

FRONT

BACK

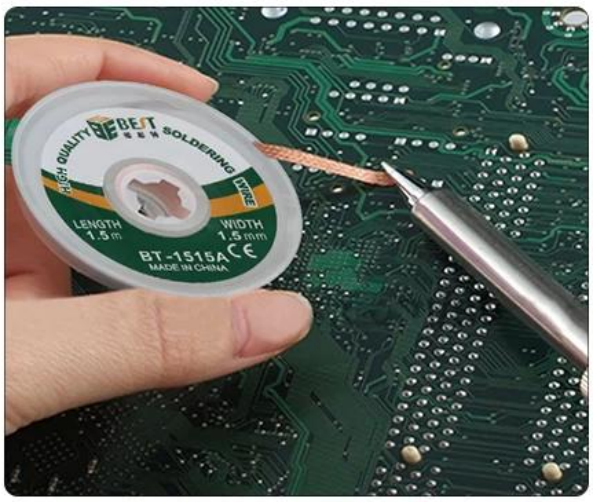

Features:

1.High quality alloy copper wire from the precision weaving.
2. For the removal of tin in the excess solder, resistance to oxidation and corrosion.
3.Thermal conductivity, tin effect is very good, tin suction clean. Low residue.
4. Suitable for precision circuit using.

PRODUCT PHOTOGRAPH

WELGHT:9G

LENGTH:1.5M
WIDTH:1.5MM

QUALITY BEST SOLDERING WIRE
HIGH
LENGTH 1.5m
WIDTH 1.5mm
BT-1515A
MADE IN CHINA
CE

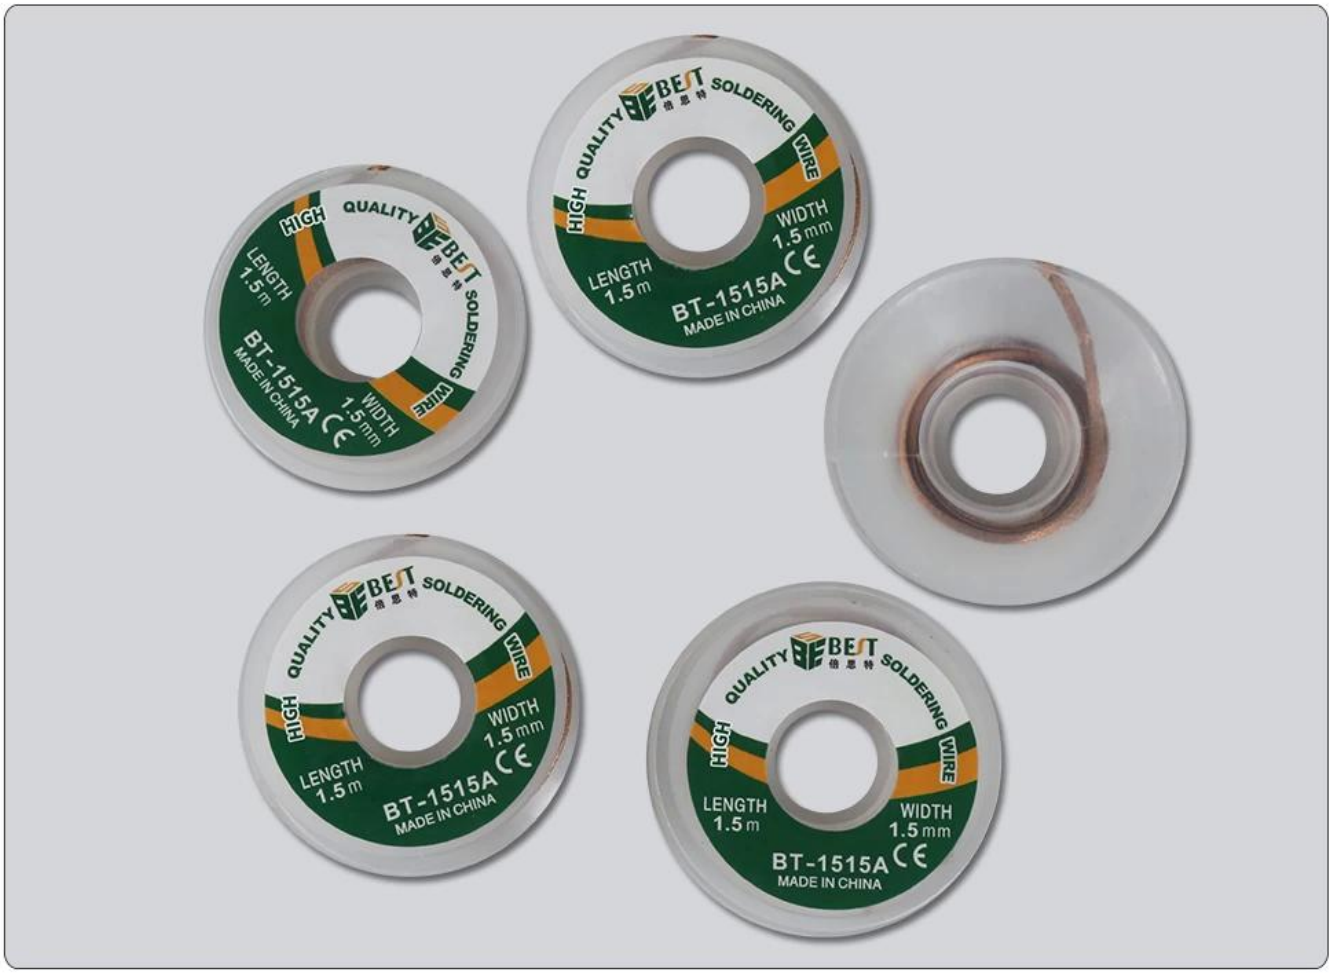
HIGH QUALITY BEST 倍思特 SOLDERING WIRE
LENGTH 1.5m
WIDTH 1.5mm
BT-1515A
MADE IN CHINA
CE