

1515-000A 000000 000000 0000 0000000000



1. 0000000000 00 00000 000000 0000 00000 000 00 000000000 0000 000 000000 000000000000 00 .0000000 0000000 00000 .0000000
- .0000000 0000000 00 000 0000000 00000000000000 000000 .2
- .000000 0000000000 0000000 00 0000000000 000000 0000 .3
- 00000 00 0000 0000 000000000 000000 00 0000000000 .000000 0000000 000000 0000 00 0000 3 2 1 000000000 0000 .4. Sn63 00000 0000000000 000000 (000000000 000000) 000000 00 60 0 00000.




1. 0000000 000000 00 000000000 00000000 0000000 0000000 000000.
2. 000000000 0000000000 00000000 000000 000000 00 0000000000 0000000.
3. **Thermal** 00000000 000000000 00000000 0000 00000000000 00000 0000 0000000000 00000000 00000000000.
4. 000000000 0000000000 0000000 00000000.

PRODUCT DISPLAY



PRODUCT SIZE

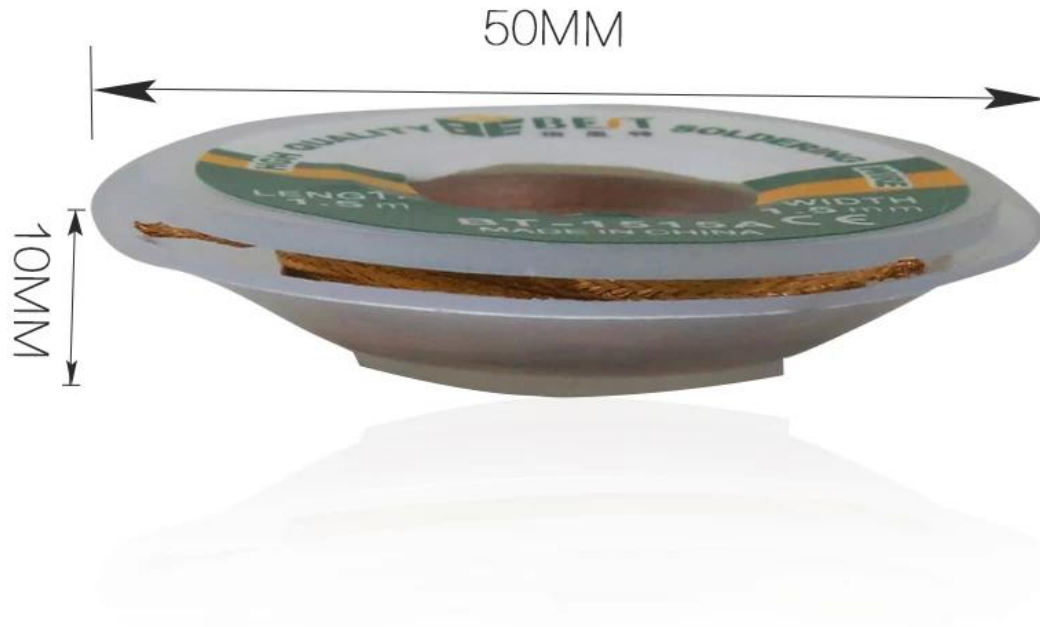

PRODUCT FEATURES



FRONT



BACK



Features:

- 1.High quality alloy copper wire from the precision weaving.
2. For the removal of tin in the excess solder, resistance to oxidation and corrosion.
- 3.Thermal conductivity, tin effect is very good, tin suction clean. Low residue.
4. Suitable for precision circuit using.

PRODUCT PHOTOGRAPH

WELGHT:9G



LENGTH:1.5M  
WIDTH:1.5MM



