BST-2515A □□□□ □□□□□□ □□□□ **desoldering** □□□□□□□ □□□□ □□□□ □□□□□ □□□ □□□□□□

□□□□□□ □□□

□□□□□□□ □□□□□□□□ □□□□□□□ □ 100 :□□□□□

1.5 :□□□□□MM

2.0 :□□□□□MM

□□□□□ □□□□□□ □□□□ □□ □□□□□□□ pityity .□□□□□□ □□□□□□□□

.□□□□□□ □□□□□ □□□□□ □□□□□ □□□□□□□□ □□□□□□ □□□□□ □□□□ □□□□ □□□□□ □□□ □□□□□ □□□□□ □□□

□□ □□□□□□ □□□□□□□ □□□□□□ □□□□□ □□ □ □□□□ □□□□□□ □□□□□□□ □□□ □□□□□□ □□□□ □□ :□□□□□□□□□

□□□□□□ □□□□□□ □□□□ □□□ □□□□□ □□□□□ □□□□□ □□ □□□□□ □ □□□□□□□ □□ □□□□□□□□ □□□□□ □□□□□□

.□□□□□□ □□□□□□ □□

:□□□□□

1.High .□□□□□□ □□□□□ □□ □□□□□ □□□□□□□□ □□□□□□□ □□□□

□□□□ □□ □□□□□□□ □□□□□□ .2 exceess □ .□□□□□□□ □□□□□□□ □□□□□□□

.□□□□□□ □□□□□ □ □□□□□ □□□ □□□□□□□ □ □□□ □□□ □□ □□□□□□□ □□□□□ □ □□□□□□□□ □□□□□□□□ .3

□□□□□□□□ □□□□□ □□□□ □□□□□□ .4.

PRODUCT DISPLAY

PRODUCT SIZE

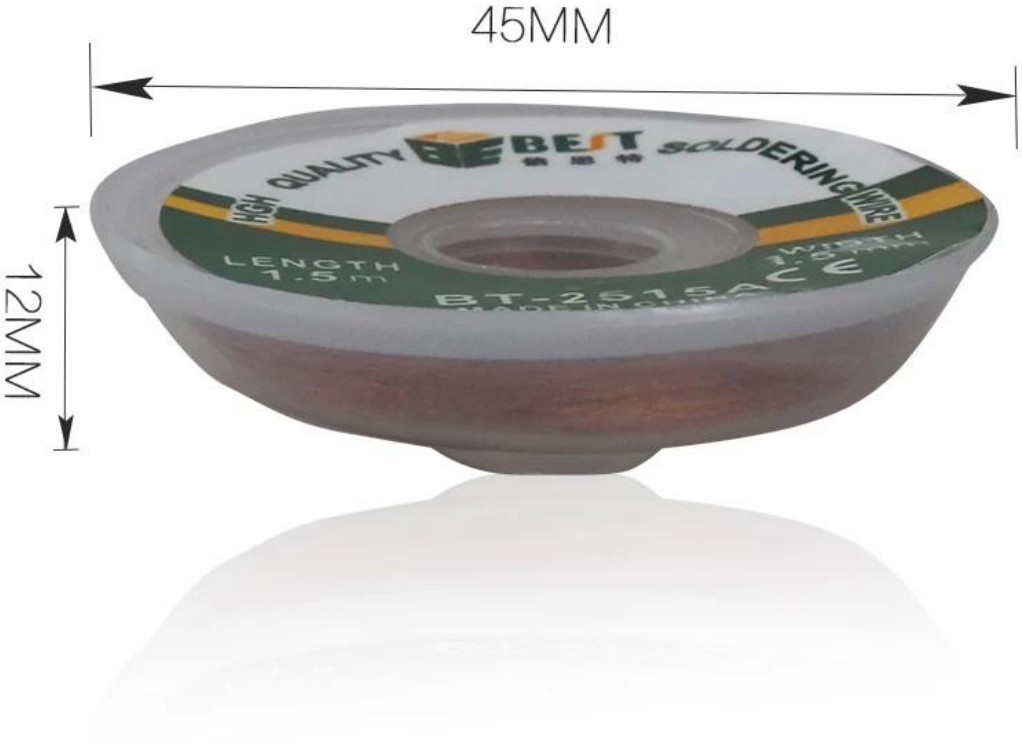

PRODUCT FEATURES

FRONT

BACK

Features:

1.High quality alloy copper wire from the precision weaving.
2. For the removal of tin in the excess solder, resistance to oxidation and corrosion.
3.Thermal conductivity, tin effect is very good, tin suction clean. Low residue.
4. Suitable for precision circuit using.

PRODUCT PHOTOGRAPH

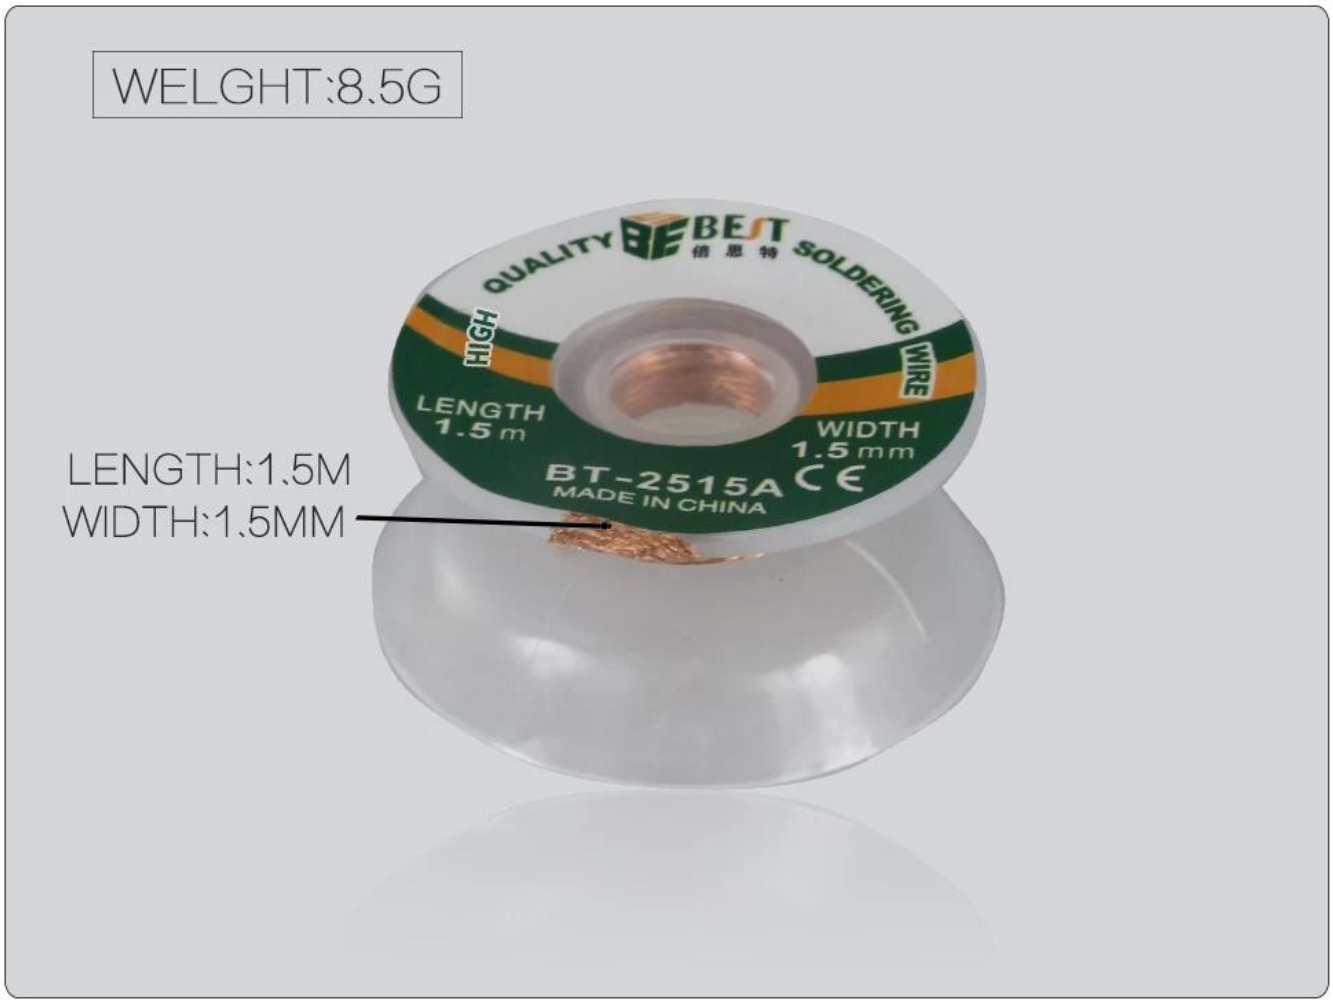

QUALITY
BEST
倍思特
SOLDERING
WIRE
HIGH
LENGTH
1.5m
WIDTH
1.5mm
BT-2515A
MADE IN CHINA
CE
QUALITY
BEST
倍思特
SOLDERING
WIRE
HIGH
LENGTH
1.5m
WIDTH
2.5mm
BT-2515A
MADE IN CHINA
CE
QUALITY
BEST
倍思特
SOLDERING
WIRE
HIGH
LENGTH
1.5m
WIDTH
1.5mm
BT-2515A
MADE IN CHINA
CE
QUALITY
BEST
倍思特
SOLDERING
WIRE
HIGH
LENGTH
1.5m
WIDTH
1.5mm
BT-2515A
MADE IN CHINA
CE
QUALITY
BEST
倍思特
SOLDERING
WIRE
HIGH
LENGTH
1.5m
WIDTH
1.5mm
BT-2515A
CE

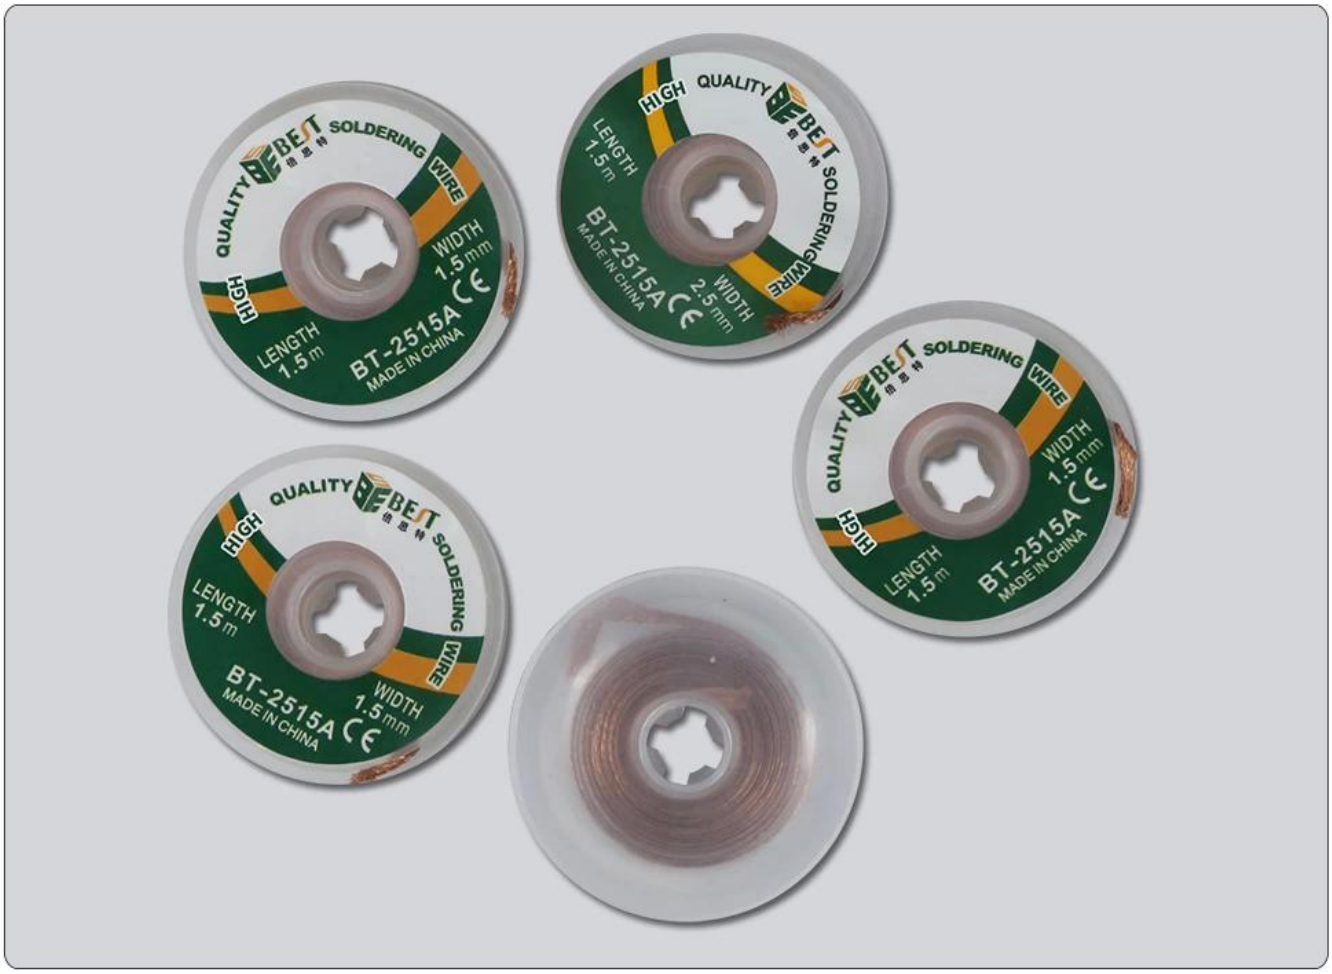
QUALITY
BEST
SOLDERING
WIRE
HIGH
WIDTH
1.5mm
LENGTH
1.5m
BT-2515A
MADE IN CHINA
HIGH QUALITY
BEST
SOLDERING
WIRE
LENGTH
1.5m
BT-2515A
MADE IN CHINA
WIDTH
2.5mm
QUALITY
BEST
SOLDERING
WIRE
HIGH
WIDTH
1.5mm
LENGTH
1.5m
BT-2515A
MADE IN CHINA
QUALITY
BEST
SOLDERING
WIRE
HIGH
LENGTH
1.5m
BT-2515A
MADE IN CHINA
WIDTH
1.5mm