3015-□□□A □□□□□ □□□ □□□□ □□□□ □□□□□□ □□□□□□□ □□□□□ □□□□□□ □□□□□□ □□□□□ □□□□□□□□□□□□ □□□□□□□ □□□□□ □□ □□□□ □□ □□□□

□□□□□□ □□□

□□□ □□□□□ □□□□□□ □□□□ □□□□□ □□□ □□ □□□□□□□□□□ □□□□ □□□ □□□□□□ □□□□□□□□□□□□ □□ .1
.□□□□□□ □□□□□□ □□□□ .□□□□□□ □□□□□□□□□□□□
.□□□□□□ □□□□□□ □□ □□□ □□□□□□ □□□□□□□□□□□□ □□□□□ .2
.□□□□□ □□□□□□□□ □□□□□□ □□ □□□□□□□□ □□□□□ □□□ .3
□□□ □□□ □□□□□□□ □□□□□ □□ □□□□□□□□ .□□□□□ □□□□□□ □□□□□ □□□ □□ □□□ 3 □ 2 1 □□□□□□□ □□□ .4
□□□□ □□. Sn63 .□□□□ □□□□□□□□ □□□□□ (□□□□□□□ □□□□□) □□□□□ □□ 60 □ □□□□

:□□□□□

.□□□□□□ □□□□□ □□ □□□□□□□ □□□□□□ □□□□□ □□□□□□ □□□□□ .1
.□□□□□□□ □□□□□□□ □□□□□□ □□□□□ □□□□□ □□ □□□□□□□ □□□□□□ .2
3.Thermal .□□□□□□ □□□□□□ □□□□□□ □□□ □□□□□□□□ □□□□ □□□ □□□□□□□ □□□□□□ □□□□□□□□□
□□□□□□□ □□□□□□□□ □□□□□ □□□□□□ .4.

PRODUCT DISPLAY

PRODUCT SIZE

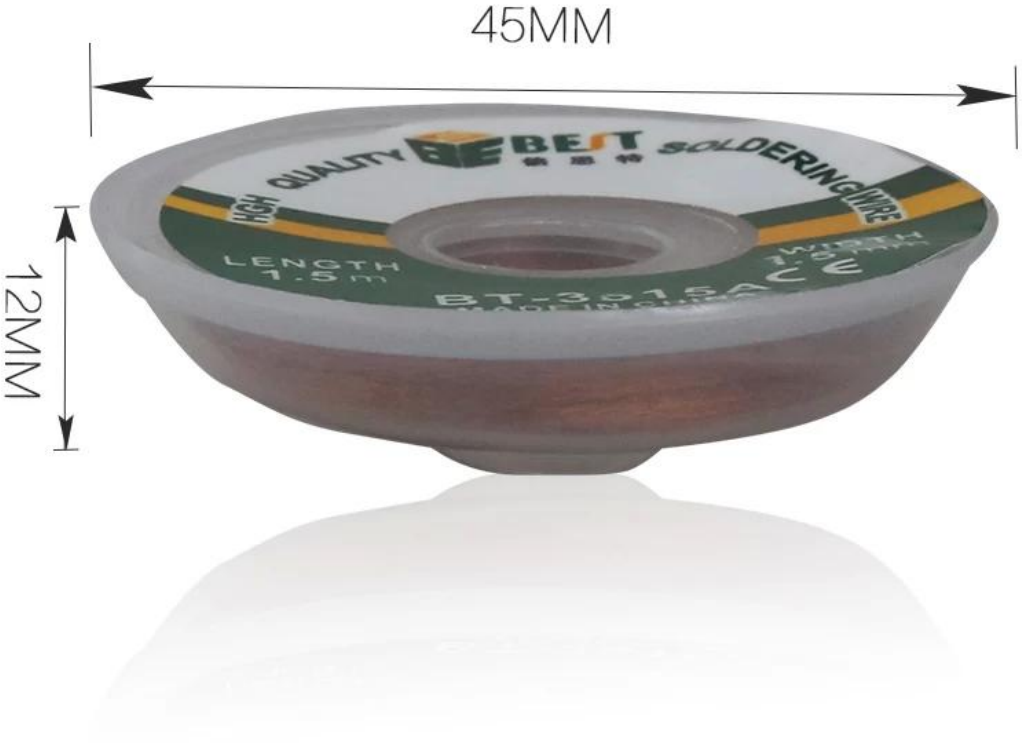

PRODUCT FEATURES

FRONT

BACK

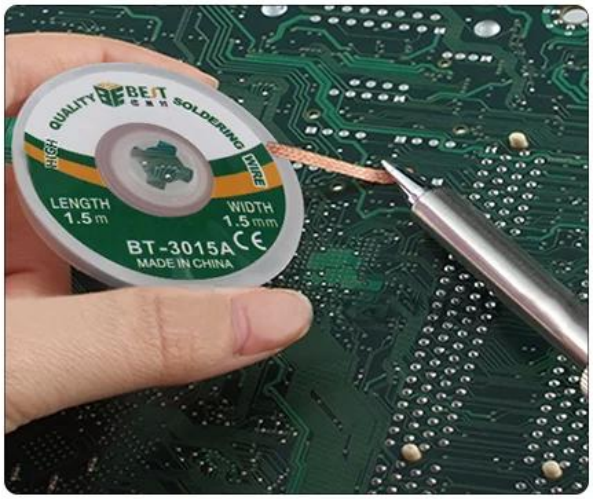

Features:

1.High quality alloy copper wire from the precision weaving.
2. For the removal of tin in the excess solder, resistance to oxidation and corrosion.
3.Thermal conductivity, tin effect is very good, tin suction clean. Low residue.
4. Suitable for precision circuit using.

PRODUCT PHOTOGRAPH

QUALITY
BEST
倍思特
SOLDERING
WIRE
HIGH
WIDTH
1.5mm
LENGTH
1.5m
BT-3015A
MADE IN CHINA
CE

QUALITY
BEST
SOLDERING
WIRE
HIGH
LENGTH
1.5 m
WIDTH
1.5 mm
BT-3015A
MADE IN CHINA
CE