□□□□□ □□ □□□□□□□□□□□□ □□□□□□ □□□□□ □□□□ □□□□ □□□ □□□ □□□ □□□□□ □□□ □□□□□□□□□□□□

□□□□□□ □□□

1. □□□ □□□□□ □□□□□□ □□□□ □□□□□ □□□ □□ □□□□□□□□□ □□□□ □□□ □□□□□□ □□□□□□□□□□□ □□ □□□□□□ □□□□□□ □□□□ .□□□□□□ □□□□□□□□□□□.

2. .□□□□□□ □□□□□□ □□ □□□ □□□□□□ □□□□□□□□□□□ □□□□□

.□□□□□ □□□□□□□□ □□□□□□ □□ □□□□□□□□ □□□□□ □□□ **.3**

□□□ □□□□□□□ □□□□□ □□ □□□□□□□□ .□□□□□ □□□□□□ □□□□□ □□□ □□ □□□ **3 □ 2 1** □□□□□□□ □□□ **.4**

□□□□ □□ □□□. **Sn63** □□□□ □□□□□□□□ □□□□□ **(**□□□□□□□ □□□□□**)** □□□□□ □□ **60 □** □□□□.

:□□□□□

.□□□□□□ □□□□□ □□ □□□□□□□ □□□□□□ □□□□□ □□□□□□ □□□□□ **.1**

.□□□□□□□ □□□□□□□ □□□□□□ □□□□□ □□□□□ □□ □□□□□□□ □□□□□□ **.2**

3.Thermal .□□□□□□ □□□□□□ □□□□□□ □□□ □□□□□□□□ □□□□ □□□ □□□□□□□ □□□□□□ □□□□□□□□□ □□□□□□□ □□□□□□□□ □□□□□ □□□□□□ **.4.**

PRODUCT DISPLAY

PRODUCT SIZE

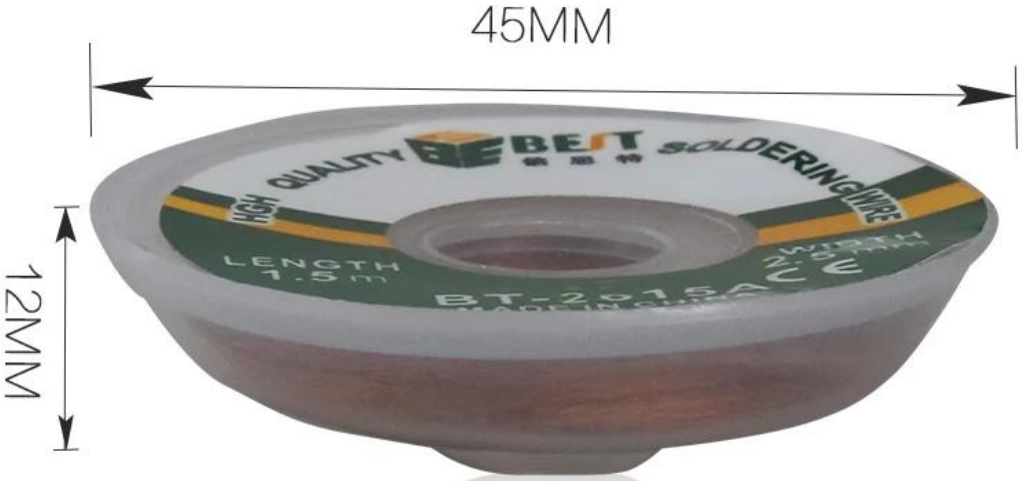

PRODUCT FEATURES

FRONT

BACK

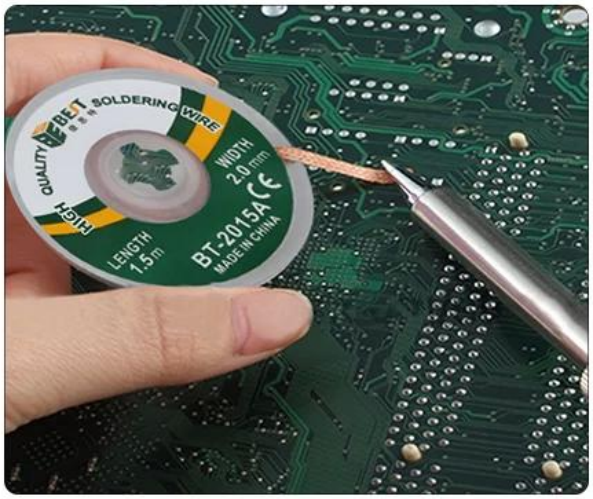

Features:

1.High quality alloy copper wire from the precision weaving.
2. For the removal of tin in the excess solder, resistance to oxidation and corrosion.
3.Thermal conductivity, tin effect is very good, tin suction clean. Low residue.
4. Suitable for precision circuit using.

PRODUCT PHOTOGRAPH

QUALITY
BEBEST
SOLDERING WIRE
HIGH
LENGTH 1.5m
WIDTH 2.0 mm
BT-2015A
MADE IN CHINA

QUALITY
BEBEST
希思特
SOLDERING WIRE
HIGH
WIDTH
2.0 mm
LENGTH
1.5 m
BT-2015A
MADE IN CHINA