

□□□□□□□□ □□□ □□□□□ □□□□ :□□□□□□

□□ □□ □□ :□□□□□□□□-J4

□□□□ 4.5 ~ □□□□ 4.2 :□□□□□□

□□ □□□□□ :□□□□□□□ □□□□□

□□□ □□□□ 105*1.5*17 :□□□□□□□ □□□

□□□ □□□□ 115*20*35 :□□□□□□□ □□□


□□□□ 6.0:□□

□□□□ 12.5 :□□□□□□□□

BATTERY ACTIVATION BOARD FOR IP5-16



BST-J4

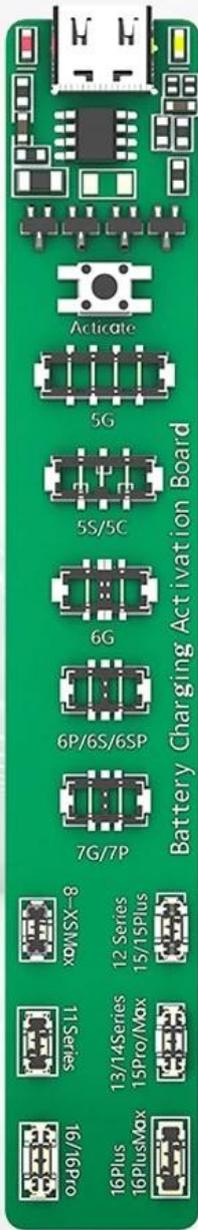


One Click Quick Activation



Plug on the battery and activate it quickly with just one click


Activation Button

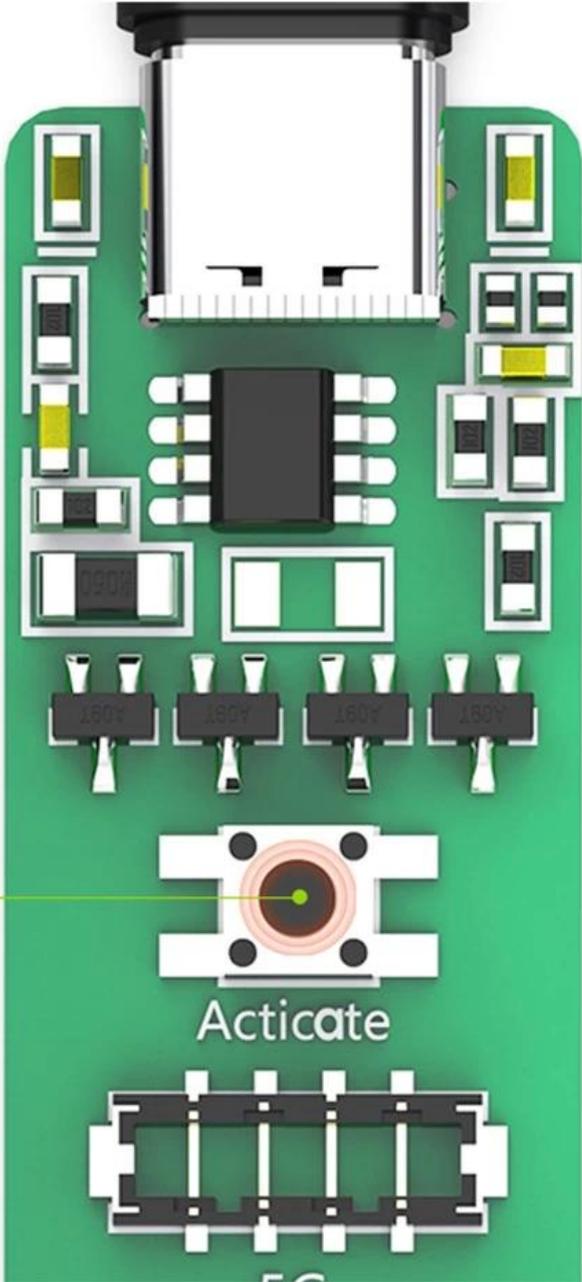

Overload protection




4.2V regulated output, overload high voltage protection, multiple protection for mobile phone batteries

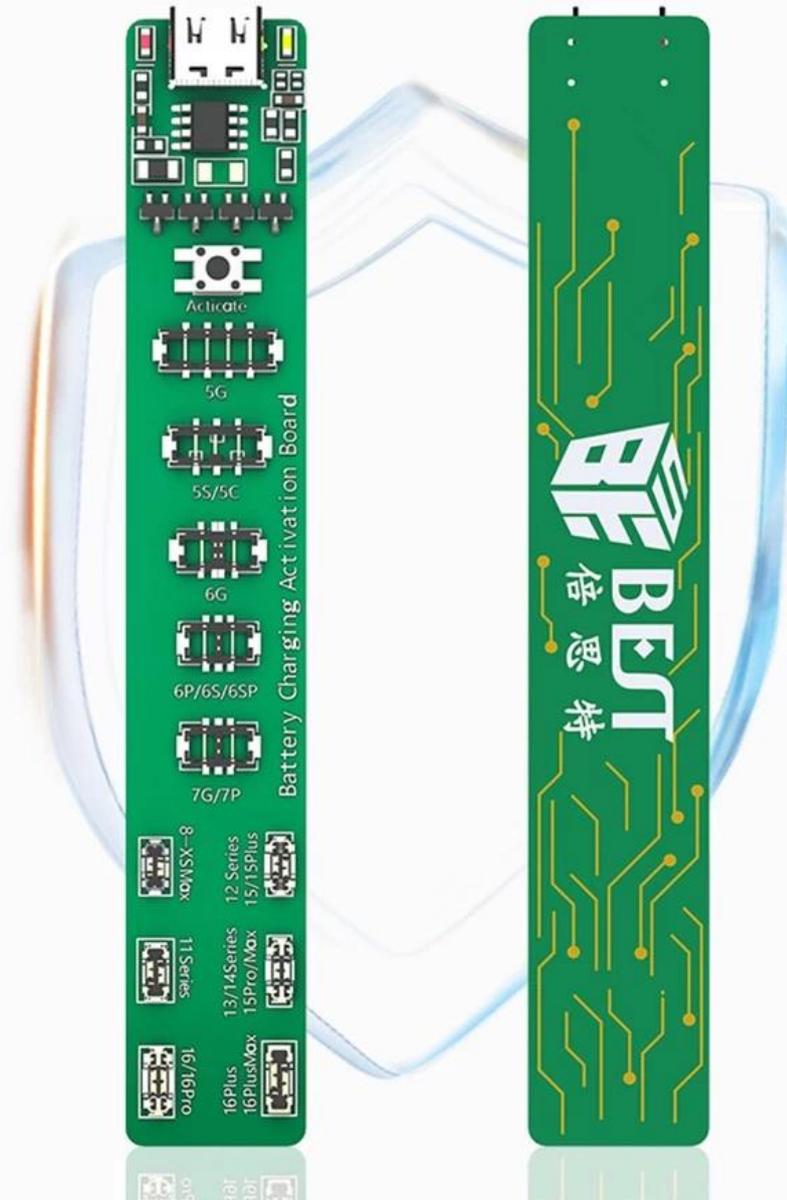

Automatic power off




After the battery is fully charged, it will automatically power off and the red indicator light will turn off

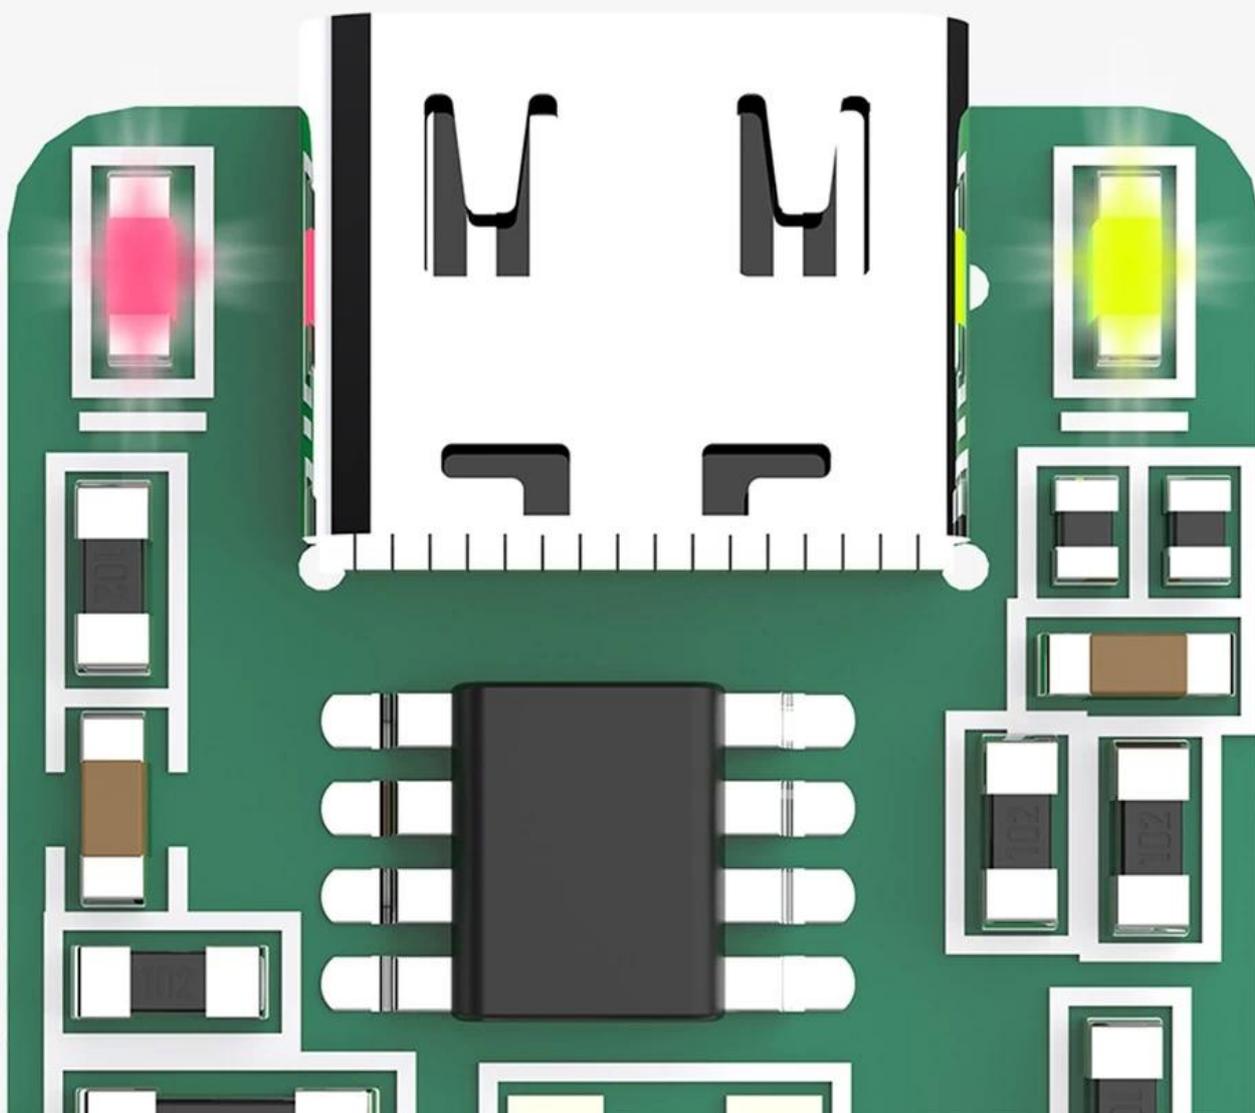

PD Fast Charging



This battery activation board is equipped with a PD chip to achieve PD fast charging

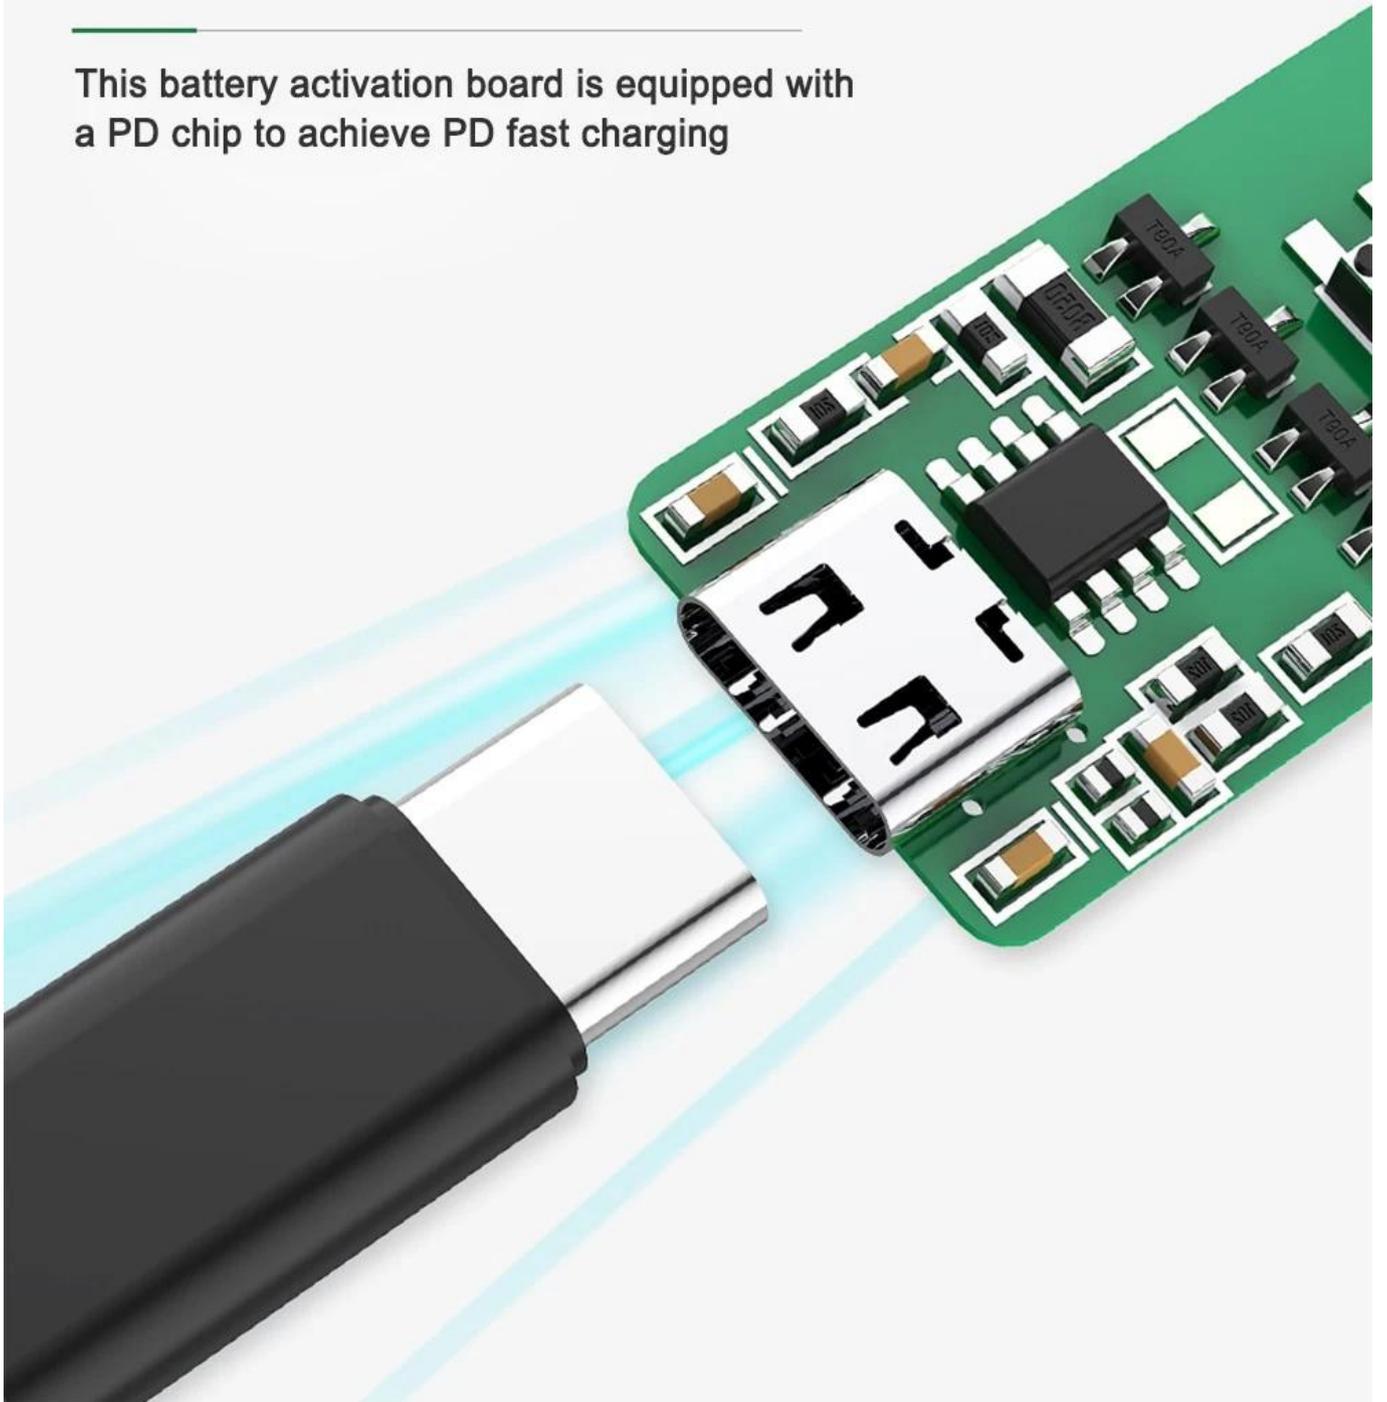

Compatible Models



Supports 5A input/output charging, the board will automatically cut off power supply when overload voltage is applied

Suitable for iP5-16


5G/5S/6/6P/7/7P/8/8P/X/XS/
XS MAX/XR/11/11PRO/11 PRO MAX/
12/12MINI/12 PRO/12 PRO MAX/13/
13MINI/13 PRO/13 PRO MAX/14/
14PLUS/14 PRO/14 PRO MAX/15/
15PLUS/15 PRO/15 PRO MAX/
16/16PLUS/16PRO/16 PRO MAX




Automatic recognition Battery anode/cathode



Built in automatic recognition circuit, the board can intelligently adjust the output voltage and current when the battery is positively or negatively connected to the interface, ensuring safety and accuracy during charging

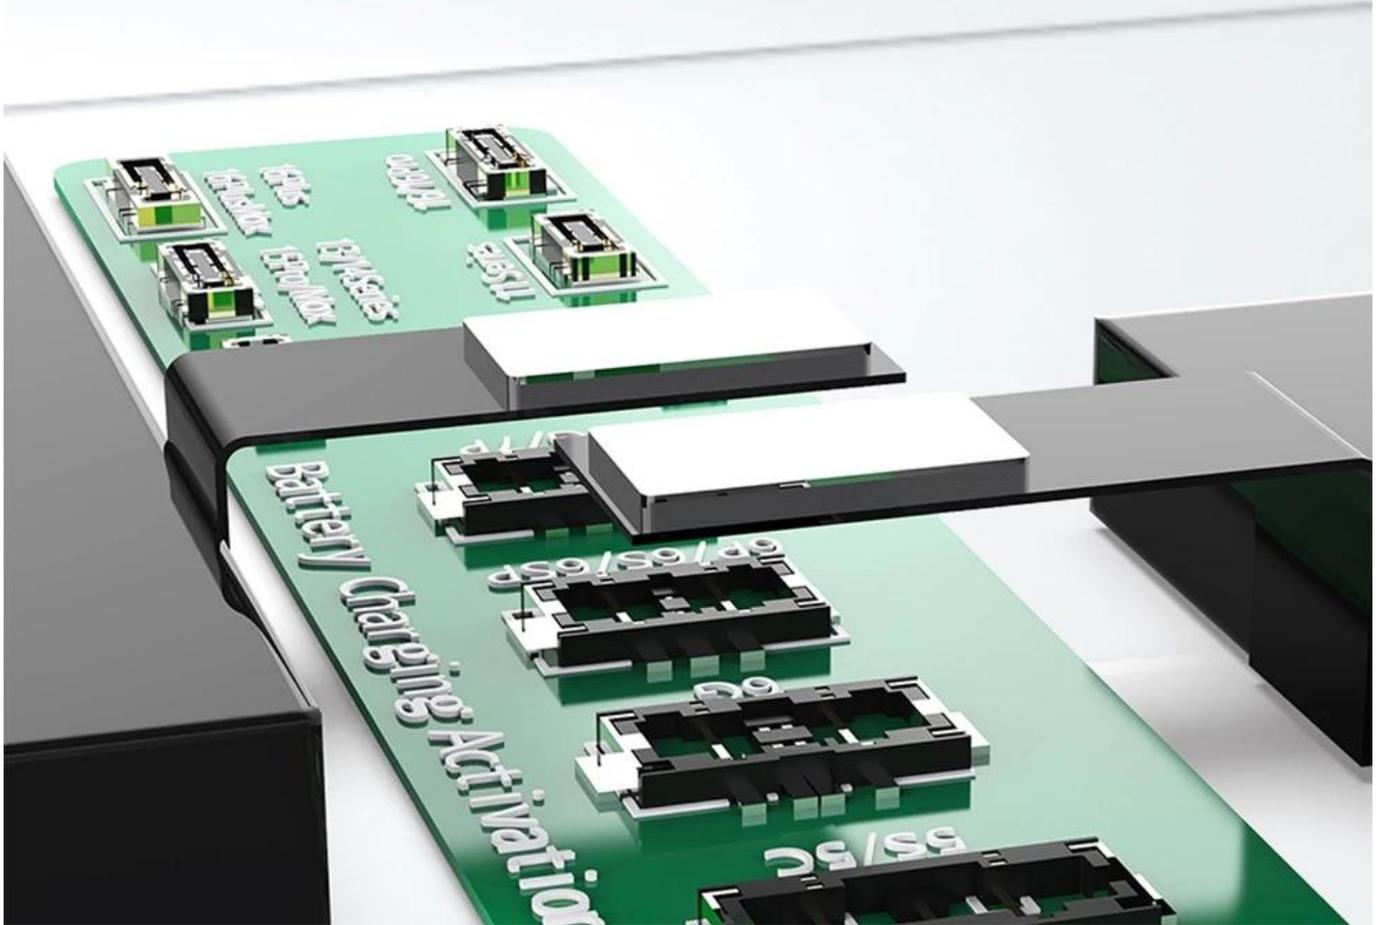

Parameter

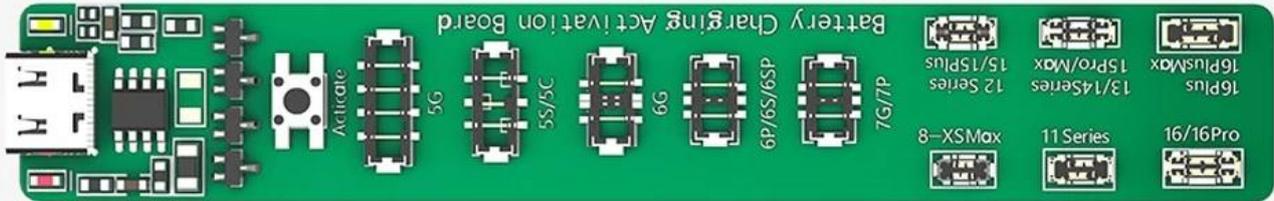

Name: Battery Charging Activation Board **Model:** BST-J4

Voltage: 4.2V~4.5V **Power interface:** Type-C

Board Size: 17*1.5*105mm **Package Size:** 35*20*115mm

N. W. : 6.0g **G. W. :** 12.5g

