

ମୁଖ୍ୟମାତ୍ର ପରିପାଳନ କୌଣସି

1. ପରିପାଳନ 2 ମଧ୍ୟ ଦେଇଲୁ ଏହା କି ପରିପାଳନ କିମ୍ବା ପରିପାଳନ କିମ୍ବା ପରିପାଳନ କିମ୍ବା :ମୁଖ୍ୟମାତ୍ର ପରିପାଳନ.
2. ପରିପାଳନ 550 ମିନ୍ ଏହା କିମ୍ବା ପରିପାଳନ କିମ୍ବା :ମୁଖ୍ୟମାତ୍ର ପରିପାଳନ କିମ୍ବା.
3. ପରିପାଳନ ଏହା କିମ୍ବା ପରିପାଳନ କିମ୍ବା :ମୁଖ୍ୟମାତ୍ର ପରିପାଳନ.
4. ପରିପାଳନ ଏହା କିମ୍ବା ପରିପାଳନ କିମ୍ବା ପରିପାଳନ କିମ୍ବା ପରିପାଳନ କିମ୍ବା :ମୁଖ୍ୟମାତ୍ର ପରିପାଳନ କିମ୍ବା ପରିପାଳନ କିମ୍ବା).
5. ପରିପାଳନ ଏହା କିମ୍ବା ପରିପାଳନ କିମ୍ବା ପରିପାଳନ କିମ୍ବା ପରିପାଳନ କିମ୍ବା 1 ମିନ୍ ଏହା :ମୁଖ୍ୟମାତ୍ର ପରିପାଳନ.
6. ପରିପାଳନ ଏହା କିମ୍ବା ପରିପାଳନ କିମ୍ବା ପରିପାଳନ କିମ୍ବା :ମୁଖ୍ୟମାତ୍ର ପରିପାଳନ.
7. ଏହା :ମୁଖ୍ୟମାତ୍ର ପରିପାଳନ କିମ୍ବା ପରିପାଳନ.

ମୁଖ୍ୟମାତ୍ର ପରିପାଳନ କିମ୍ବା

ମୁଖ୍ୟମାତ୍ର ଏହା .(ମୁଖ୍ୟମାତ୍ର ଏହା ଏହା ଏହା ଏହା ଏହା ଏହା ଏହା ଏହା) ଏହା ଏହା ଏହା ଏହା :

- 1.ମୁଖ୍ୟମାତ୍ର ଏହା ଏହା ଏହା
- 2.ମୁଖ୍ୟମାତ୍ର ଏହା ଏହା ଏହା
- 3.ମୁଖ୍ୟମାତ୍ର/ମୁଖ୍ୟମାତ୍ର ଏହା
- 4.ମୁଖ୍ୟମାତ୍ର ଏହା ଏହା ଏହା ଏହା ଏହା ଏହା ଏହା ଏହା ଏହା ଏହା
- 5.ମୁଖ୍ୟମାତ୍ର ଏହା ଏହା ଏହା ଏହା ଏହା PCB ଏହା ଏହା ଏହା ଏହା ଏହା ଏହା HDD BGA.

ମୁଖ୍ୟମାତ୍ର ଏହା ଏହା ଏହା) ମୁଖ୍ୟମାତ୍ର ଏହା)

ମୁଖ୍ୟମାତ୍ର ଏହା :

1. ଏହା 3) ଏହା ଏହା ଏହା).
2. ମୁଖ୍ୟମାତ୍ର ଏହା ଏହା ଏହା ଏହା ଏହା ଏହା.
3. ମୁଖ୍ୟମାତ୍ର ଏହା ଏହା ଏହା.

UV SOLIDIFIED OIL

Uv quick-drying insulating curing oil

High temperature resistance, quick drying in 2 seconds without falling off



UV SOLIDIFIED OIL



Special for repair

Manufacturing quick-drying oil

Insulation/quick drying/solder resist all done with one oil



Fixed chip, high
temperature resistance
550 °C

Durable, quick-drying
and non-softening

Fully
transparent



UV SOLIDIFIED OIL



Translucent milky white colloid

Helps with application and fixation, allowing you to observe the soldering point. ensures flying leads, looped pads, and solder pads won't detach. cures even in areas with no light exposure at the bottom


○ ● ○



UV SOLIDIFIED OIL



Scope of use

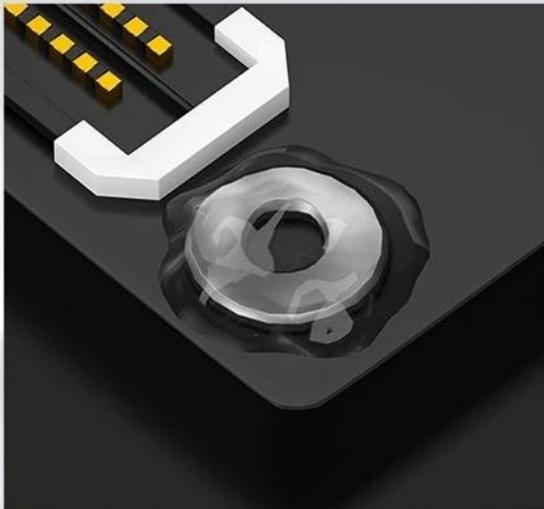


1

Motherboard screw post fixation
Main board screw column fixation


2

Mobile phone tail plug fixed
Fixed phone tail plug

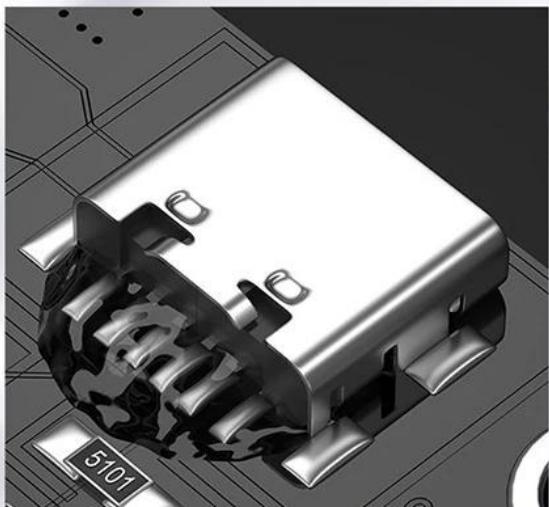

3

Fixed cable flying line

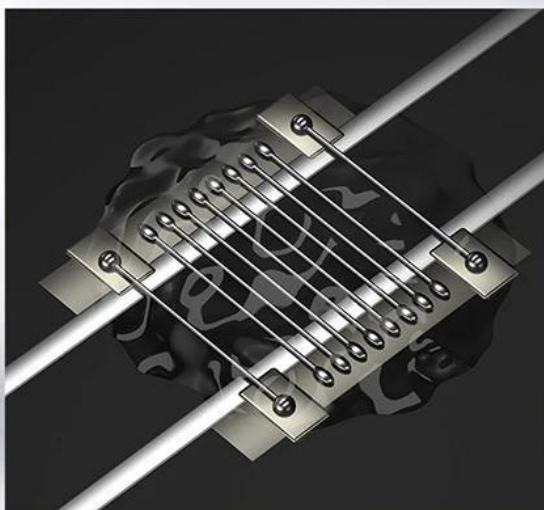

UV SOLIDIFIED OIL




2 seconds quick drying and fast curing

Repairing the welding plate is time-saving, no rework, and highly efficient.

○ ● ○

2 seconds quick drying oil

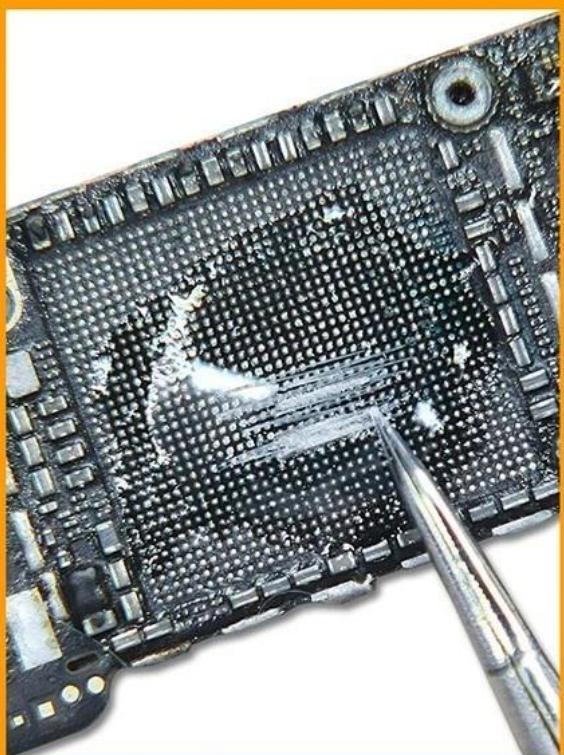

Commonly available uv-curing oils on the market

The curing time is unstable

It dries quickly in 3 seconds and does not fall off. after curing, it will be powdery when scratched



Product parameters



Product specifications

○ ● ○



Product name	Model	Capacity
Uv insulated quick-drying oil	UVH901	10g
Gross weight	Color	High temperature resistance
25.6g/18.5g	Milky white/fully transparent	550°C
Validity period	Curing time	How to use
1 year	2 seconds	Uv lamp irradiation
Product size		
Milky white model: 98*32*27mm	Transparent model: 92*32*26mm	

*the above dimensions are all measured manually, and if there is any error, it is within 1-3mm