

1. □□□□□□□□□□

3. USB□□□□□□□□;□□□□□□□□□□□□



4. IC 5V3.4A

5. 5.1 USB 3.4A USB

6. □□□□□□□□□□

7. CE RoHs

## A white, rectangular power strip is shown at an angle. It features four UK three-pin electrical outlets on the left side. To the right of these outlets are four USB ports, arranged in two rows of two. A white cable is plugged into the rightmost USB port. The power strip has a small white switch on the far left end. The background is a plain, light grey surface.



## Product Usage



MATERIAL	PC
RESOLUTION	375x65x65mm
POWER CORD	200cm
WEIGHT	400g
RATED POWER	2500W
RATED CURRENT	10A
RATED VOLTAGE	250V
USB OUTPUT	DC5V/3.4A/17W

### ▼ CHARACTERISTICS

This power strip is made of 750° safety flame retardant material. With integrated socket design, silver alloy switch can withstand 5000 times of pressure test. The socket independent safety door protection is safer to use.

## 5 steps safety protection

- 1.Lightning protection
- 2.short circuit protection
- 3.antistatic
- 4.overcurrent protection
- 5.overvoltage protection



# Full controllable switch design



Hot line does not burn at 750°, 100° heat does not deform



PC material, Flame retardant

COMPATIBLE WITH VARIOUS ELECTRONIC DEVICES

Two usb smart fast charging, automatic identification compatible, keeping current at its best status.




High quality tin phosphor bronze  
Safer thickened copper wire process





ORIGINAL PHOTO

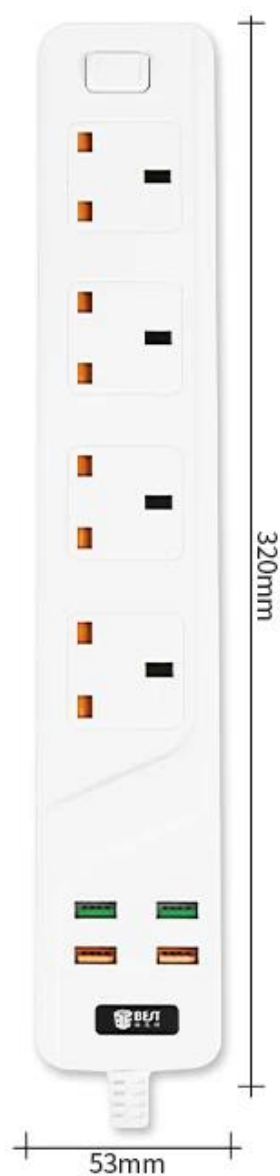



2M POWER CABLE, UK PLUG

---