


产品描述



| | | | |
|------|-----------------------------------|-----|----------|
| □□□ | □□□□□□□□ | □□□ | BST-259A |
| □□□ | □□□□PPS□□□□□□ | □□□ | □□□ |
| □□□ | □ | □□□ | >HRC40° |
| □□□ | 128mm | □□□ | 27.9g |
| □□1□ | □□□PPS□□□□□□ | | |
| □□2□ | □□□□1×10 Ω □□□□□168Mpa □□□□□47j/□ | | |
| □□3□ | □□□□□□□□□□□□□□□□ | | |
| □□4□ | □□□□□□□□□□□□□□□□□□□□□□ | | |

产品尺寸

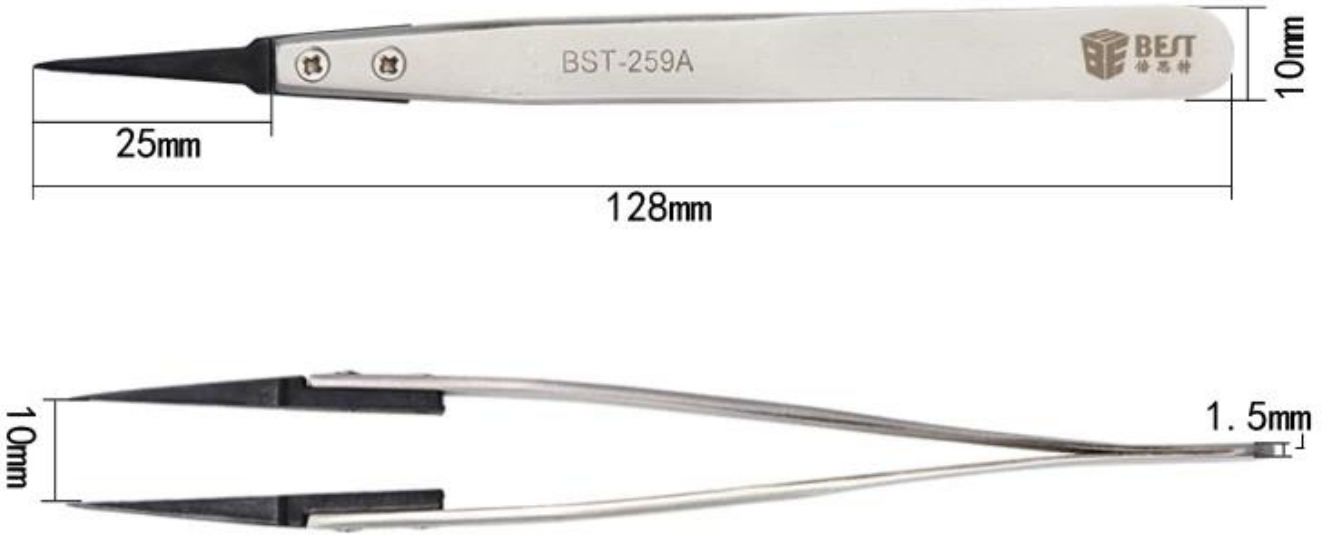

产品展示

侧面



侧面



顶视图



顶视图



局部



包装



产品细节



使用高精度设备，激光打字



4个螺丝固定头部，稳固且更换便捷



头部采用PPS高强度、防静电塑料

两尖端合拢时平稳无缝隙

产品参数

| | |
|------|---------|
| 型号 | BST-7A |
| 材质 | PPS |
| 颜色 | 黑色 |
| 硬度 | >HRC40° |
| 长度 | 122mm |
| 重量 | 27.9g |
| 包装数量 | 17 |
| 总重量 | 554g |

□□□□ 204*163*45mm□L*W*H□

□□□□ 52*42*34cm□L*W*H□

□□□□ 18kg

