| | |
|---|---|
| 1个 | 新型防震套，流线型设计，手感舒适 |
| 2 | 大屏幕显示，字体清晰 |
| 3 | 金属屏蔽板，防磁，抗干扰能力 |
| 4 | 全面保护功能，抗高压点火电路设计 |

| Fuction | Range | Accuracy |
|---|---|---|
| DC voltage | 4V/40V/400V/500V | ±（0.5%+3） |
| AC voltage | 4V/40V/400V/500V | ±（1.0%+3） |
| DC | 999.9mA/9.999A | ±（2.0%+4） |
| AC | 999.9mA/9.999A | ±（1.0%+3） |
| Resistance | 4Ω | ±（1.5%+3） |
| | 40Ω/400Ω | ±（0.5%+3） |
| | 4Ω/40Ω | ±（1.5%+3） |
| Capacitance | 20nF/200nF | ±（10%+40） |
| | 2uF/20uF/200uF | ±（2.5%+20） |
| | 2000uF | ±（5%+10） |
| On and off | ✓ | |
| NCV detection | ✓ | |
| Frequency response in AC mode: 40Hz~1khz | | |

| Product number | BST-58F |
| --- | --- |
| LCD | 4000word |
| Range | automatic |
| Material | ABS-PCV |
| Sampling rate | 3 times / sec |
| True RMS | ✓ |
| Data retention | ✓ |
| Screen backlight | ✓ |
| Flashlight lighting | ✓ |
| Low battery prompt | ✓ |
| Automatic shut-down | ✓ |
| parameter | |
| product weight | 133g |
| Product Size | 126*61*28mm |
| power supply | 1.5V AAA battery*2 |
| working environment | Remperature0~40°C Humidity＜75% |
| Storage environment | Remperature-20~60°C Humidity＜80% |

# AUTOMATIC
## —INTELLIGENT MULTIMETER—

# Product Usage

## ▼CHARACTERISTICS

This product is used for maintenance testing of various electronic products. It has metal shielding plate, anti-magnetic and anti-interference performance; full protection function, anti-high voltage ignition circuit design, automatic gear position recognition and more convenient operation.

| Fuction | Range | Accuracy |
| --- | --- | --- |
| DC voltage | 4V/40V/400V/500V | ± (0.5%+3) |
| AC voltage | 4V/40V/400V/500V | ± (1.0%+3) |
| DC | 999.9mA/9.999A | ± (2.0%+4) |
| AC | 999.9mA/9.999A | ± (1.0%+3) |
| Resistance | 4Ω | ± (1.5%+3) |
| | 40Ω/400Ω | ± (0.5%+3) |
| | 4Ω/40Ω | ± (1.5%+3) |
| Capacitance | 20nF/200nF | ± (10%+40) |
| | 2uF/20uF/200uF | ± (2.5%+20) |
| | 2000uF | ± (5%+10) |
| On and off | ✔ | |
| NCV detection | ✔ | |
| Frequency response in AC mode: 40Hz~1khz | | |

| Product number | BST-58F |
| --- | --- |
| LCD | 4000word |
| Range | automatic |
| Material | ABS-PCV |
| Sampling rate | 3 times / sec |
| True RMS | ✓ |
| Data retention | ✓ |
| Screen backlight | ✓ |
| Flashlight lighting | ✓ |
| Low battery prompt | ✓ |
| Automatic shut-down | ✓ |
| parameter | |
| product weight | 133g |
| Product Size | 126*61*28mm |
| power supply | 1.5V AAA battery*2 |
| working environment | Remperature0~40°C Humidity＜75% |
| Storage environment | Remperature-20~60°C Humidity＜80% |

# PRODUCT INFORMATION

1KH true RMS
NCV induced voltage
AC and DC current
AC and DC voltage
Zero fire line identification
Resistance on and off

Specifically for the following problems

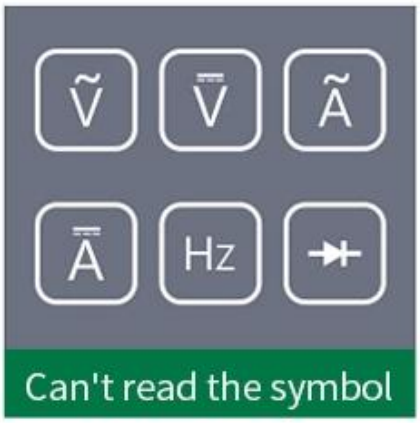


Can't read the symbol

Complex range

Don't know how to operate

# Automatic identification within 3 seconds

1: Long press the yellow button to start the device

2: Automatic measurement of gear position

SCREEN BACKLIGHT
EASY TO READ

# NCV Non-contact Test

Long press NCV to enter induction mode NCV sensing area

# PRODUCT SIZE

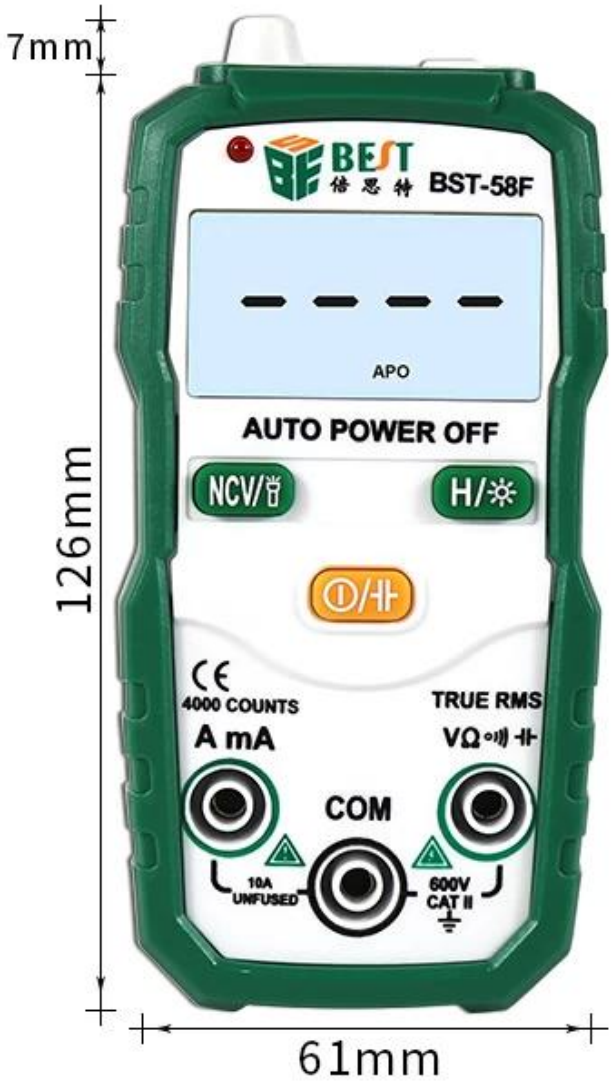

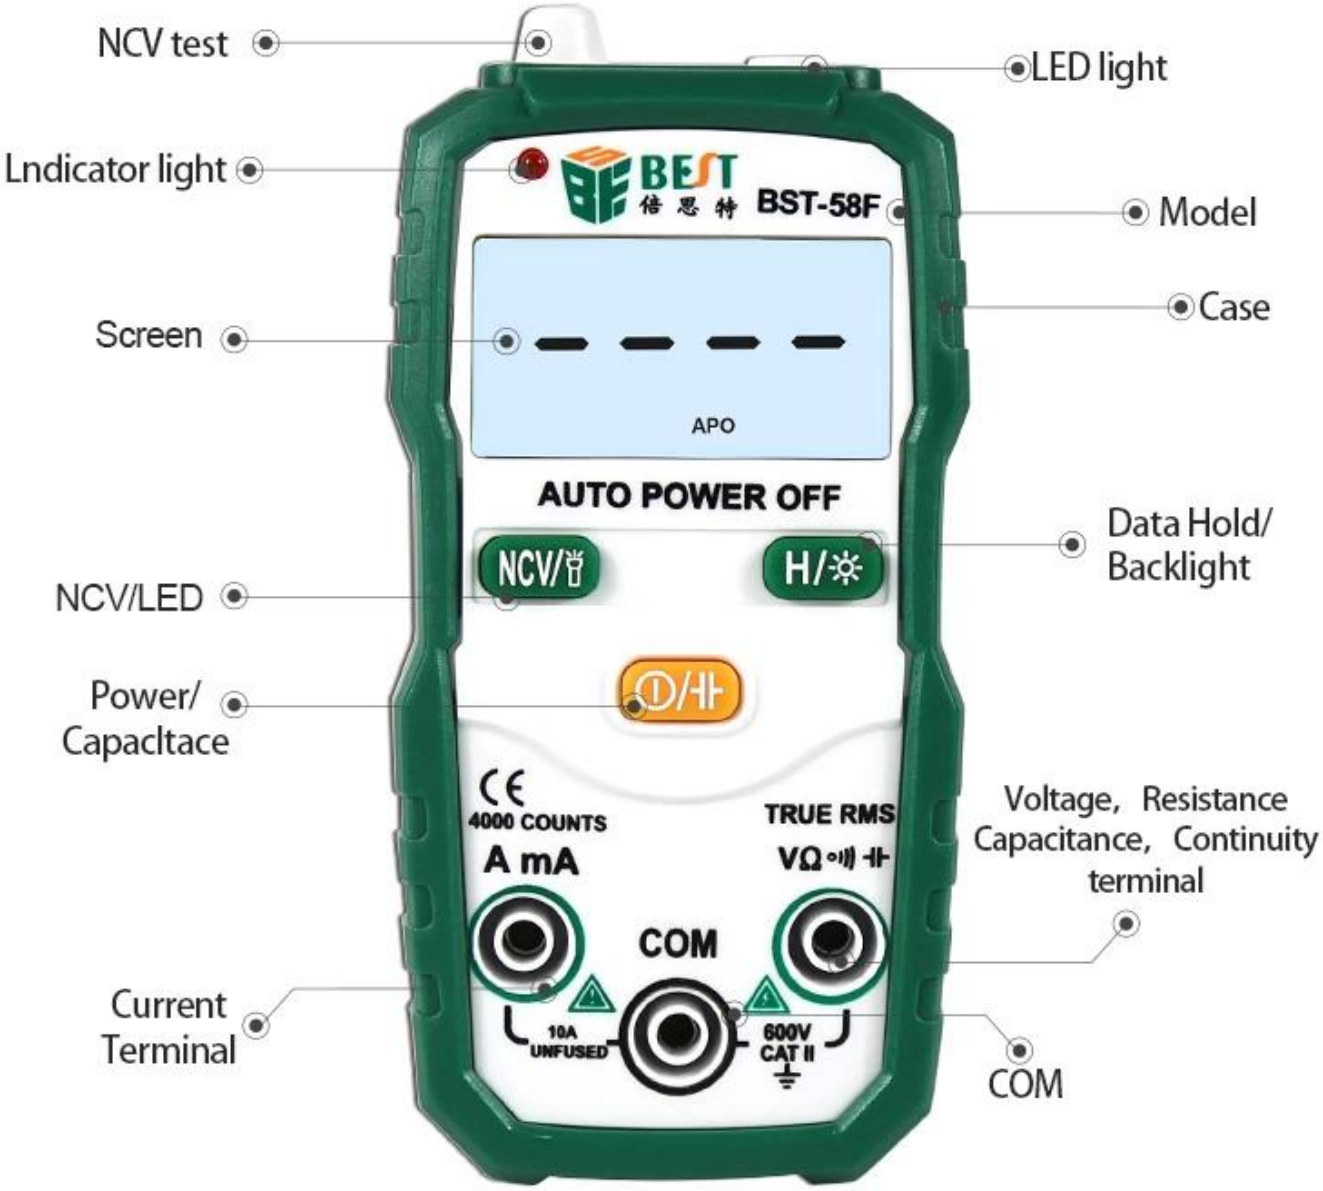
NCV test
LED light
Lndicator light
BEST
倍思特
BST-58F
Model
Case
Screen
APO
AUTO POWER OFF
Data Hold/
Backlight
NCV/LED
NCV/
H/
Power/
Capacltace
4000 COUNTS
A mA
TRUE RMS
VΩ
Voltage, Resistance
Capacitance, Continuity
terminal
COM
Current
Terminal
10A
UNFUSED
600V
CAT II
COM

## PRODUCT SIZE

# On-off test

# AC voltage test

# DC voltage test

# Capacitance test

# Diode test

# Resistance test