

PRODUCT PHOTOGRAPH





PRODUCT SIZE



PRODUCT DISPLAY



Display bit: 3 1/2 bits

Accuracy: + 0.5%

Input impedance: 10M



Maximum display: 1999

Power supply: 9V (6f22)

Mode of operation: manual range

PRODUCT PACKAGING

WEIGHT:330G

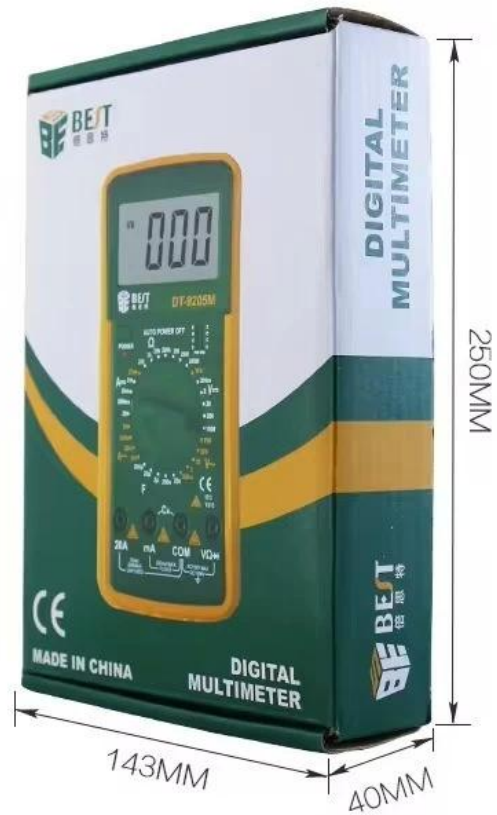

PARTS

PACKING

□□□□

□□□□	□□□	□□□
□□□□	200mV/2V/20V/200V/1000V	±(0.5%3)
□□□□	200mV/2V/20V/200V/700V	±(0.8%5)
□□□□	2□□/20□□/200□□/20□	±(0.8%10)
□□□□	2□□/20□□/200□□/20□	±(2.0%5)
□□	200Ω/2kΩ/20kΩ/200kΩ/2MΩ/20MΩ/200MΩ	±(0.8%3)
□□	200uF/20uF/2uF/200nF/20nF	±(2.5%20)
□□□□	9205M	
□□□□□□□□	√	
□□□□	√	
□□□□□	√	
□□□□	√□□□□□□□	
□□□□	√	
200mA□□□□	√	

20A□□□□

□□□□

□□□□

□□

□□□□

□□□□□

□□

√

√

10□□

□□□□

1999□

59×31□□

9V□6F22□