

HIGH TRANSMISSION


Dolphin clip test leads



Product Usage



| | |
|-----------------------|-------------------|
| Model | BST-030-JP |
| Safety Ratings | 2000V 20A |
| Material | silicone + copper |
| Wire length | 41inch / 104cm |
| G.W. | 58.9g |
| Package Size | 200*120mm |

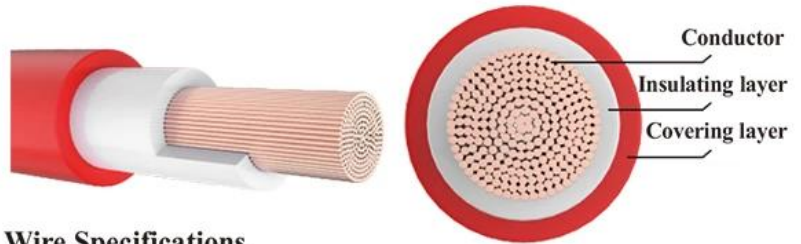

Wire Specifications

Conductor:

| | |
|---------------|------------|
| Specs | 18AWG |
| Structure | 168/0.08AS |
| Diameter | 1.35MM |
| Length of lay | 25MM |

Insulating layer:

| | |
|-----------|------------|
| Thickness | 0.6MM |
| Diameter | 2.6±0.05MM |
| Material | Silicone |


Covering layer:


| | |
|-----------|-----------|
| Thickness | 0.6MM |
| Diameter | 3.5±0.1MM |
| Material | Silicone |

resistant to both heat and cold
Long service life



Dolphin clip, Strong bite force
The spring in bold, Not easy to fall off, Welding is firm

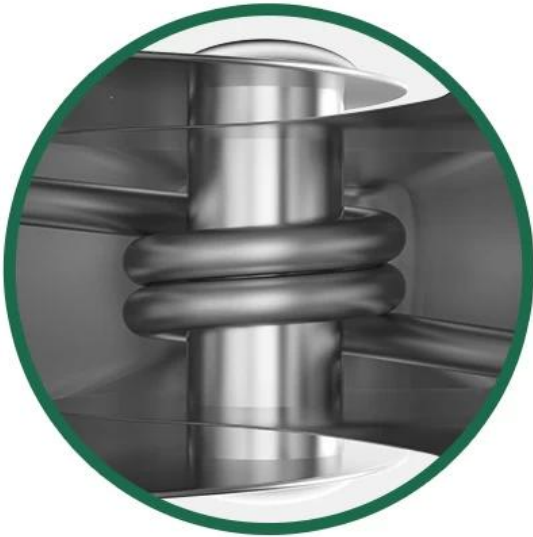

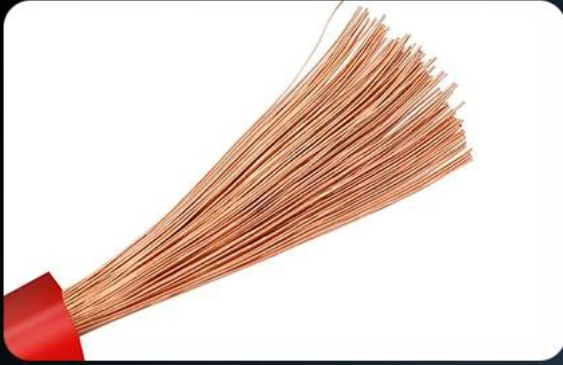

BST-030-JP



Poor quality clip wire

Non-oxidation / Long service life

Easy to oxidize / Short service life

Anti-freezing and anti-heat / Not easy to break

Not freeze-proof and heat-proof/easy to break

Good conductivity

Poor conductivity

It doesn't get hot/ Not hot / Safe usage

Easy to get hot/Safety hazard



Insulating silicone,
Won't leak



Environment-friendly soft silicone



Not easy to break, good toughness



Fast transmission, steady current,
168pcs of copper wire



Product List

Soft Silicone-- heat and cold resistance



G.W.:58.9g



200mm

120mm