

1. 100% LED 测试
2. 100% 老化测试
3. 100% 亮度测试
4. 100% 色温测试
5. 100% 100°C 高温测试
6. 100% 电压测试
7. 100% 电流测试

□□□

□□□□□□ PCB □ IC SMT □ SMD □□□□□□

Specification


| | |
|----------|----------------|
| □□□□ | |
| □□□□ | □□220V±10□50Hz |
| □□□□ | 720□W±10□ |
| □□□□ | 100°C□450°C |
| □□□□ | □□□□□□/□□ |
| □□ | 120L /□□□□□□ |
| □□□□ | ±2°C □□□□ |
| □□□□ | □□□□ |
| □□ | LED □□ |
| □□□□□□ | □□□□ |
| □□ | □□ 45□□ |
| □□□□ | 5□□□8□□□10mm |
| □□□□ | □□□□□□ |
| | |
| □□□□ □□ | |
| □□□□ | AC 26V±10□50Hz |
| □□□□ | 40W±10□ |
| □□□□ | 200°C□480°C |
| □□□□ | ±2°C □□□□ |
| □□□□ | □□□□ |
| □□ | LED □□ |
| □□□□□□ | □□□□ |
| □□□□□□□□ | <2Ω |
| □□□□□□□□ | <2mV□ |
| □□ | BST900 - M-T-□ |
| □□□□ | □□□□□□□□ |

2 in 1 digital display lead-free helical wind hot air soldering station

Appliance Repair



Board soldering

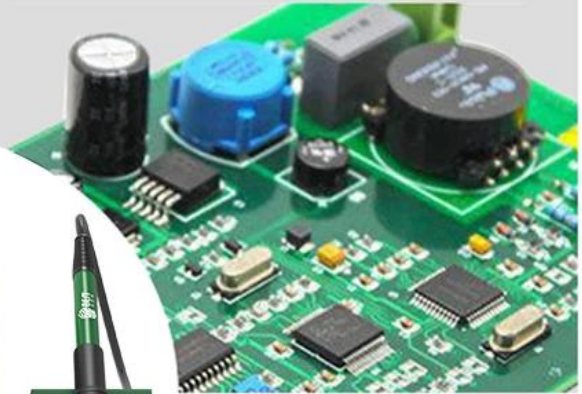

Phone Repair



Heat shrinkable tube



PRODUCT SIZE




PRODUCT DETAILS





PRODUCT FEATURES



| | | | |
|-----------------------------------|--|-------------------|--|
| Brand: |  | Name: | 2 in 1 digital heat gun rework station |
| Model: | BST-898D+ | Rated voltage: | AC 110/220V 50/60HZ |
| Rated power: | 720W | Airflow: | 120L/min (Max) |
| Air gun temperature range: | | 100 ° C - 450 ° C | |
| Soldering iron temperature range: | | 200 ° C - 480 ° C | |
| Weight(including packaging): | 2.75KG | Size: | |
| | | Packing: | L265*W170*H145mm |
| | | Machine: | L98*W140*H132mm |
| Accessories: | 898D+, wind gun nozzle 5, 8, 10mm, soldering iron frame, power cord, air gun handle, soldering iron handle, wrench, starter | | |
| Features: | 1. 1. LED air gun temperature display and soldering iron temperature display, temperature is accurate and stable, clearly visible | | |
| | 2.Imported ceramic heating core, the handle is made of high temperature resistant silicone wire. | | |
| | 3. When the air gun is placed on the bracket, it will automatically enter the cooling and cooling standby. When the air gun is picked up, it will heat up quickly. | | |
| | 4. High power, fast heating, anti-static, temperature adjustable | | |



Imported ceramic heating core, the handle is made of high temperature resistant silicone wire.




200°C~480°C

Rapid temperature rise
durable Intelligent, put back on the
bracket to automatically cool down



Pure copper transformer

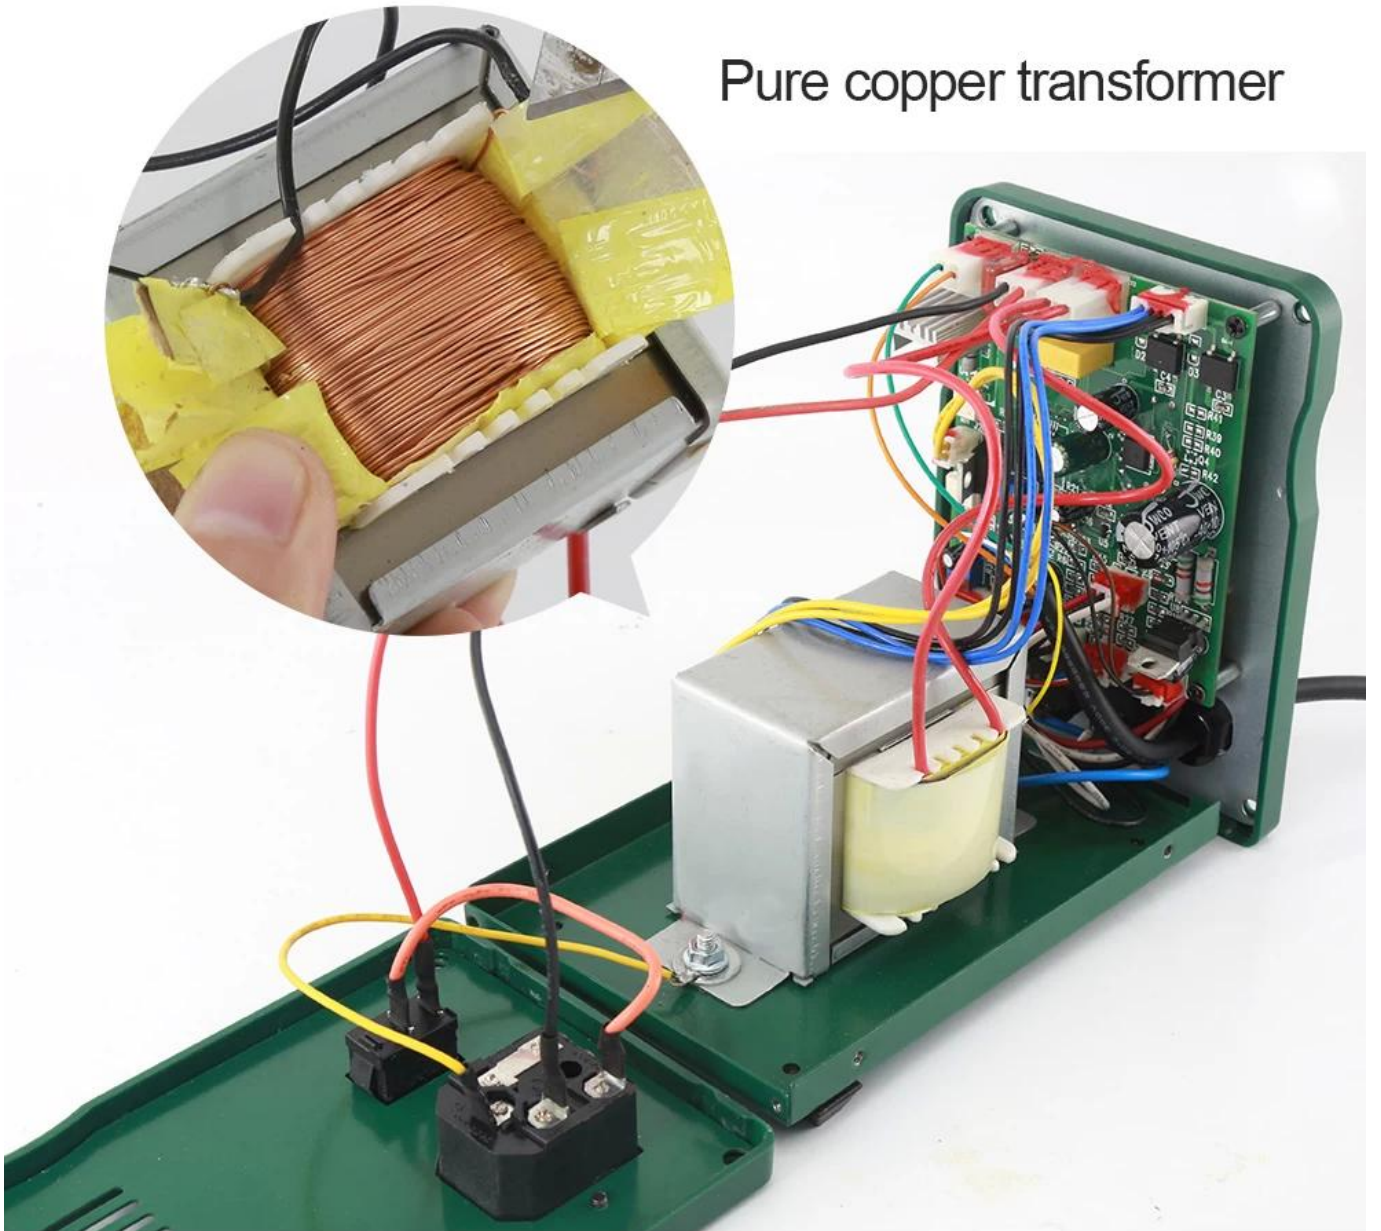



PRODUCT PACKAGING

| | | |
|---|---|--|
|  <p>Package: 265*170*145mm</p> |  <p>BST-898D+</p> |  <p>Power cable</p> |
|  <p>Soldering Iron frame</p> |  <p>Soldering Iron</p> | <p>Starter </p> <p>Wrench </p> <p>Wind gun nozzle 5, 8, 10mm </p> |