

Features

1. 100% lead free
2. Available in QFP, SOP, PLCC, SQ packages
3. RoHS compliant
4. High reliability

Specification

Operating Voltage	220V / 110V ± 10% 50Hz / 60Hz
Power Consumption	650W ± 10%
Operating Temperature	100°C ~ 480°C
Storage Temperature	-40°C ~ 125°C
Lead Time	120 days
Temperature Accuracy	± 2°C
Accuracy	± 0.5%
Light Source	LED
Wavelength	630nm
Beam Diameter	45mm
Dimensions	5mm 8mm 10mm
Weight	0.1g
Operating Voltage	1.7V
Dimensions	26 * 16.5 * 14.8mm
Dimensions	53.5 * 34 * 47.5mm
Dimensions	12mm
Dimensions	22mm
Dimensions	3mm

PRODUCT DISPLAY



PRODUCT SIZE



PRODUCT DETAILS



PRODUCT FEATURES



Front




Behind

Name: Lead screw type hot air gun

Features2: Brushless fan with long lifetime, low noise

Features3: Adjustable airflow, large and soft airflow, easy adjustment of temperature, suitable for multiple usages
Features4: Automatic cooling function of the system will prolong the life of heating element, and protect the hot air gun.

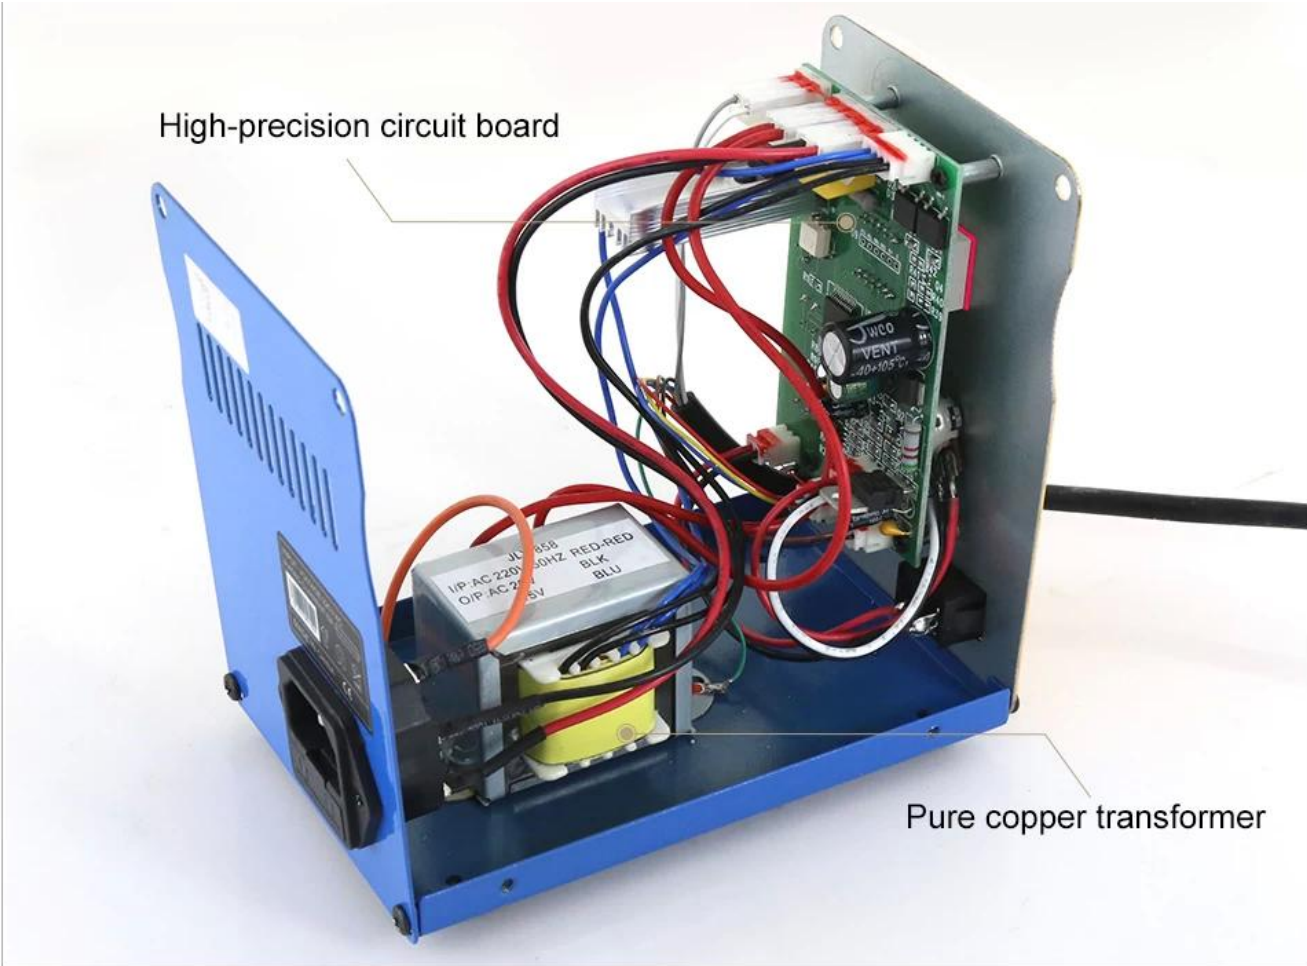

High-precision circuit board

Pure copper transformer

Internal structure

High-quality heating body warming fast
Ni-Cr alloy heating core, fast heating,
high temperature, long life, real material



PRODUCT PHOTOGRAPH



PRODUCT PACKAGING

WEIGHT:1.7KG

