Total Magnification:	7X-45X / *7X-90X / *7X-180X / *3.5X-90X / *3.5X-45X			
Continuous zoom ratio:	1:6.5;			
Eyepiece:	High eye point wide angle WF10×/φ20mm; wide angle WF20×/φ10mm (≥90X)			
Observation tube:	Hinged trinocular, 45° tilt,	spacing 55-75mm;		
Objective:	Continuous zoom	Objective:	0.7X-4.5;	
Diopter:	Binocular vision adjustment range ±6;			
Support:	Double pole gimbal (WX type);			
Bottom seat:	Large base (V type), 200 × 245mm;			
Field of view diameter:	φ5mm-φ30mm;	Focus mechanism:	XTWZ bracket	
Package:	Foam + carton;			
Others:	With ring light interface; comes with TV interface; LED ring light set of 5500 color			
	temperature, 8W brightness adjustable			
Optional:	Wide-angle eyepiece 20X;	* Increase objective lens 2X; *	14/-:	24 401/0
	Increase objective lens 0.5	X	Weight: 21.40KG	
Working distance:	It is 100mm when no additional objective lens is added, plus 165mm for			
	adding 0.5X additional objective lens, 30mm for adding 2X additional objective len			

## PRODUCT DETAILS















## Adjustable Suitable for different groups of people





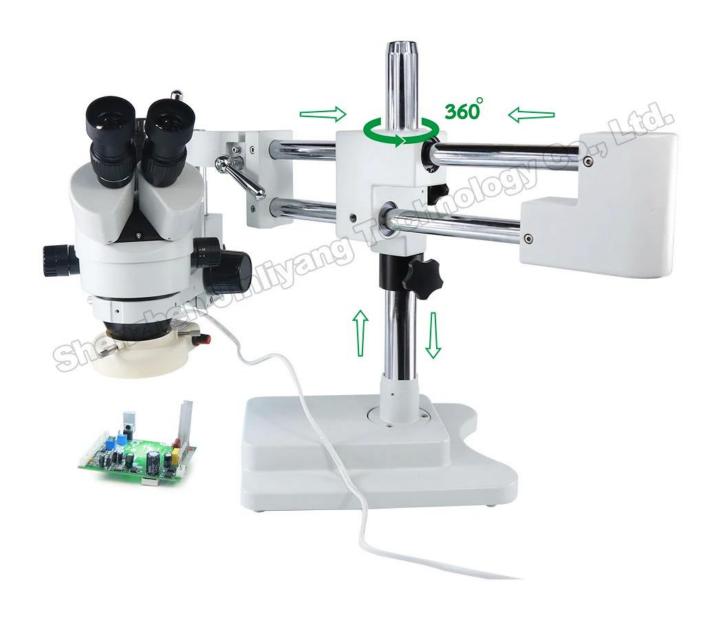



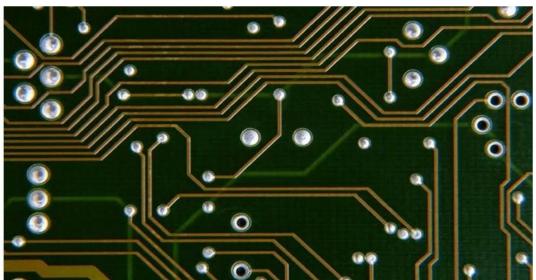

Circuit board



Fiber Bud



Precision instrument