




## Product Usage

BASIC SKILLS	RANGE	BASIC ACCURACY
DC VOLTAGE	220mA/2V/20V/200V/500V	± (0.5%+4)
AC VOLTAGE	200V/500V	± (0.8%+10)
DC CURRENT	2mA/20mA/200mA/10A	± (0.8%+3)
RESISTANCE	200Ω/2KΩ/20KΩ/2200kΩ/2MΩ	± (0.8%+5)
SPECIAL FUNCTION	BST-VC830L	
DIODE, TRIODE TEST	✓	
ON-OFF ALARM	✓	
LOW VOLTAGE DISPLAY	✓	
FUNCTIONAL PROTECTION	✓	
200MA GEAR INSURANCE	✓	
10A GEAR INSURANCE	✓	
EARTHQUAKE PROTECTION	✓	
INPUT RESISTANCE	10MΩ	
OPERATION METHOD	Manual range	
MAXIMUM DISPLAY	1999	
LCD DISPLAY	40X32mm	
POWER SUPPLY	9V(6F22)	
BODY COLOR	white green combination	
BODY WEIGHT	150g	
DIMENSIONS	143x70x33.2mm	
STANDARD ACCESSORIES	Test pen, battery, English manual	
STANDARD INNER PACKAGING	Color box	
STANDARD PACKAGE QUANTITY	100 units	
PACKAGE SIZE	158x108x50mm	
CARTON SIZE	600*450*405mm	
CARTON GROSS WEIGHT	24.7kg	



# EASY TO READ DATA

BACKLIGHT DISPLAY

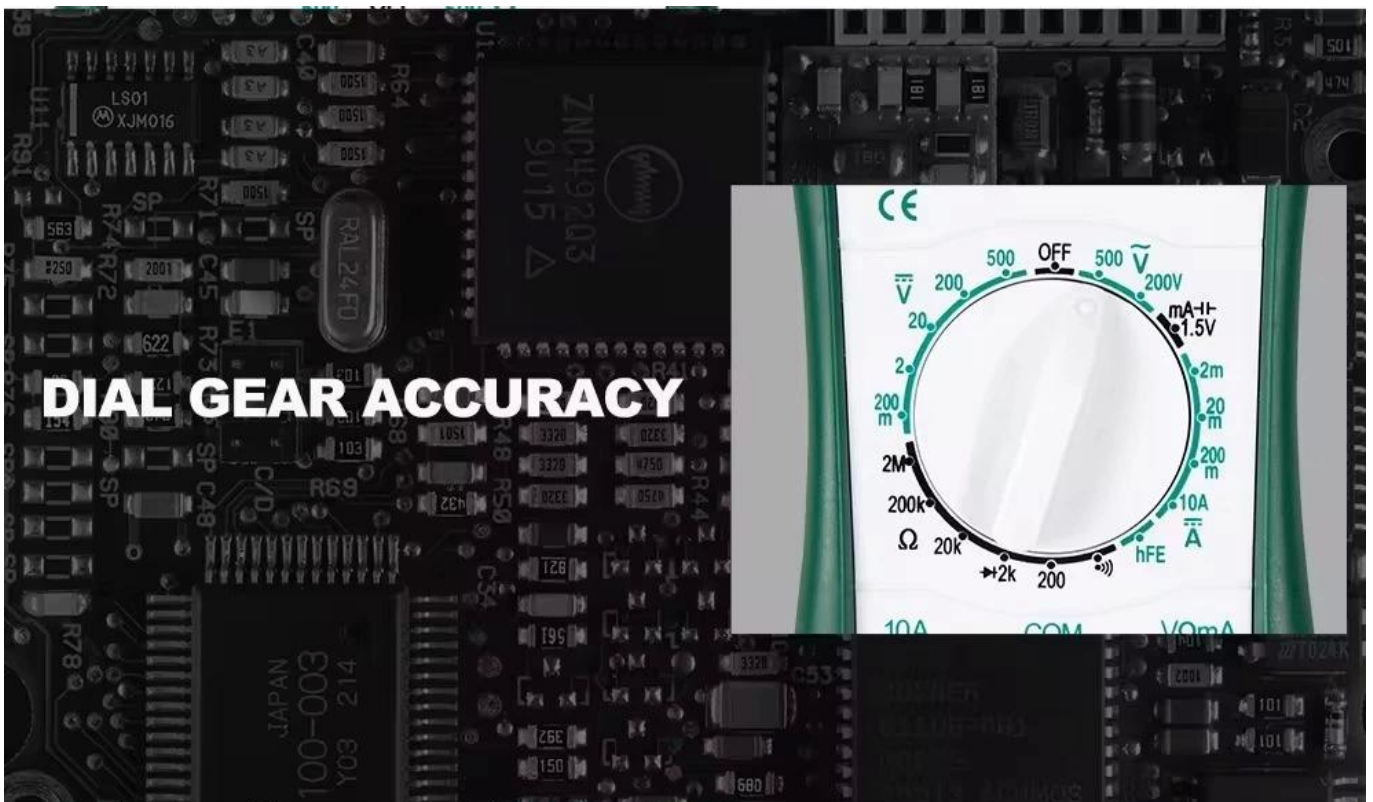





**WIPE LINE JACK  
EASY TO INSERT  
JACK FASTENING**











PRODUCT SIZE

