

1. Spannung und Strom sind stufenlos von Null bis zum Nennwert einstellbar.
2. Total Power Fuß, hohe Stabilität und zuverlässige Qualität
3. Mit Überstromschutz und automatischer Wiederherstellungsfunktion
4. Kann GSM, CDMA, PHS RF Signal erkennen
5. Spannung und Strom werden gleichzeitig am Zeiger angezeigt.
6. mit 9V USB-Ladegerät

Anwendung: DC-Stromversorgung ist weit verbreitet in verschiedenen Umgebungen wie Institutionen Laboratorien, automatisierte Testgeräte, elektronische Testgeräte, Fabrik Produktionslinie ect.

Nennbetriebsbedingungen

●Eingangsversorgungsspannung	220 V $\pm$ 10% 50 Hz
●Betriebstemperatur	40 °C ~ 70 °C
●Lagertemperatur	-20 °C~80 °C
●Lagerbedingungen	5% -95% nicht kondensierend
●Nennausgangsspannung	0~15V
●Nennausgangsstrom	Max 2A
●Nennleistung	35W Max
●Anzeigeauflösung des Messgeräts	2,5%
●Ripple und Lärm	$\leq$ 1mVRMS
●Temperaturkoeffizient:	$\leq$ 300ppm / ° C
●Leerlaufverlust:	& lt; 0,25 W
●Ausgangswelligkeitsfaktor:	& lt; 20MV
●9V Ausgangsleistung	& lt; 15MV
● 9V Ausgangsleistung	500 MW max
●USB-Ausgabefähigkeit;	500 MW max
●Diode Testfunktion:	Pathway Piepton

Packspezifikationen

Körpergewicht	1.9kg
Die Boxgröße	27* 14* 22cm
Packungsgröße	76 * 28.5 * 46cm
Verpackung	10 Sätze
Ein Kartongewicht	21kg
Passend zu:	Ein Handbuch, ein Paar Tischlinien, ein Schnittstellenkabel, eine 9V-Leitung


PRODUCT DISPLAY




PRODUCT SIZE



PRODUCT DETAILS

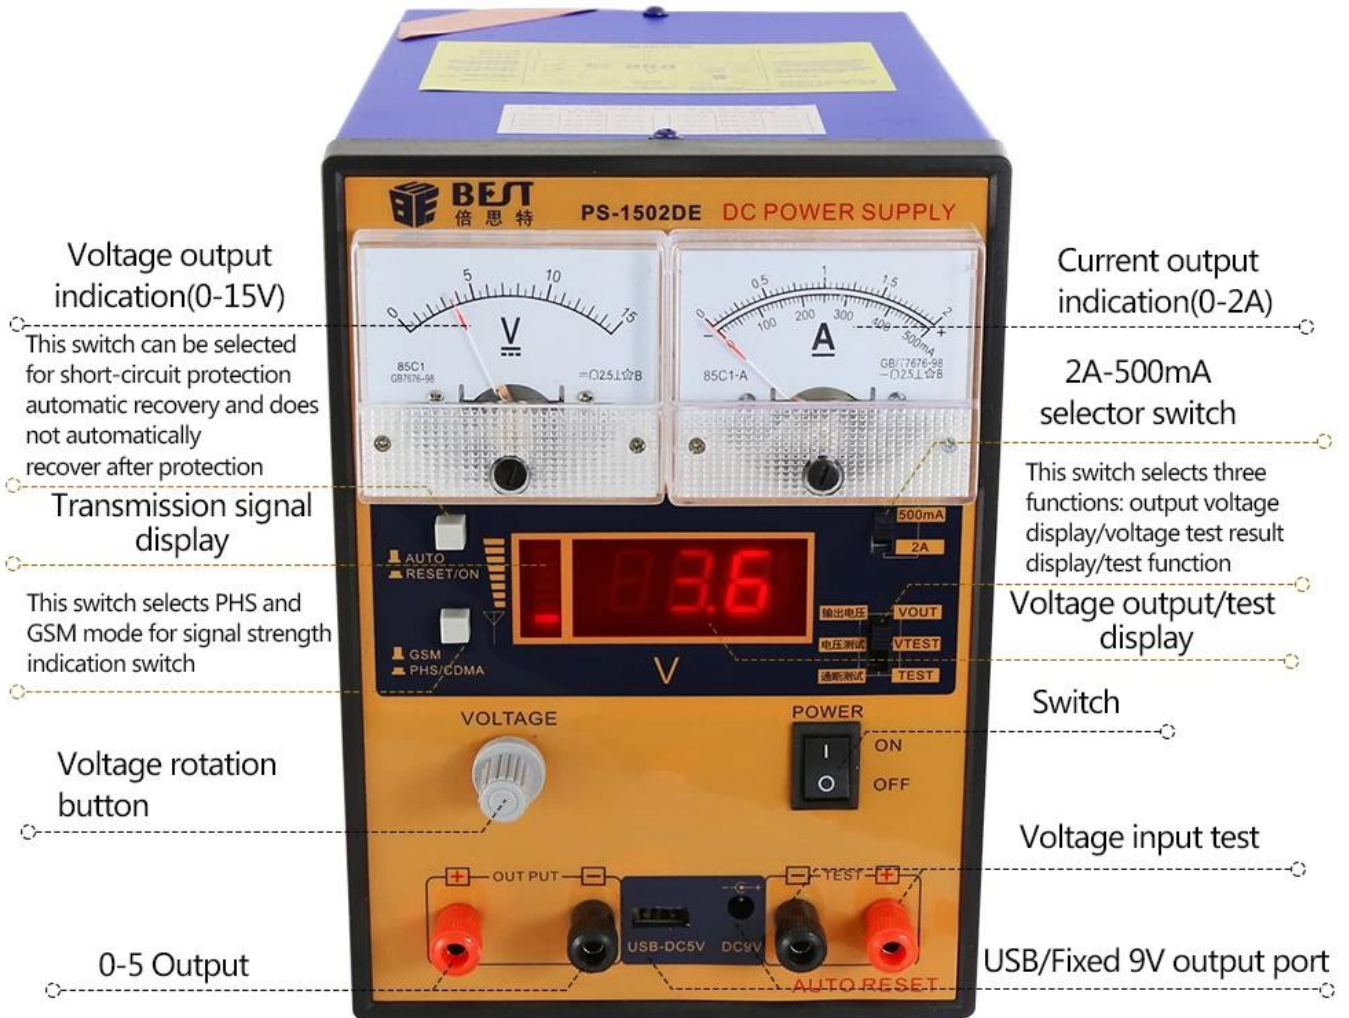


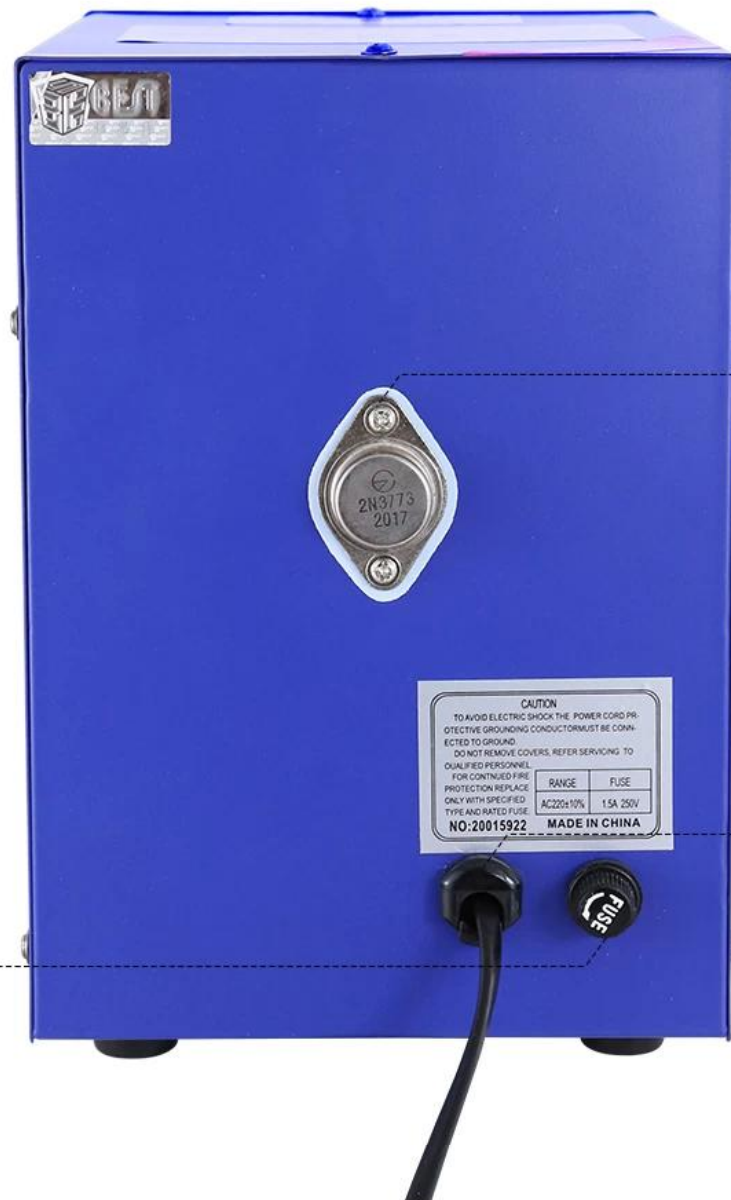

Regulator
(Malaysia imported)


Power cable

Fuse

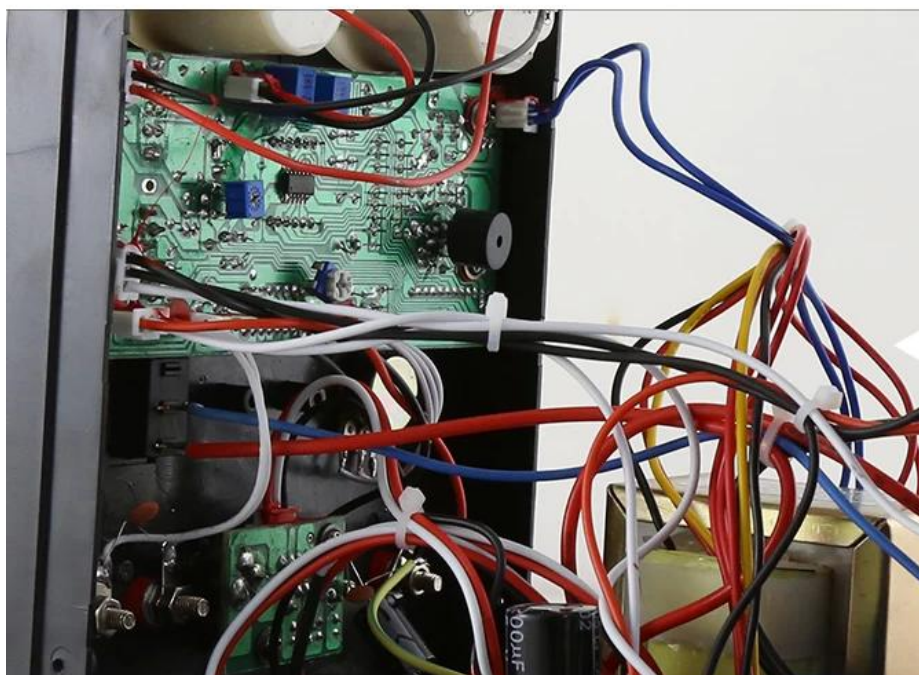

*Integrated motherboard
(reducing the number of
multi-line connected
together, performance has
greatly improved in all
aspects) Model and model
unified motherboard
(BST brand)*

*Large transformer:
IE6636 transformer,
pure copper cable,
the performance of
output voltage stability.*

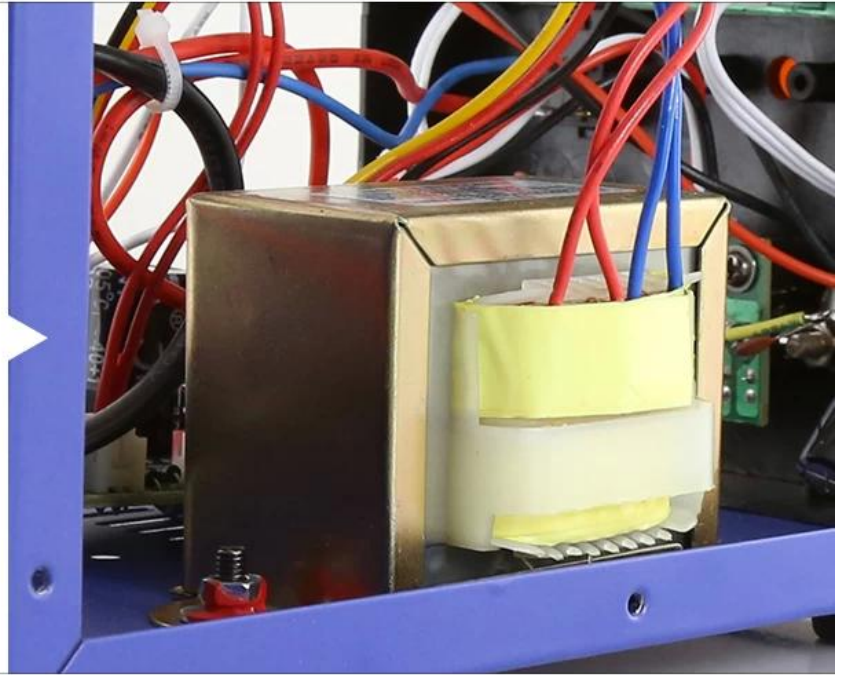

Rated working conditions

voltage	220v ± 10%
working environment	-10 °C ~ 40 °C Relative humidity: <90%
Storage environment	-20 °C ~ 40 °C Relative humidity: <80%
Corrugated factor	<= 0.5mvrs (5Hz-1MHz) Iomax> 1A
Features	Short circuit protection / overload protection / alarm function / automatic recovery

Regulated working conditions

Power stability	<=0.01% + 2mV
Load stability	<=0.01% + 2mV (1max<1A)
Recovery Time	<=100us (maximum current <=5A)

Specifications

model	PS-1502T	PS-1502DE
Body weight	2.3KG	1.9KG
Dimensions	140mm*225mm*200mm	
Voltage and current	0-15V/fixed 9V output/0-2A0.1V	
Features	Short circuit protection, automatic recovery, voltage test, continuity test	
Signal detection function	Can detect GSM RF signals	Can detect three network RF signals
Voltage display accuracy	0.1V	
Current display accuracy	50ma	
Mobile signal strength indicator	Have	
Brush power supply function	Have	
Short-circuit/overload hold alarm function	Have	

PRODUCT PACKAGING

WEIGHT:1.9KG



1502DE



Box
265mm*146mm*218mm

全功能电源供电器
REGULATED DC POWER SUPPLY

使用说明书 INSTRUCTION MANUAL

1502USB/1502DQ/1502DD+/1502D+

中文/English



本产品符合CE认证标准，本产品符合CE认证标准，本产品符合CE认证标准。
This product meets CE certification standards. This product meets CE certification standards. This product meets CE certification standards.

Instructions



Test lead test line



Power test line



9V charging line