

Name: Aufbewahrungs-Lötdocht

Modell: VB-1515B, 2015B, 2515B

Breite: 1,5 mm, 2,0 mm, 2,5 mm

Länge: 1,5 m

Besonderheit:

Draht-ESD

Draht flexibel

Draht aus reinem Kupfer

Drahtführungsrille

Drahtklemmstellen

Hochwertige Materialien

Umweltschutz

Schnelle Wärmeleitfähigkeit

2 Boxen kleiner Stauraum

# VBEST

## Storage type

Strong cleaning tin absorption line

### STORAGE TYPE TIN ABSORBING TAPE

- Low residue
- Tin fast
- With storage



# Small objects multi-purpose

Can accommodate all kinds of small screw parts

---

The countertop is clean and tidy,  
and the parts are not lost.





# Pure copper precision geometry

## Shape woven


---

Greatly reduce the damage to the circuit board, heat conduction on the tin fast performance is good

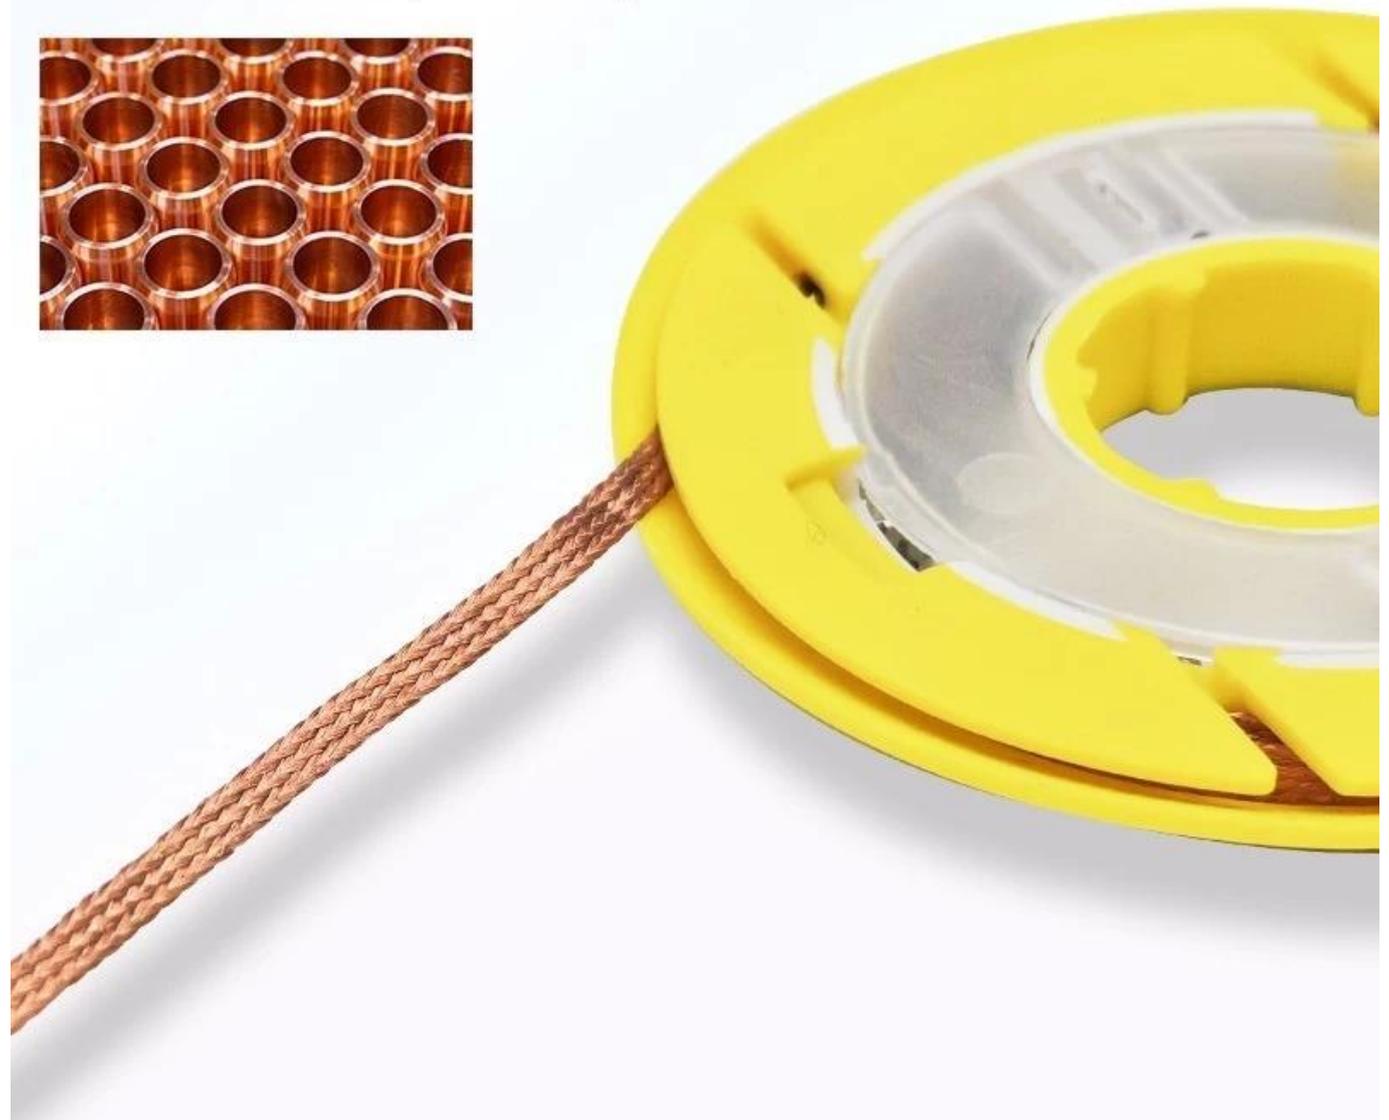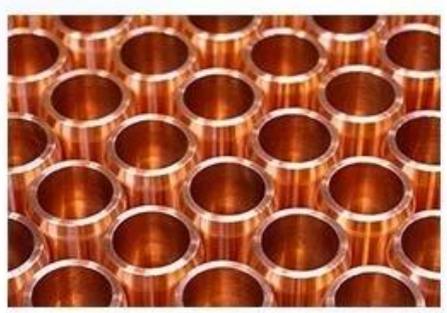

# Low consumption and good absorption

New copper weave design, soft tin absorption tape, no second-hand copper, good absorption, use a small amount of tin absorption tape to remove more solder

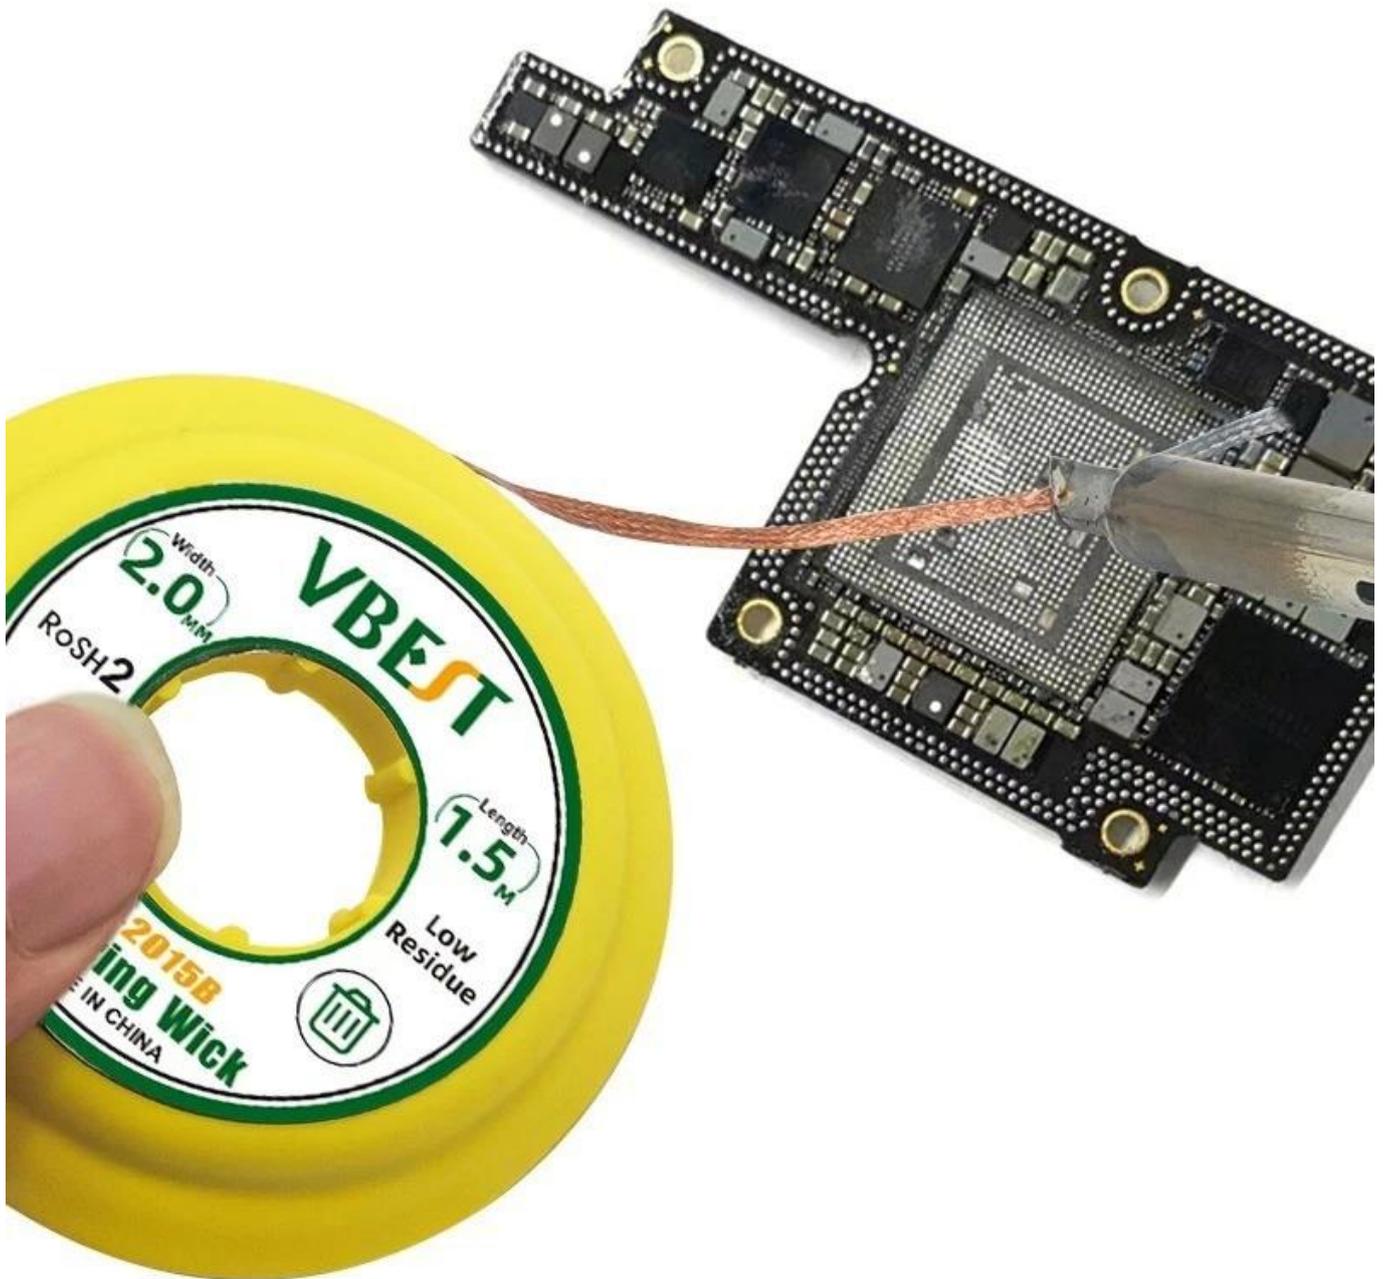

# Product Parameters



Name

Model No.

Storage type solder wick

VB-1515B, 2015B, 2515B

Line warp Diameter

Length

1.5,2.0,2.5mm

1.5M

Weight G.W.

Size

13g

57\*10mm

## Multiple specifications

Applicable to all kinds of different suction tin scene

---



# Strong cleaning low residue

The tin absorption belt contains Rosin, smooth tin dragging, good absorption and protection of components



Mobile phone Motherboard: absorb excess welding when removing tin

Tin, oxidation and corrosion resistance, thermal conductivity on tin

Can be good, tin absorption clean, in desoldering, core

After the chip is removed, there will be a large number of circuit boards.

The solder, which affects the soldering of the chip,

Usually clean with suction tin belt.

# Product Parameters



Name

Model No.

Storage type solder wick

VB-1515B, 2015B, 2515B

Line warp Diameter

Length

1.5,2.0,2.5mm

1.5M

Weight G.W.

Size

13g

57\*10mm