BEST-898D 2 en 1 estación de retrabajo BGA de pantalla LED de aire caliente


Descripción del producto

- 1. Conveniente dispositivo portátil portátil y pantalla LED digital.
- 2. Control del microordenador, calentamiento rápido.
- 3. Ajuste la rotación del flujo de aire y la temperatura.
- 4. Consulte las instrucciones suministradas con las piezas de repuesto para las tres boquillas (grande, mediana y pequeña).
- 5. Si el valor de la resistencia no es correcto, la parte será reemplazada.
- 6. Cuando la temperatura es inferior a 70 $^{\circ}$ C, la rotación se puede detener automáticamente.
- 7. Sistema inteligente, alarma automática, detección de fallos.
- 8. Este producto tiene protección ESD.
- 9. Resistencia de alta calidad y larga duración.
- 10. La carcasa exterior está hecha de material de aleación y se ve bien.
- 11. Asegure la soldadora QFP, PLCC, BGA y otros componentes sensibles al calor.
- 12. Detección inteligente y función de aire frío.
- 13. Las líneas verdes y el calor corporal de silicona de alta calidad ayudan a prolongar la vida útil y ahorrar electricidad.

El embalaje incluye

898D, 5, 8, boquilla de pistola de viento de 10 mm, bastidor del soldador, cable de alimentación, empuñadura de pistola de aire comprimido, mango del soldador, llave, arrancador

2 in 1 digital display lead-free helical wind hot air soldering station

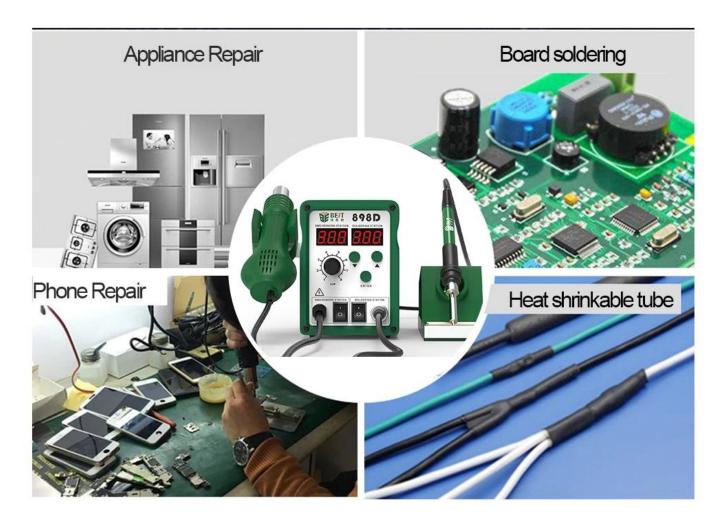








PRODUCT FEATURES



Brand:		BEIT		Name:	2 in 1 digital heat gun rework station
Model: BST-89		8D Rated		voltage:	AC 110/220V 50/60HZ
Rated power: 700W			Airflow:		120L/min (Max)
Air gun temperature range:		100 ° C - 450 ° C			
Soldering iron temperature range:			200 ° C - 480 ° C		
Weight(including packaging):		2.75KG	Size:	Packing:	L265*W170*H145mm
				Machine:	L98*W140*H132mm
898D, wind gun nozzle 5, 8, 10mm, soldering iron frame, power cord, air gun					
handle, soldering iron handle, wrench, starter					
Features: 1. LED air gun temperature display and soldering iron temperature display,					
tem	emperature is accurate and stable, clearly visible				
2. Whe	2. When the air gun is placed on the bracket, it will automatically enter the cooling				
and cooling standby. When the air gun is picked up, it will heat up quickly.					
3. High power, fast heating, anti-static, temperature adjustable					
	erature in temperature in temperature in 898D handle 1. LED tem 2. When and	BST-89 700W erature range: n temperature randing packaging): 898D, wind gur handle, soldering 1. LED air gun te temperature i 2. When the air gund cooling st	BST-898D 700W erature range: in temperature range: ling packaging): 2.75KG 898D, wind gun nozzle 5, handle, soldering iron har 1. LED air gun temperature temperature is accurate 2. When the air gun is place and cooling standby. Wh	BST-898D Rated 700W erature range: 100 ° 0 itemperature range: 200 ° 0 ling packaging): 2.75KG Size: 898D, wind gun nozzle 5, 8, 10mr handle, soldering iron handle, wre 1. LED air gun temperature display temperature is accurate and sta 2. When the air gun is placed on the and cooling standby. When the a	BST-898D Rated voltage: 700W Airflow: return range: 100 ° C - 450 ° C temperature range: 200 ° C - 480 ° C ling packaging): 2.75KG Size: Packing: Machine: 898D, wind gun nozzle 5, 8, 10mm, soldering handle, soldering iron handle, wrench, starte 1. LED air gun temperature display and solder temperature is accurate and stable, clearly 2. When the air gun is placed on the bracket, i and cooling standby. When the air gun is pi





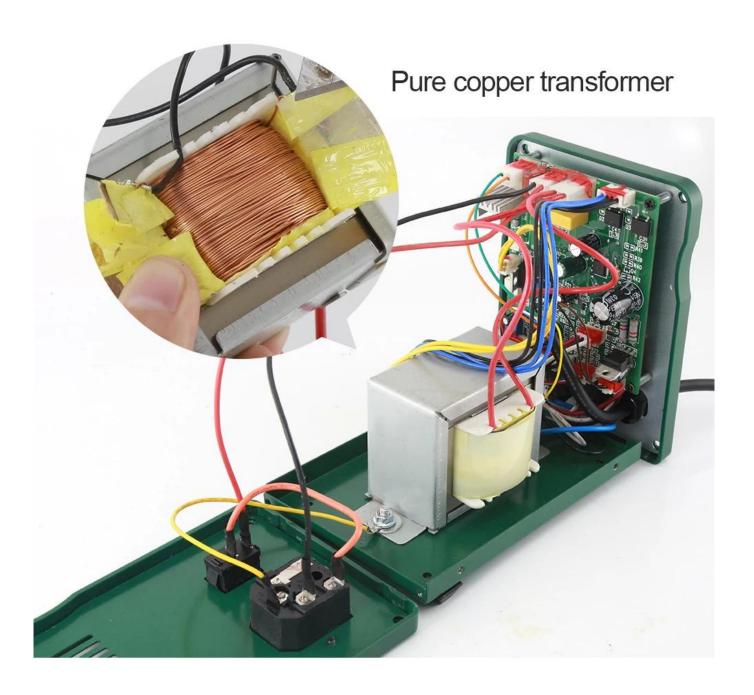



PRODUCT PACKAGING

