1	Nueva funda a prueba de golpes, diseño aerodinámico, cómoda al tacto
2	Pantalla grande, fuente clara
3	Placa de blindaje de metal, capacidad antimagnética, antiinterferencia
4 4	Función de protección completa, diseño de circuito de encendido anti-alto voltaje

Fuction	Range	Accuracy
DC voltage	4V/40V/400V/500V	± (0.5%+3)
AC voltage	4V/40V/400V/500V	± (1.0%+3)
DC	999.9mA/9.999A	± (2.0%+4)
AC	999.9mA/9.999A	± (1.0%+3)
Resistance	4Ω	± (1.5%+3)
	40Ω/400Ω	± (0.5%+3)
	4Ω/40Ω	± (1.5%+3)
Capacitance	20nF/200nF	± (10%+40)
	2uF/20uF/200uF	± (2.5%+20)
	2000uF	± (5%+10)
On and off	✔	
NCV detection	✔	
Frequency response in AC mode: 40Hz~1khz		

Product number	BST-58F
LCD	4000word
Range	automatic
Material	ABS-PCV
Sampling rate	3 times / sec
True RMS	✔
Data retention	✔
Screen backlight	✔
Flashlight lighting	✔
Low battery prompt	✔
Automatic shut-down	✔
parameter	
product weight	133g
Product Size	126*61*28mm
power supply	1.5V AAA battery*2
working environment	Remperature0~40°C Humidity<75%
Storage environment	Remperature-20~60°C Humidity<80%

AUTOMATIC
—INTELLIGENT MULTIMETER—

Product Usage

▼CHARACTERISTICS

This product is used for maintenance testing of various electronic products. It has metal shielding plate, anti-magnetic and anti-interference performance; full protection function, anti-high voltage ignition circuit design, automatic gear position recognition and more convenient operation.

Fuction	Range	Accuracy
DC voltage	4V/40V/400V/500V	± (0.5%+3)
AC voltage	4V/40V/400V/500V	± (1.0%+3)
DC	999.9mA/9.999A	± (2.0%+4)
AC	999.9mA/9.999A	± (1.0%+3)
Resistance	4Ω	± (1.5%+3)
	40Ω/400Ω	± (0.5%+3)
	4Ω/40Ω	± (1.5%+3)
Capacitance	20nF/200nF	± (10%+40)
	2uF/20uF/200uF	± (2.5%+20)
	2000uF	± (5%+10)
On and off	✔	
NCV detection	✔	
Frequency response in AC mode: 40Hz~1khz		

Product number	BST-58F
LCD	4000word
Range	automatic
Material	ABS-PCV
Sampling rate	3 times / sec
True RMS	✔
Data retention	✔
Screen backlight	✔
Flashlight lighting	✔
Low battery prompt	✔
Automatic shut-down	✔
parameter	
product weight	133g
Product Size	126*61*28mm
power supply	1.5V AAA battery*2
working environment	Remperature0~40°C Humidity<75%
Storage environment	Remperature-20~60°C Humidity<80%

PRODUCT INFORMATION

1KH true RMS
NCV induced voltage
AC and DC current
AC and DC voltage
Zero fire line identification
Resistance on and off

Specifically for the following problems

Can't read the symbol

Complex range

Don't know how to operate

Automatic identification within 3 seconds

1: Long press the yellow button to start the device

2: Automatic measurement of gear position

SCREEN BACKLIGHT
EASY TO READ

NCV Non-contact Test

Long press NCV to enter induction mode NCV sensing area

NCV sensing area

PRODUCT SIZE

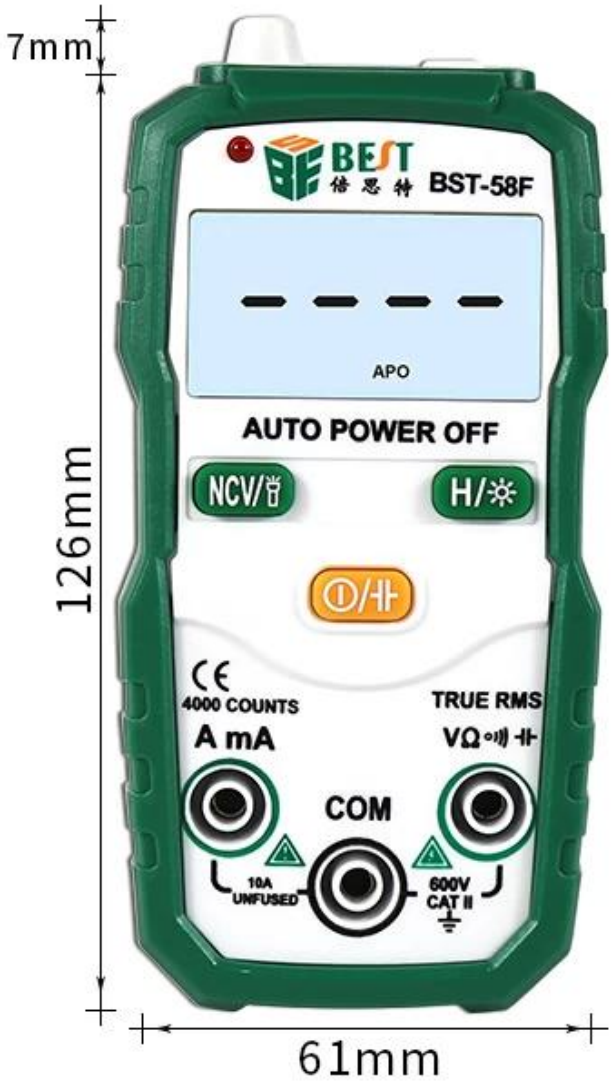

NCV test
LED light
Lndicator light
BEST
倍思特
BST-58F
Model
Case
Screen
APO
AUTO POWER OFF
Data Hold/
Backlight
NCV/LED
NCV/
H/
Power/
Capacltace
CE
4000 COUNTS
A mA
TRUE RMS
VΩ
Voltage, Resistance
Capacitance, Continuity
terminal
COM
Current
Terminal
10A
UNFUSED
600V
CAT II
COM

PRODUCT SIZE

On-off test

AC voltage test

DC voltage test

Capacitance test

Diode test

Resistance test