

Nombre: Mecha de soldadura de almacenamiento

Modelo: VB-1515B, 2015B, 2515B

Ancho: 1,5 mm, 2,0 mm, 2,5 mm

Longitud: 1,5 M

Característica:

☐ Cable ESD

☐ Alambre Flexible

☐ Alambre de Cobre Puro

☐ Ranura guía de alambre

☐ Posiciones de cables pegados

☐ Materiales de alta calidad

☐ Protección del Medio Ambiente

☐ Conductividad térmica rápida

☐ 2 cajas de espacio de almacenamiento pequeño.

VBEST

Storage type

Strong cleaning tin absorption line

STORAGE TYPE TIN ABSORBING TAPE

- Low residue
- Tin fast
- With storage



Small objects multi-purpose

Can accommodate all kinds of small screw parts


The countertop is clean and tidy,
and the parts are not lost.



Pure copper precision geometry


Shape woven

Greatly reduce the damage to the circuit board, heat
conduction on the tin fast performance is good

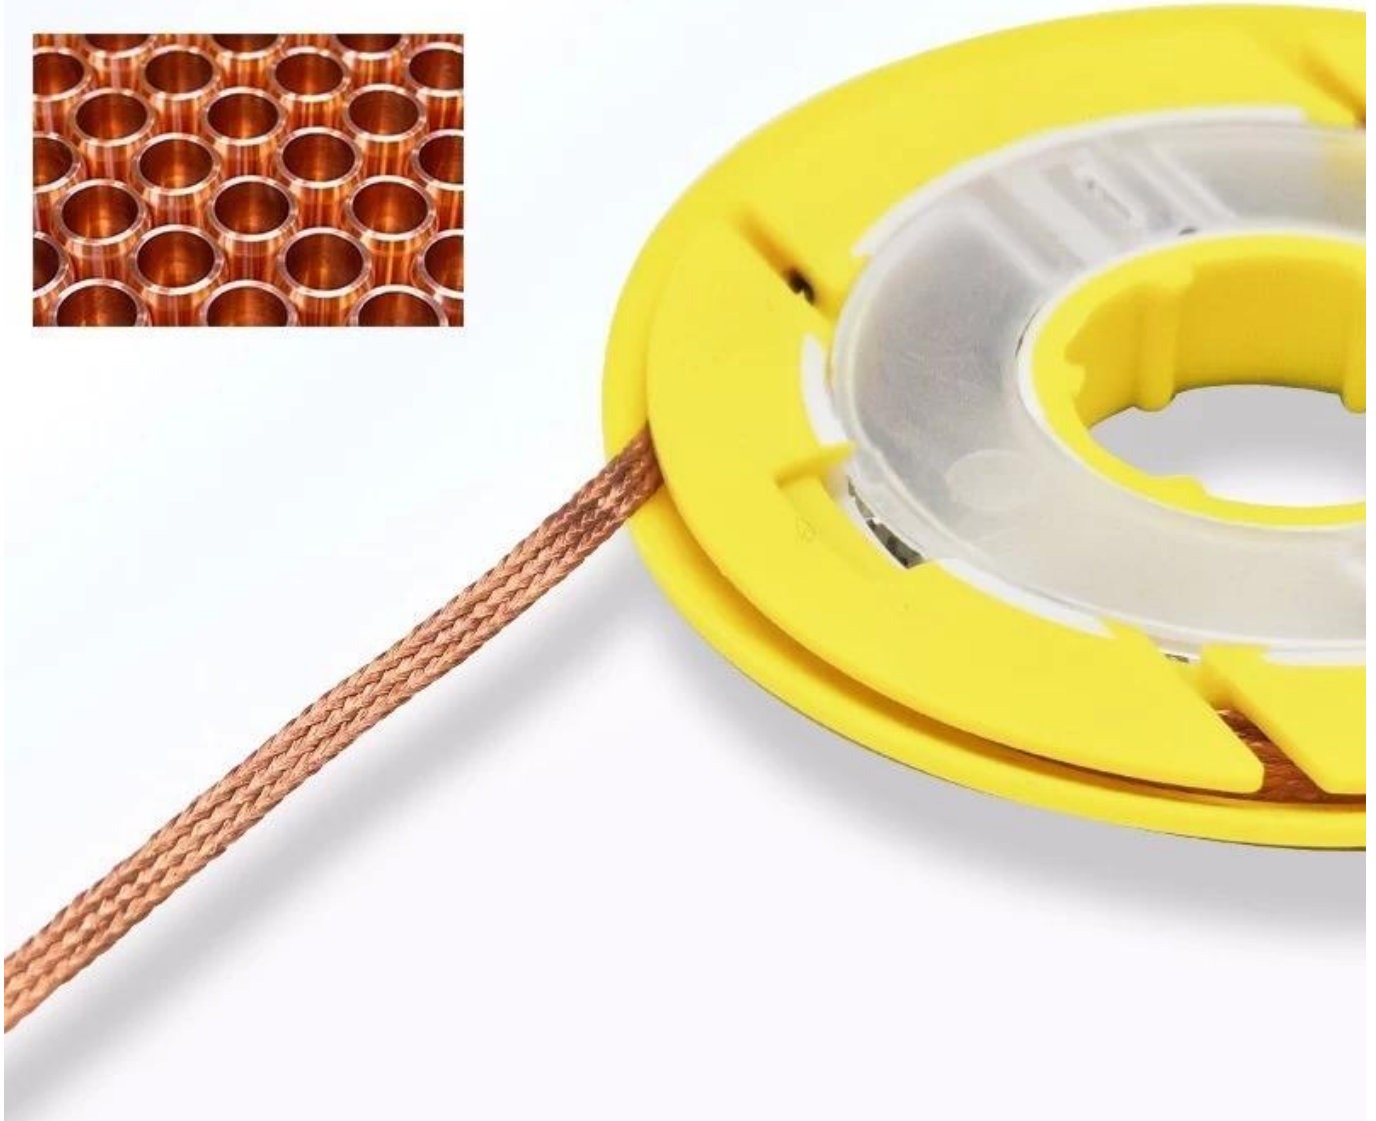

Low consumption and good absorption

New copper weave design, soft tin absorption tape, no second-hand copper, good absorption, use a small amount of tin absorption tape to remove more solder

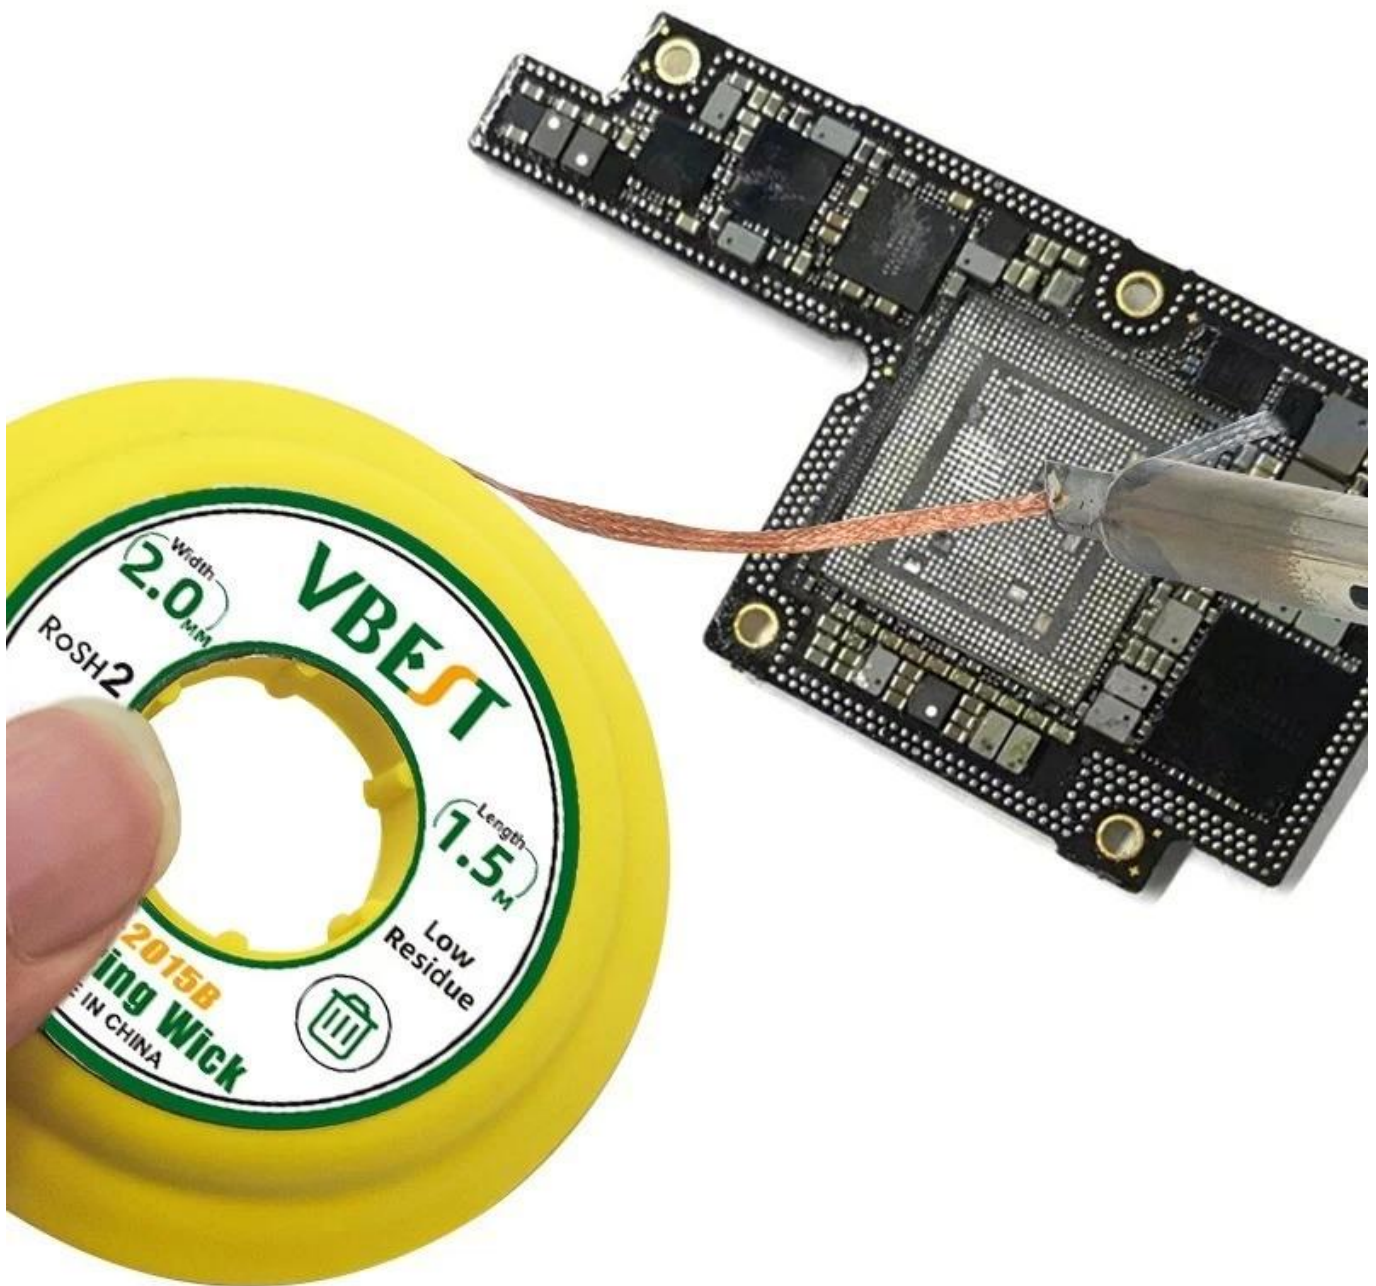

Product Parameters



Name	Model No.
Storage type solder wick	VB-1515B, 2015B, 2515B
Line warp Diameter	Length
1.5,2.0,2.5mm	1.5M
Weight G.W.	Size
13g	57*10mm

Multiple specifications

Applicable to all kinds of different suction tin scene



Strong cleaning low residue

The tin absorption belt contains Rosin, smooth tin dragging, good absorption and protection of components



Mobile phone Motherboard: absorb excess welding when removing tin

Tin, oxidation and corrosion resistance, thermal conductivity on tin

Can be good, tin absorption clean, in desoldering, core

After the chip is removed, there will be a large number of circuit boards.

The solder, which affects the soldering of the chip,

Usually clean with suction tin belt.

Product Parameters



Name	Model No.
Storage type solder wick	VB-1515B, 2015B, 2515B
Line warp Diameter	Length
1.5,2.0,2.5mm	1.5M
Weight G.W.	Size
13g	57*10mm