

Nom : outils de raccordement de fil de saut 3 en 1.

Modèle : BST-66

Joint de soudure de tampon : 2635 pièces/feuille

Longueur de l'aiguille : 100 mm.

Diamètre de la pointe de l'aiguille : 0,01 mm.

Taille du paquet: 61*115*13mm

G.W. : 30,7 g

Sharpness 0.01mm
Scraper needle Patch pad

Three-piece suit

PCB drop pad | Scrape, clear glue



Product Usage







Name	Three-piece pad + batch pin
Model	BST-66
Material	Handle: ABS Needle: stainless steel
Needle length	100mm
Needle tip diameter	0.01mm
Pad solder joint	2635 pcs/sheet
Land size	48 * 67mm
Package dimensions	61 * 115 * 13mm
G.W.	30.7g


Variety of solder tab shapes, many different specifications




Can adapt to different sizes of welding chassis on mobile phone motherboards





Needle tip diameter up to 0.01 mm
Can adapt to occasions requiring fine operation

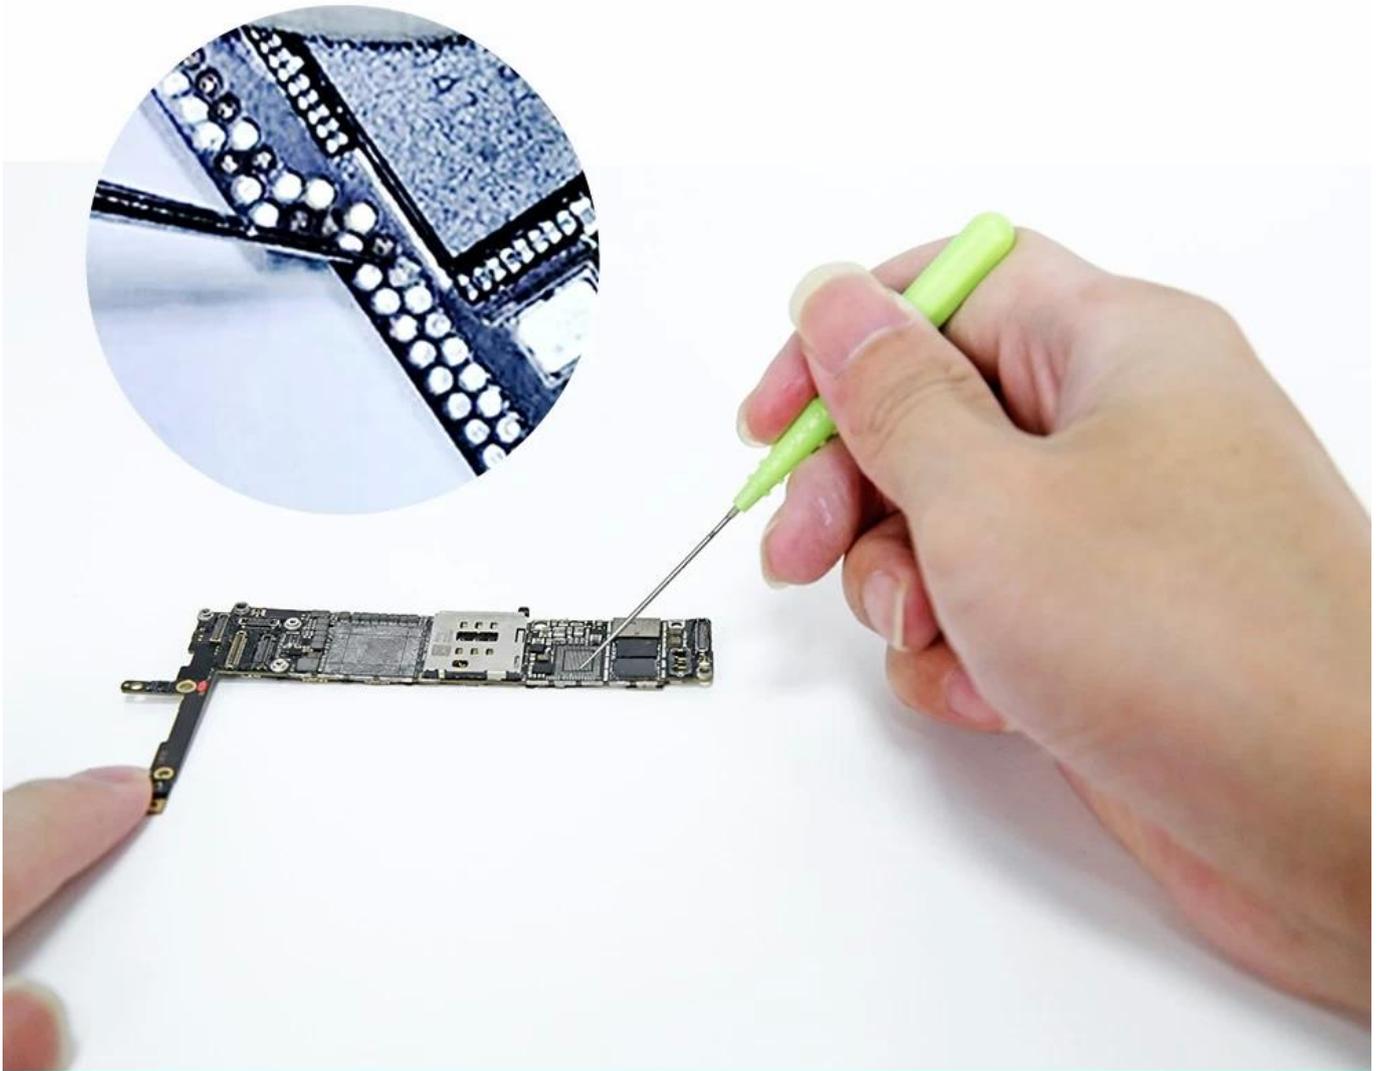

Product Pictures

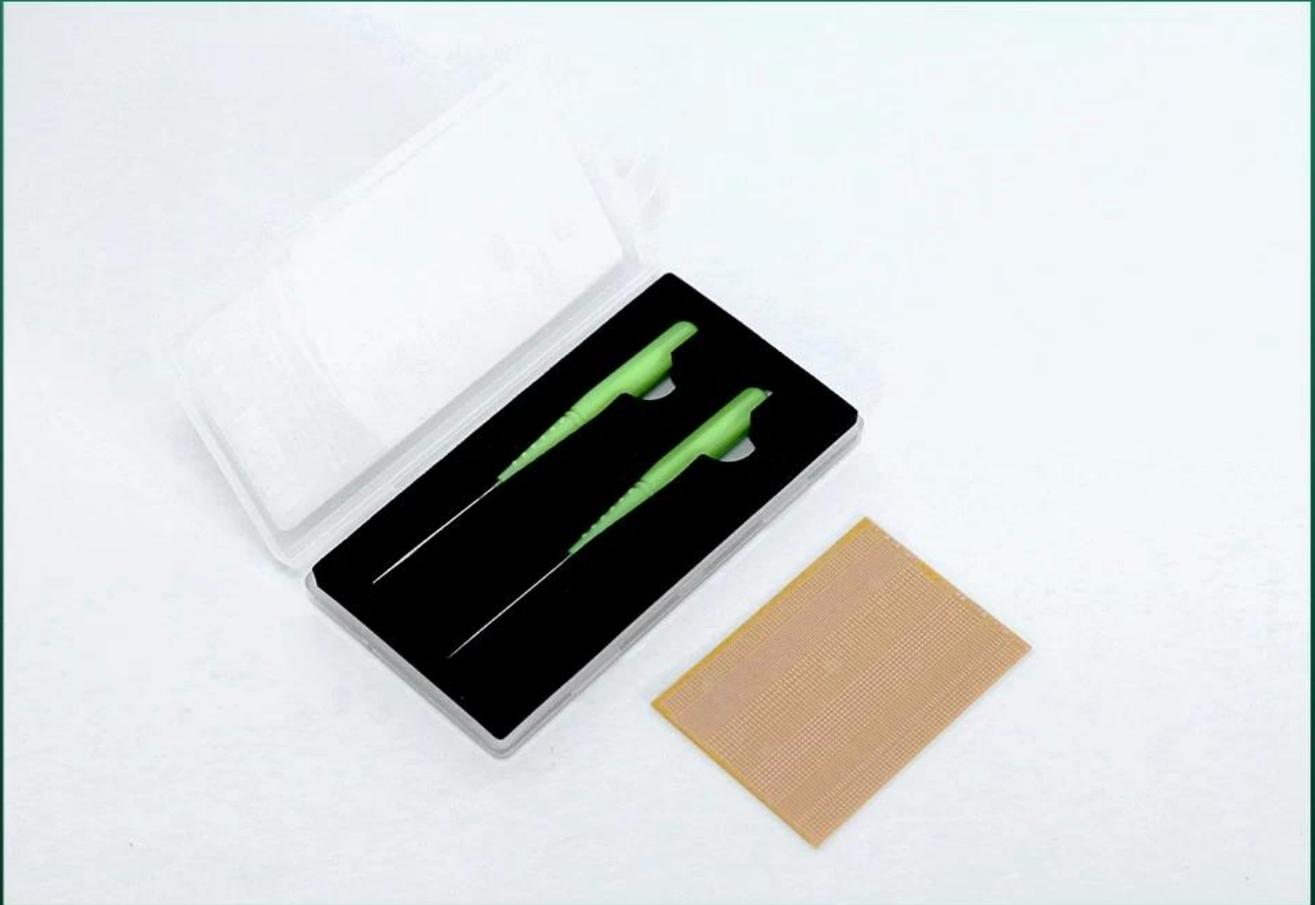

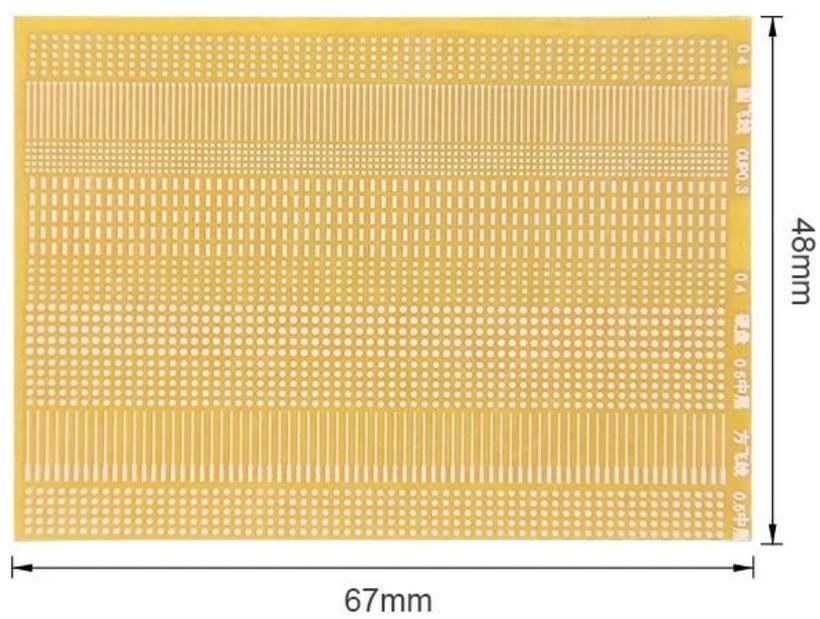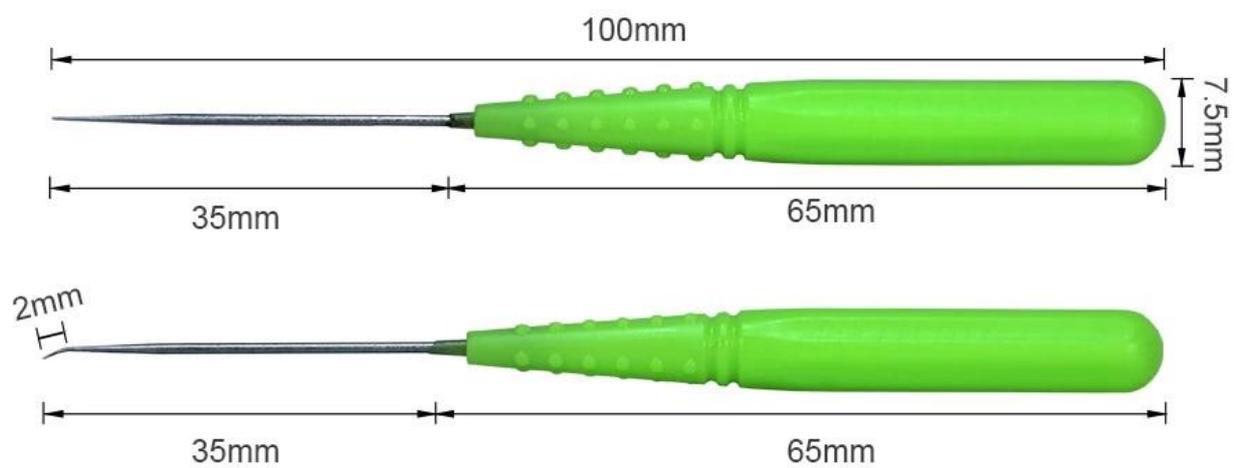


Application atmosphere




Remove residual glue

Repair point



Leather opening

Deep cleaning



Deep cleaning



Patchwork turn corner




OPERATION



Replace the traditional maintenance fly line

No trace of repair

Before repair → After repair

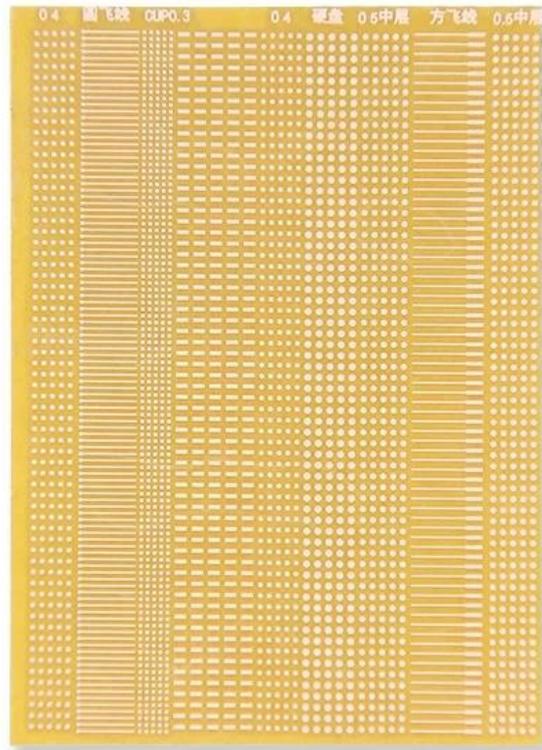

Product Dimension

G.W.:30.7g

