


Solnde





Four characteristics

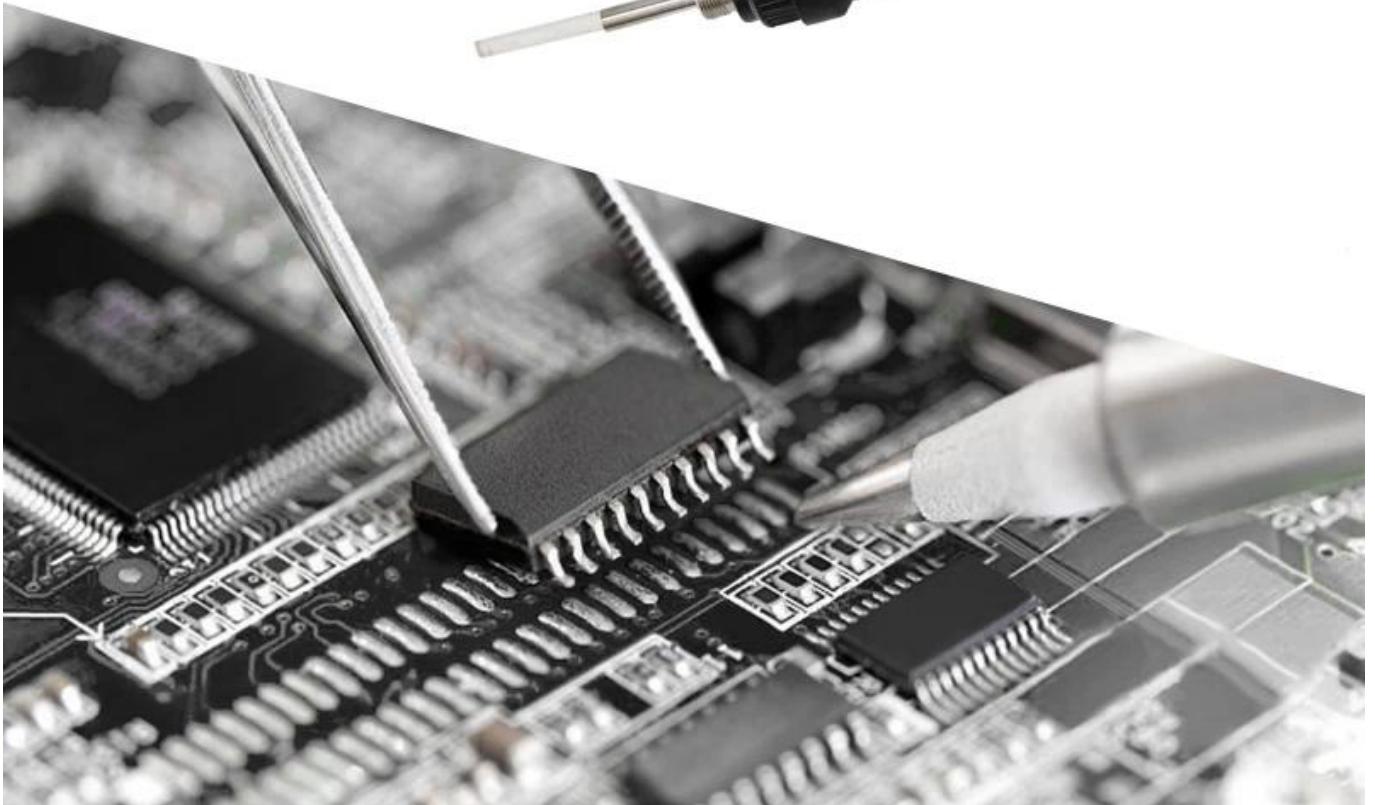

Ceramic heating element



Exact temperature




Heat up quickly



Use safety

Solnde

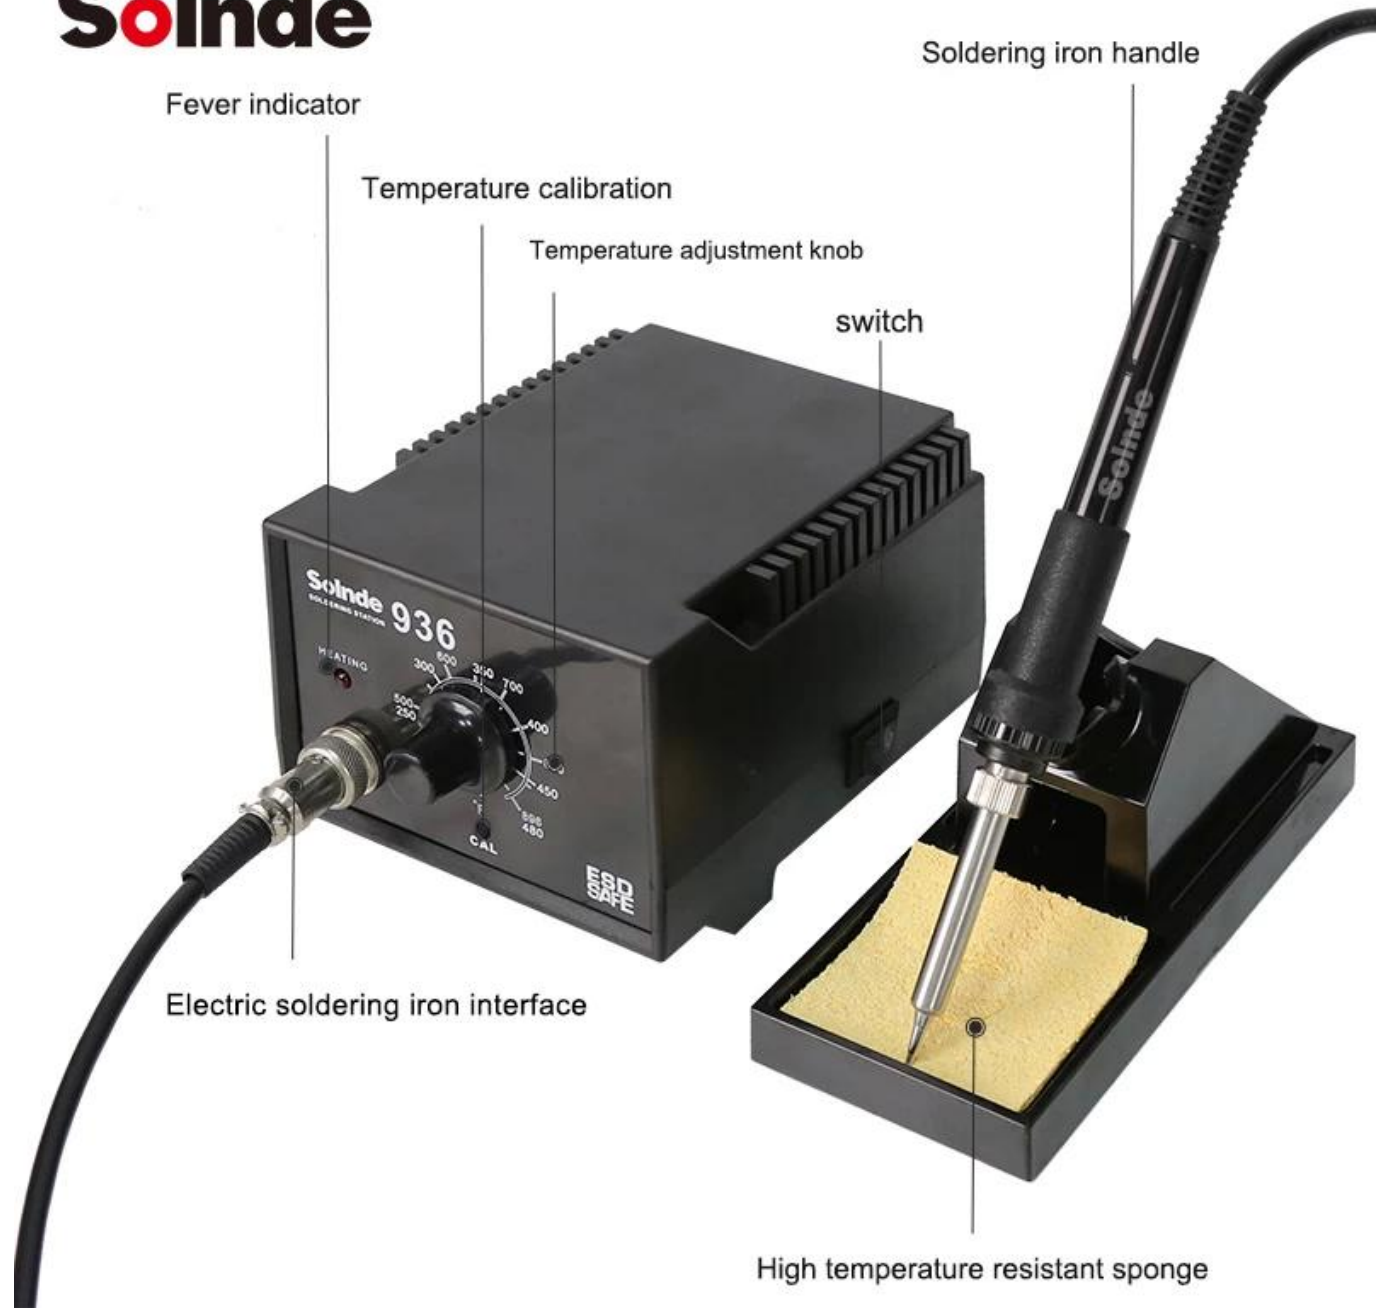

Solnde

Heat up quickly
Easy soldering





Product Usage



| | |
|---|-------------------------------|
| Model | SLD-936 |
| Power consumption | 60W |
| Body weight | 1.95KG |
| Input power voltage | 220VAC \pm 10% 50 HZ |
| Temperature control range | 200-480 ° C / 392 ° F-896 ° F |
| The output voltage | 24VAC |
| Setting method | Knob adjustment |
| Welding tip to ground impedance | $<2\Omega$ |
| Welding nozzle to ground voltage | $<5mV$ |
| Temperature stability of soldering iron | $\pm 2^{\circ} C$ |
| Heater | Ceramic heating element |
| Soldering iron | M-T-I tip |

Solnde

High temperature resistant shell

Non-slip thermal insulation silicone protective sleeve



SolInde



positive



side



bottom



back