




1. Le fil de soudure adopte 60% d'étain 40% de plomb, de 0,3 à 1,0 mm est disponible; bon mouillage, une bonne soudabilité
2. impureté Little, la capacité de diffusion bien
3. produits respectueux, ne polluent pas l'environnement.
4. La fumée est petite, moins d'éclaboussure
5. Utilisez la carte de circuit imprimé intensive



À souder dans la série de télévision, la radio ou les appareils ménagers normales
Réparation des appareils ménagers et des installations audio normales
Souder transpondeur radio, instrument et calculatrice et etc.

Description

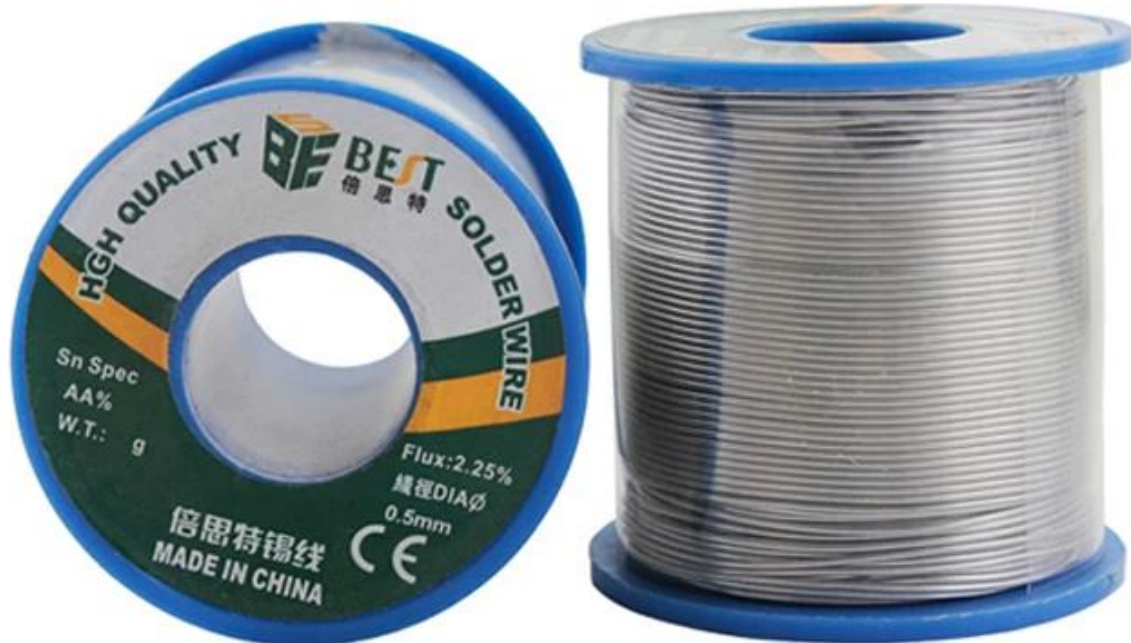

Name:	Soldering wire	Brand:	BEST
Ingredient:	60% Tin, 40% lead	Weight:	500g
Melting:	183-190 (°C)	Temperature:	280-320 (°C)
Specification:	Φ0.5mm、0.6mm、0.8mm、1.0mm		
Features1:	Good wetting, good solderability.		
Features2:	Fewer impurities, the proliferation of good adhesion		
Features3:	Less smoke, less spatter, environmentally friendly products		
Features4:	Increase production speed.Reduce production costs		
Features5:	To welding-intensive printed circuit board.		

Size

