

Features

1. Upholds high precision and great stability.
2. Values of voltage and current continuously are adjustable from zero to rated value.
3. Constant voltage and current are in automatic conversion; arbitrary point within the range will be made in determining the limits and conservation spot.
4. Voltage and current are displayed on digital LED at the same time.

Application

DC Power Supply is widely used in various environment such as institutions laboratories, automated test equipment, electronic test equipment, factory production line ect.

Specification

| Technical Specifications | |
|-----------------------------------|------------------------|
| Rated operating conditions | |
| Input Supply Voltage: | 110V/220V±10% 50/60Hz |
| Rated output voltage: | 0~30V |
| Rated output current: | 0~5A |
| Voltage display resolution: | 0.1V |
| Current display resolution: | 0.01A |
| Voltage display accuracy: | ±1%±1 word |
| Current display accuracy: | ±1%±1 word |
| Voltage ripple noise: | ≤1mVRMS(RMS) |
| Current ripple noise: | ≤3mVRMS(RMS) |
| Display: | Three half-LED display |

| Packing specifications | |
|-------------------------------|---------------------------|
| Body weight: | 4.75kg(With packaging) |
| The box size: | 35.5* 16.3 * 19cm |
| Packing size: | 51*47*41cm |
| Packing: | 6 sets |
| A carton weight: | 29.5kg |
| Fitting: | A manual, 220v power cord |

Product Show


PRODUCT DISPLAY



PRODUCT SIZE




PRODUCT DETAILS

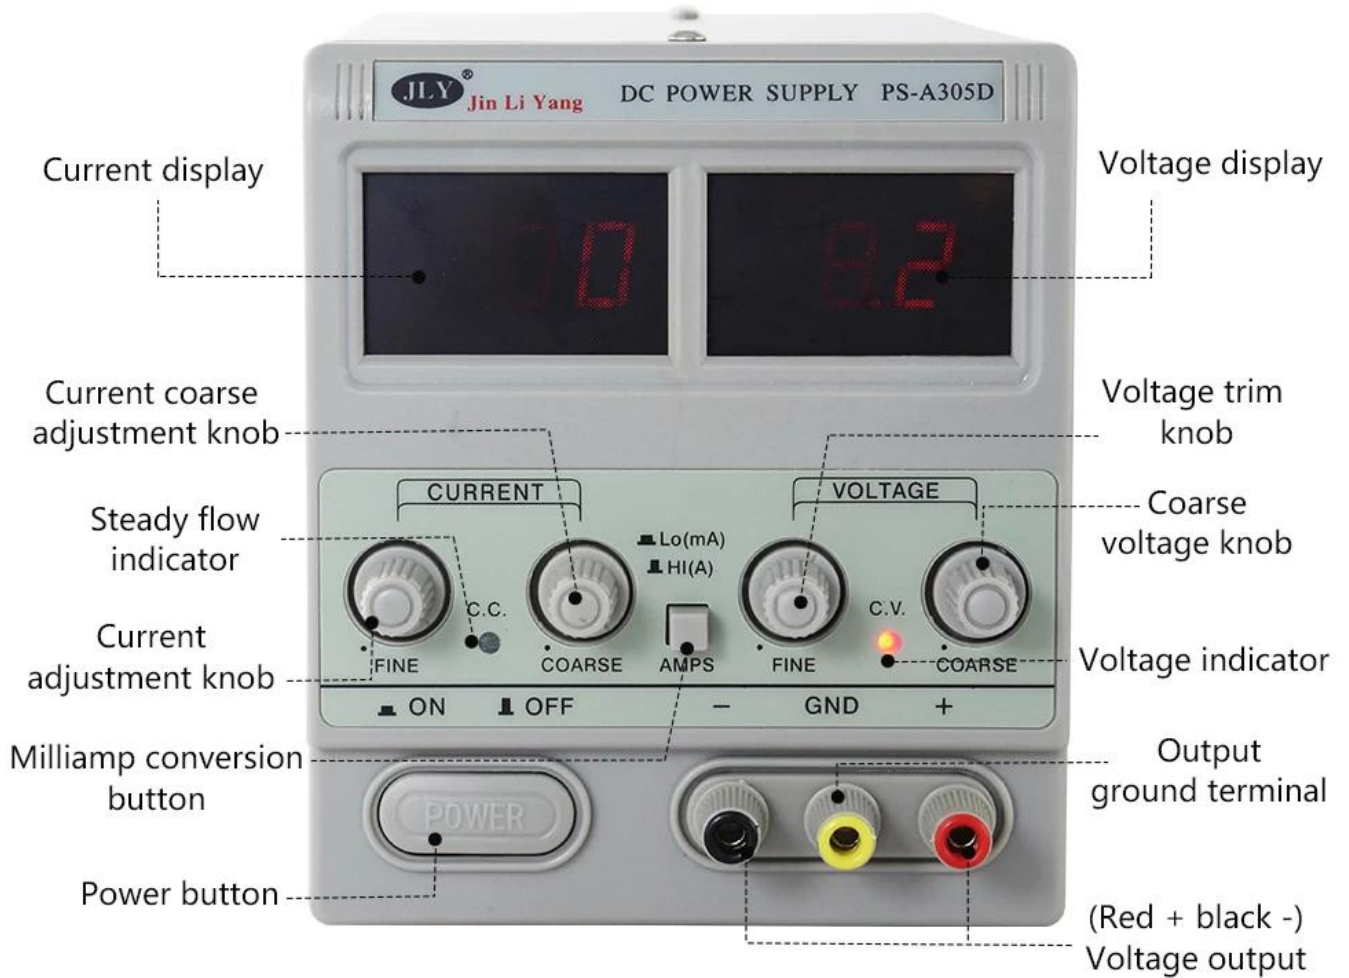



PRODUCT FEATURES

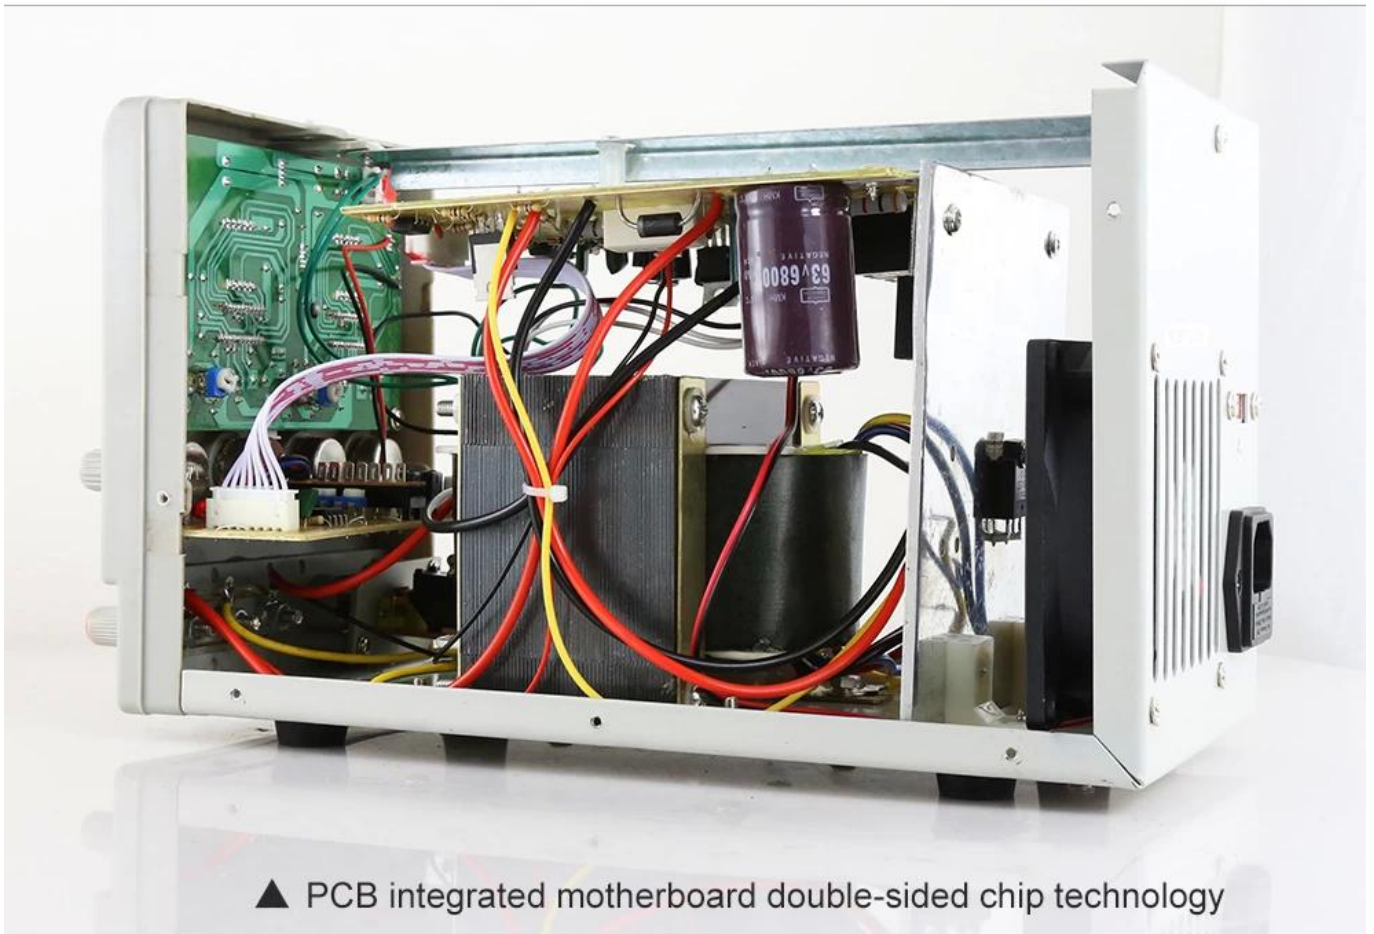

▲ PCB integrated motherboard double-sided chip technology

DC power supply

Product Model:BST-A305D

Wide range of uses: factory production lines, schools, maintenance department, dispatch, laboratories and other places

Product Features Introduction:

1. Work for a long time at full output power
2. Regulator, steady flow automatic switching
3. Lower ripple voltage
4. Freely selectable ground flow retention method to adapt to a wider range of use
5. With continuous adjustable output overvoltage protection, stronger protection of the load

PRODUCT PACKAGING

Weight:4.6KG

