

High-speed and accurate transmission

Banana head double head test lead

Withstand voltage 2000V/20A, soft silicone wire
thick copper wire, high temperature/freeze resistance



Freezing and high
temperature resistant



Bold copper wire



Anti
-break design



Fast transfer

Product parameters

Model	BST-040-JP	Product material	Beryllium Copper + Silicone
Name	Connecting line	Current and voltage	2000V/20A
line length	95cm	N.W	61g
Bus length	100cm	G.W	66.5g
Wire core material	Pure copper	Package Size	120x200mm

Wire Specifications

Conductor:

Specification	18AWG
structure	168/0.08AS
Diameter	1.35MM
length of lay	25MM

Insulating layer:

Thickness	0.6mm
Diameter	2.6±0.05mm
Material	Silicone

Covering layer:

Thickness	0.6mm
Diameter	3.8±0.1mm
Material	Silicone

Wide range of applications


Connection Test Calibration

Suitable for various test, connection calibration value and other application scenarios



Bold pure copper wire

High-quality materials cast good quality, copper wire is more accurate, double-layer protective rubber sleeve

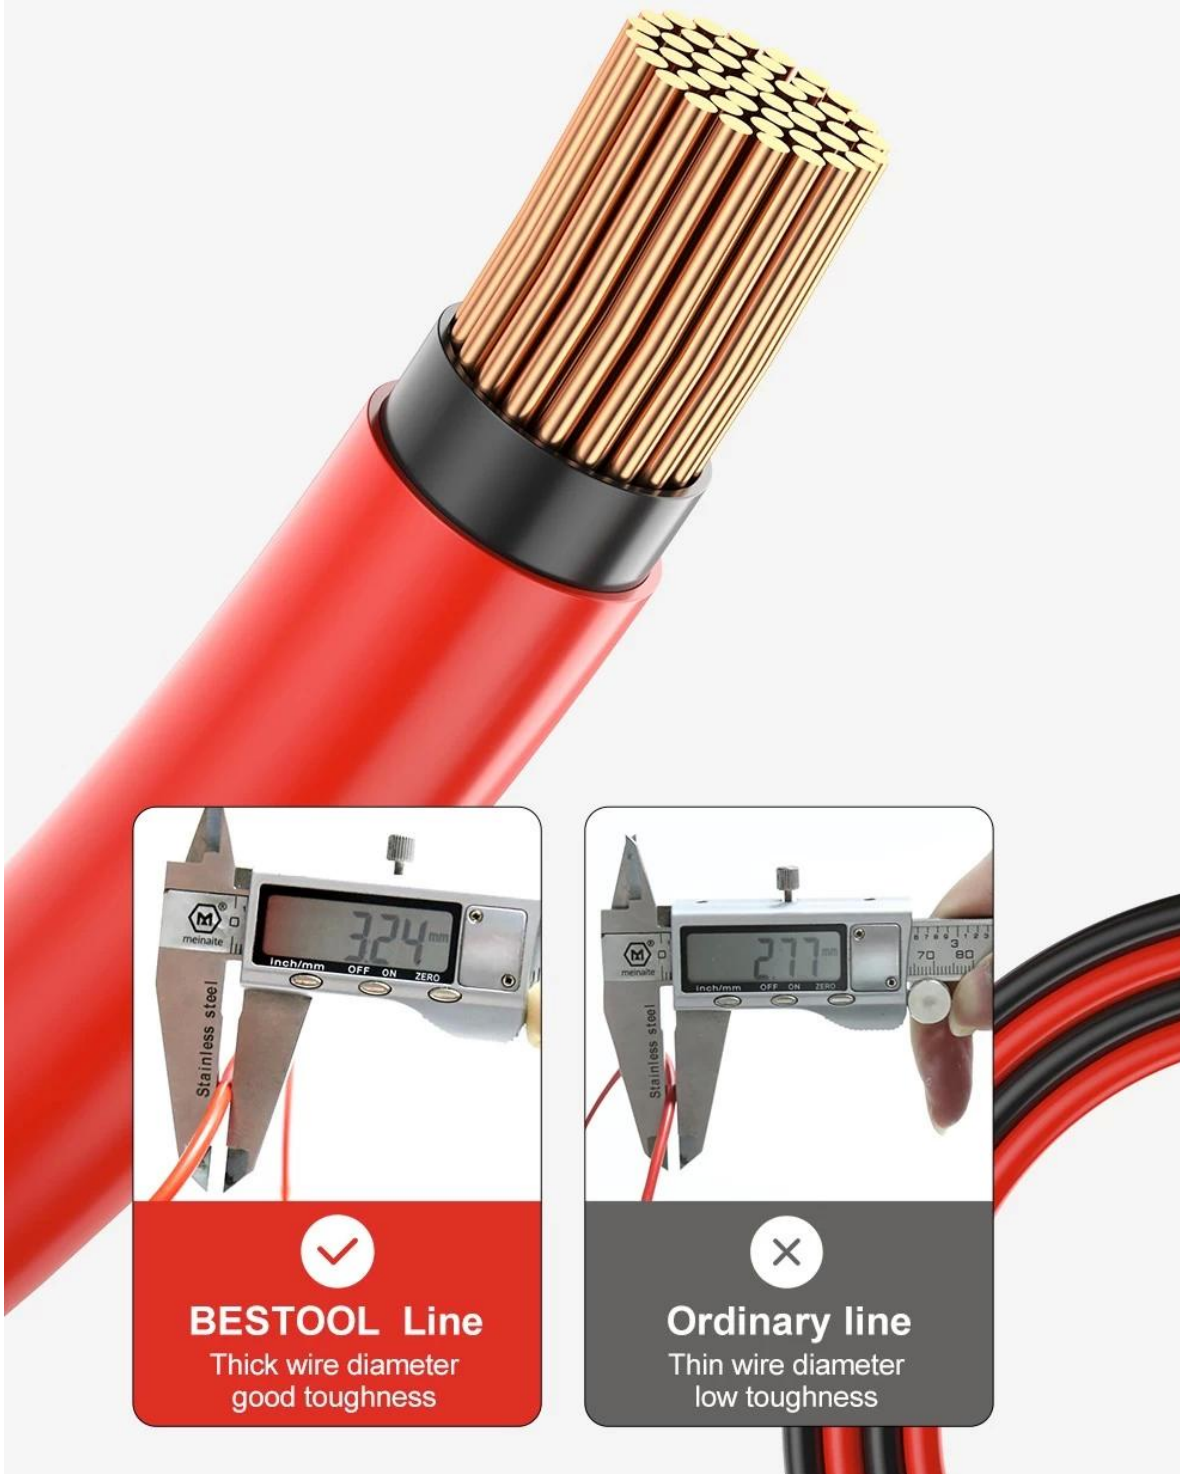

BESTOOL Line

Thick wire diameter
good toughness




Ordinary line

Thin wire diameter
low toughness

High/low temperature resistant soft PVC wire

High-quality materials, anti-freezing and anti-burning suitable for various operating environments

Low temperature resistant to -50°C



High temperature
can withstand 200°C

Strong flexibility

Soft silicone wire material, anti-break design


Adopt soft plastic injection process, soft and not easy to break, strong tensile strength



Wide range of compatibility

New upgrade lotus plug

Firmer when plugging and unplugging, dustproof and insulating sheath

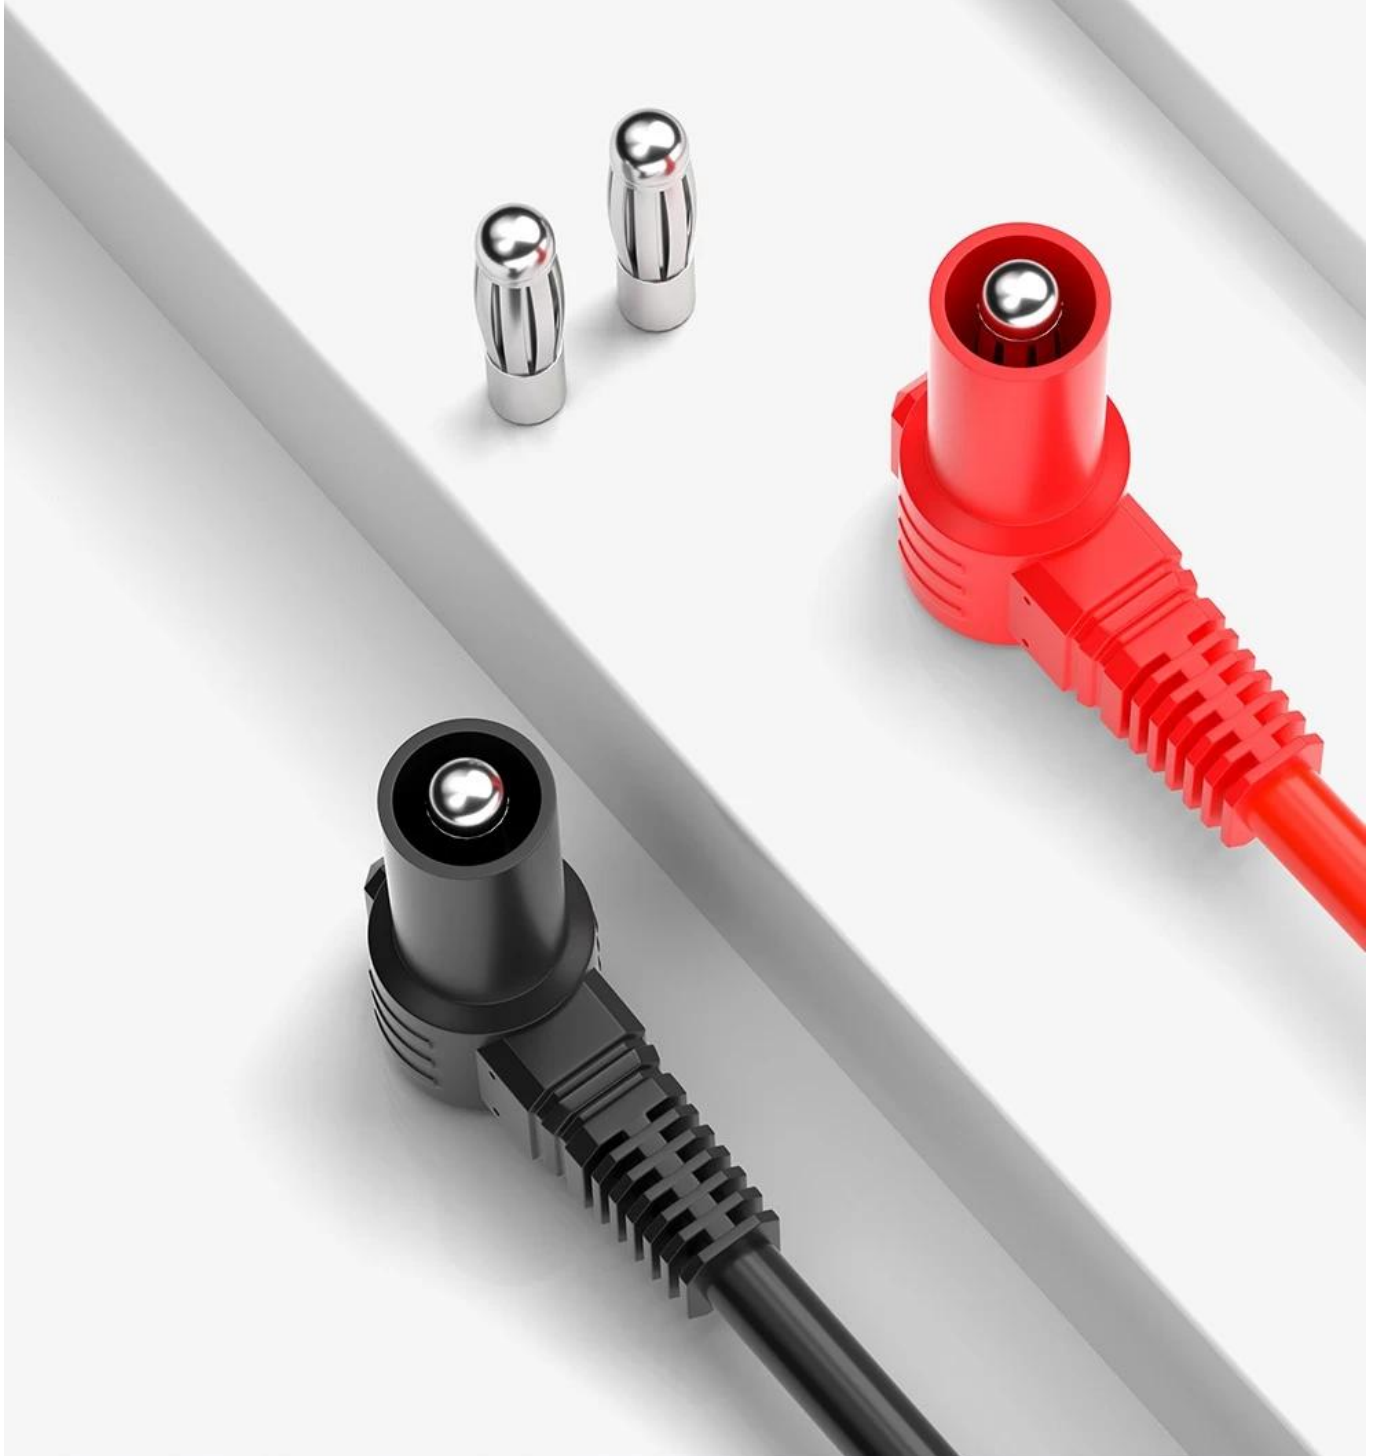

Product dimensions



Line length 95cm

Total line length: 100cm

Product packaging

