

APPLICABLE TO A VARIETY OF MOBILE PHONE TYPES

# Rotary Phone Screen Separator

Multi-purpose machine Detachable mobile phone with straight screen /  
curved screen / frame removal / frame / conventional separation





Simple operation



Precise  
temperature control



Strong suction



Rapid heating



Built-in air pump



Intelligent  
digital display

# PRODUCT PARAMETERS



Model	BST-918B
Name	Rotary Phone Screen Separator
Material	Aluminum alloy
Gross	3.5kg
Power	400w
Voltage	AC220V/240V 50/60HZ
Heating mode	PTC heating sheet
Scope of application	Within 7 inches
Product Size	235*275*155mm
Adjustable temperature	0-130°C



# Sloping design




Left and right tilting design can prevent the liquid from flowing into the phone and hurting the cable



# 360° free rotation



Built-in high-precision bearing, rotation without dead angle

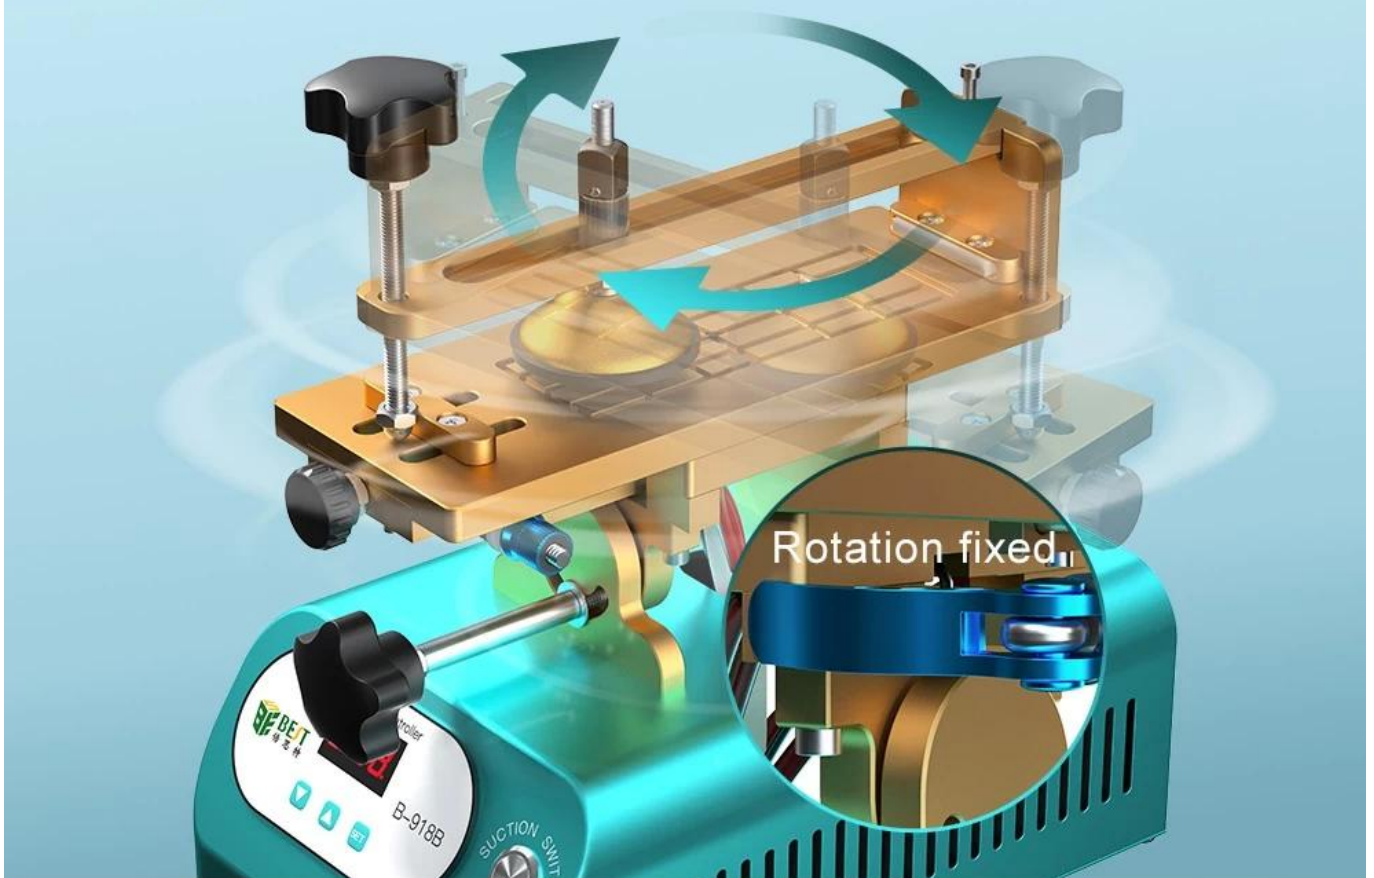

# Built-in dual air pump



The heating panel adopts one-piece molding process  
Groove seal design, with double pump, stronger suction



# All aluminum heating plate

...

Special heating aluminum material, uniform heating, safer and energy saving

Adjustable temperature: 0-130°C




---

## The machine can be fixed for more stable use



There are metal sheets and screws on both sides to fix the machine, making the operation more stable

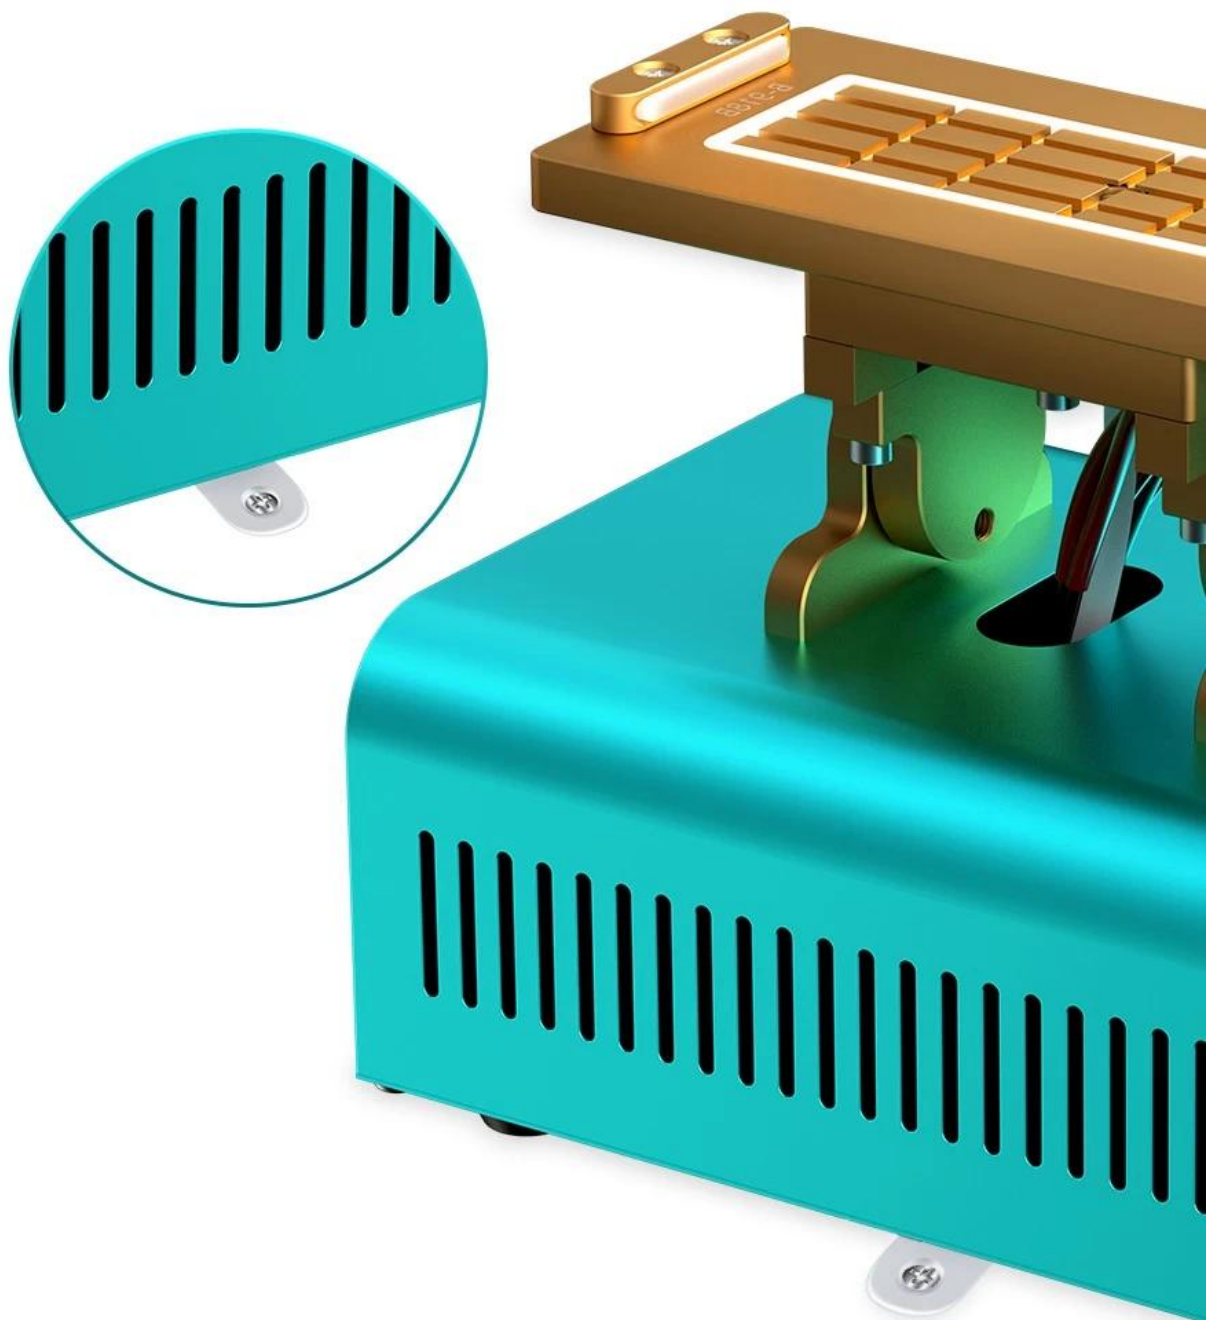




# Aluminum plate silicone pad




Increase the adsorption force of the aluminum plate to make the vacuum suction more stable

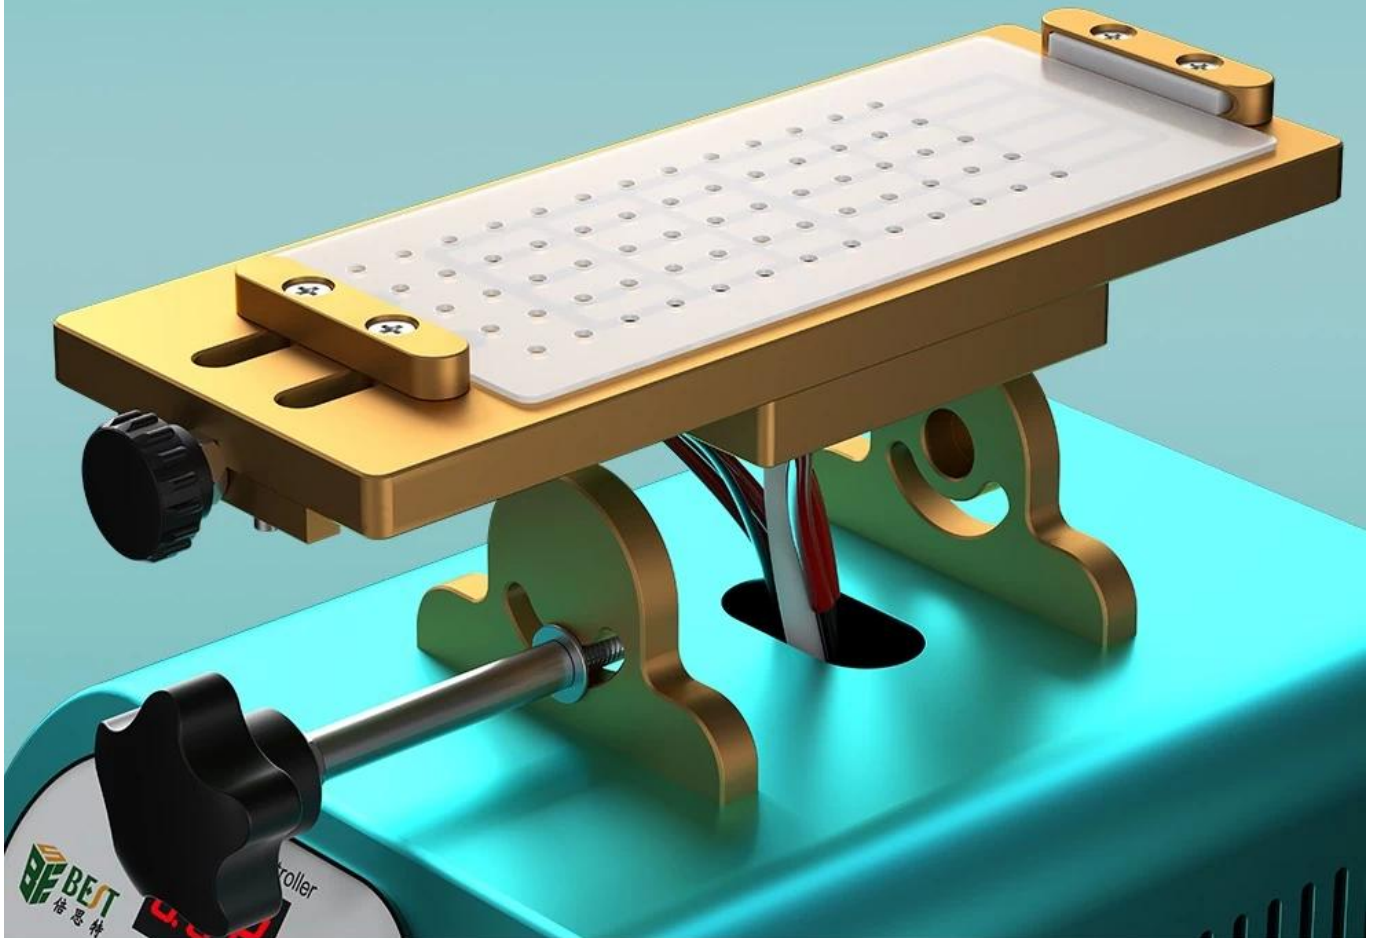

## Cooling holes on both sides

Heat dissipation holes on both sides effectively reduce the internal temperature of the fuselage

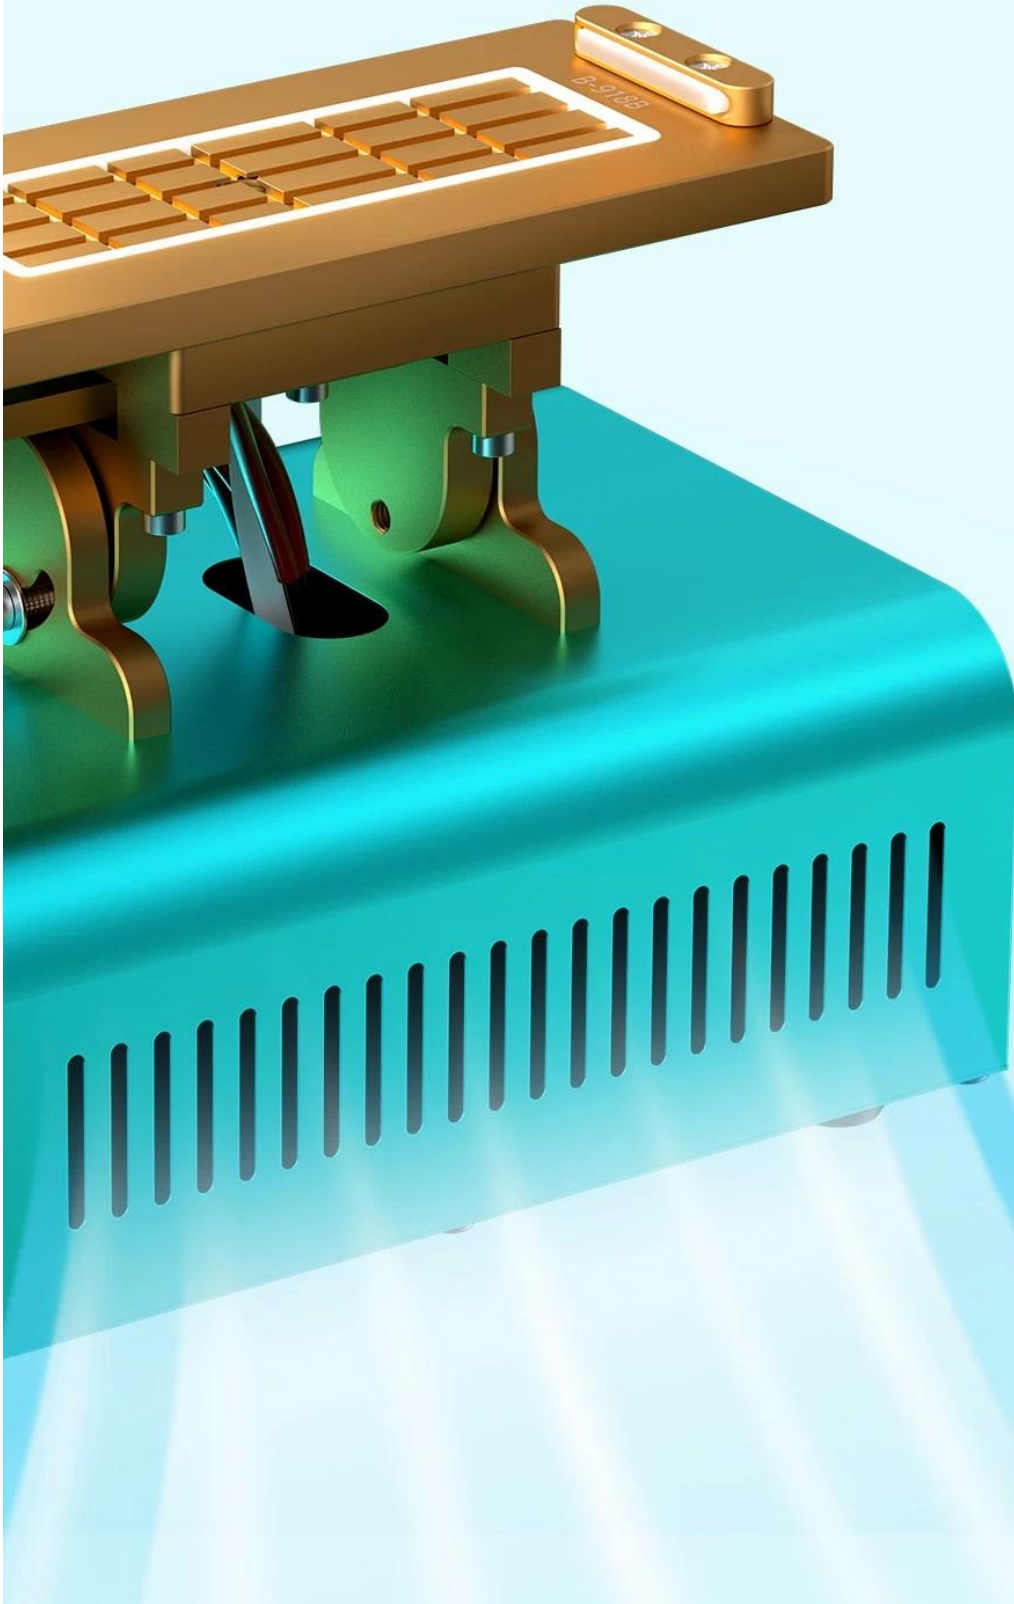

**Powerful suction cups to  
easily disassemble the screen**

Scope: 7-inch screen



# Extensive operation




The bracket can be removed, which can be used for various screen separations, and the cutting is smooth.

Scope: 7-inch screen



# Separator product analysis

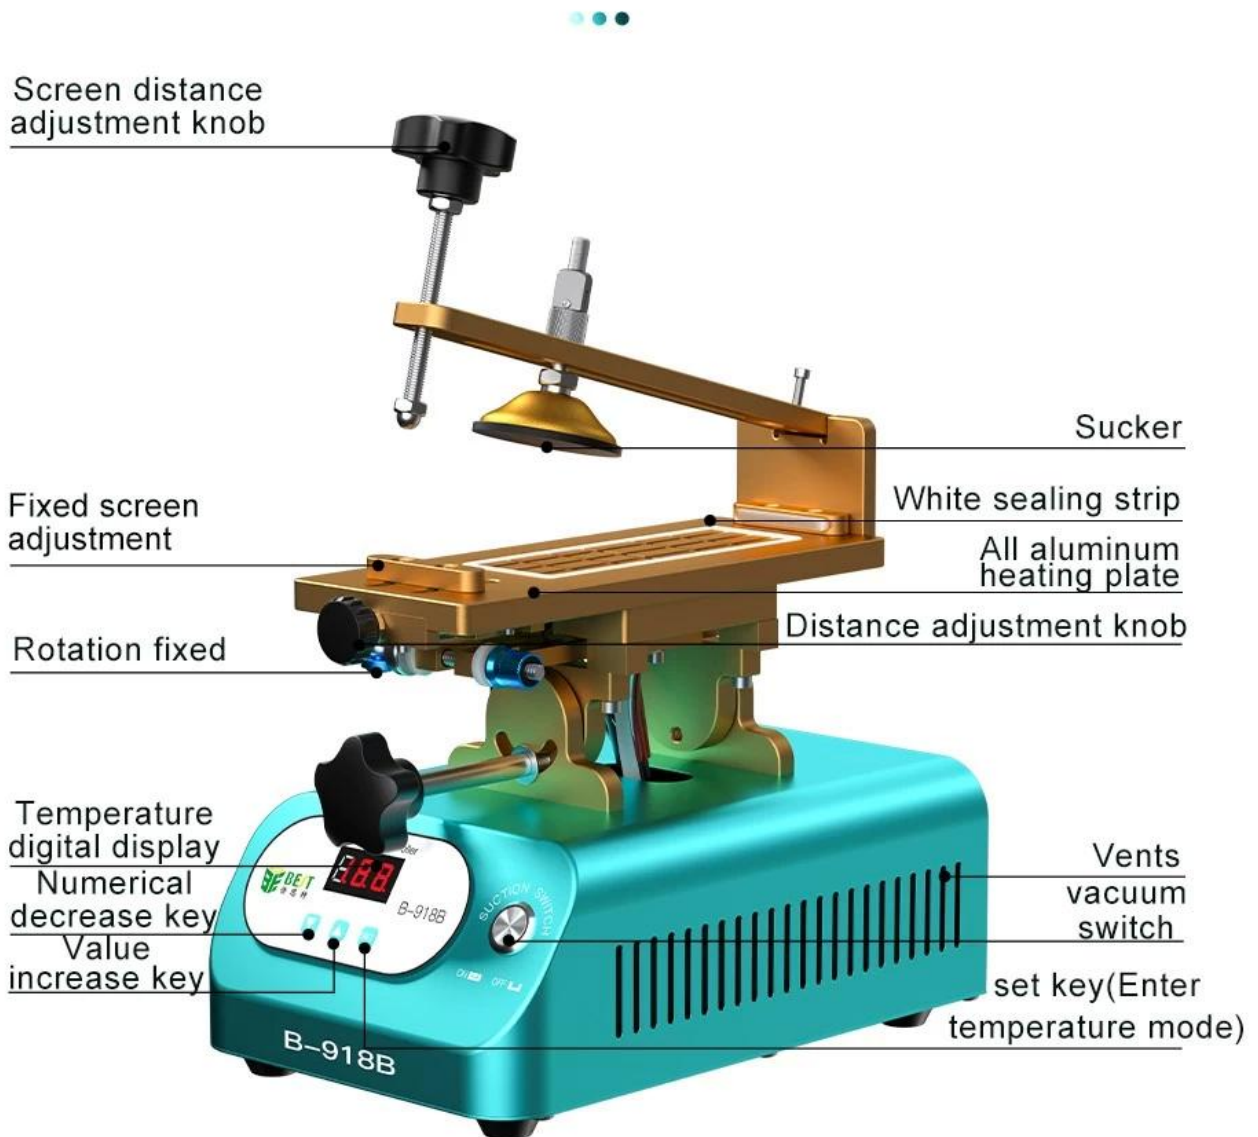

## INSTRUCTIONS

Press the "SET" button, the display number flashes to enter the temperature preset mode, press "▲" Or "▼" key to adjust the temperature up and down, preset the temperature and "SET" key to confirm.


### Tips:

When setting the temperature of the machine, it is recommended that the temperature be preset to 80°C. Too high temperature may damage the screen.


Fixed bracket knob

Switch

Power interface

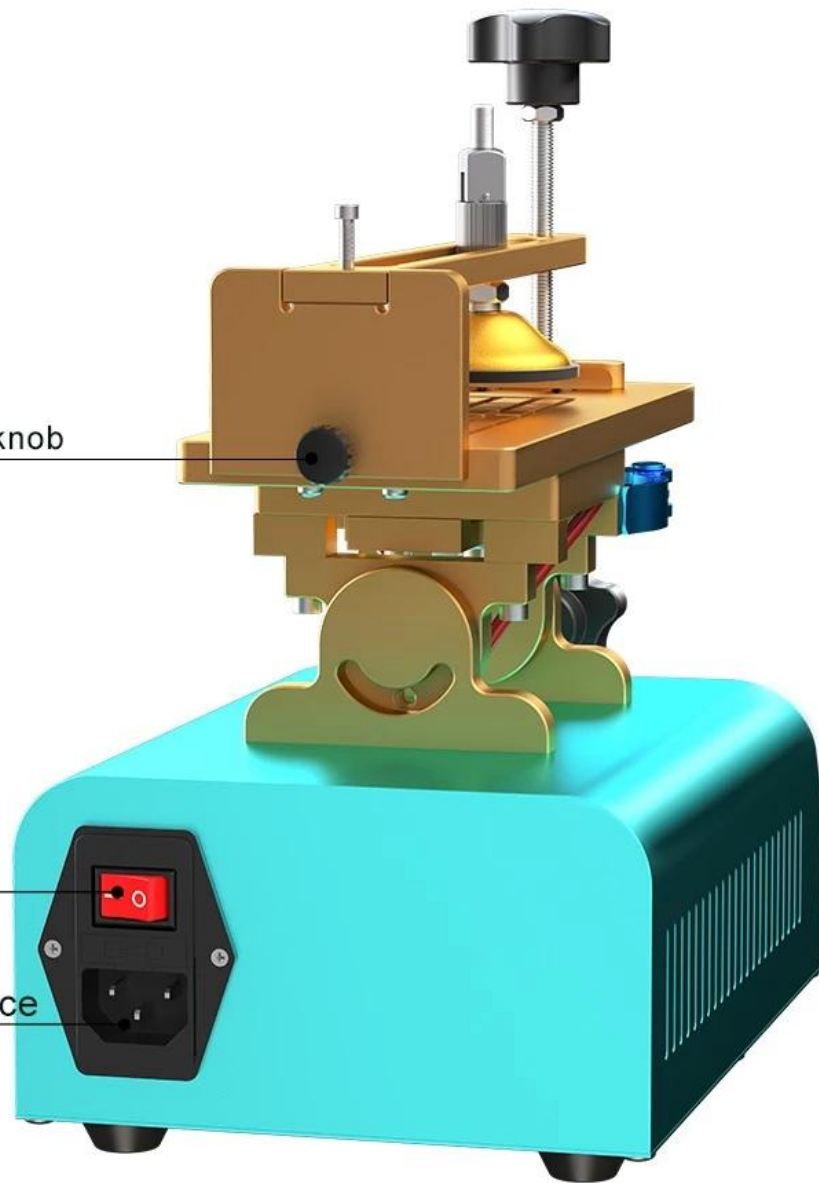

# Product Size

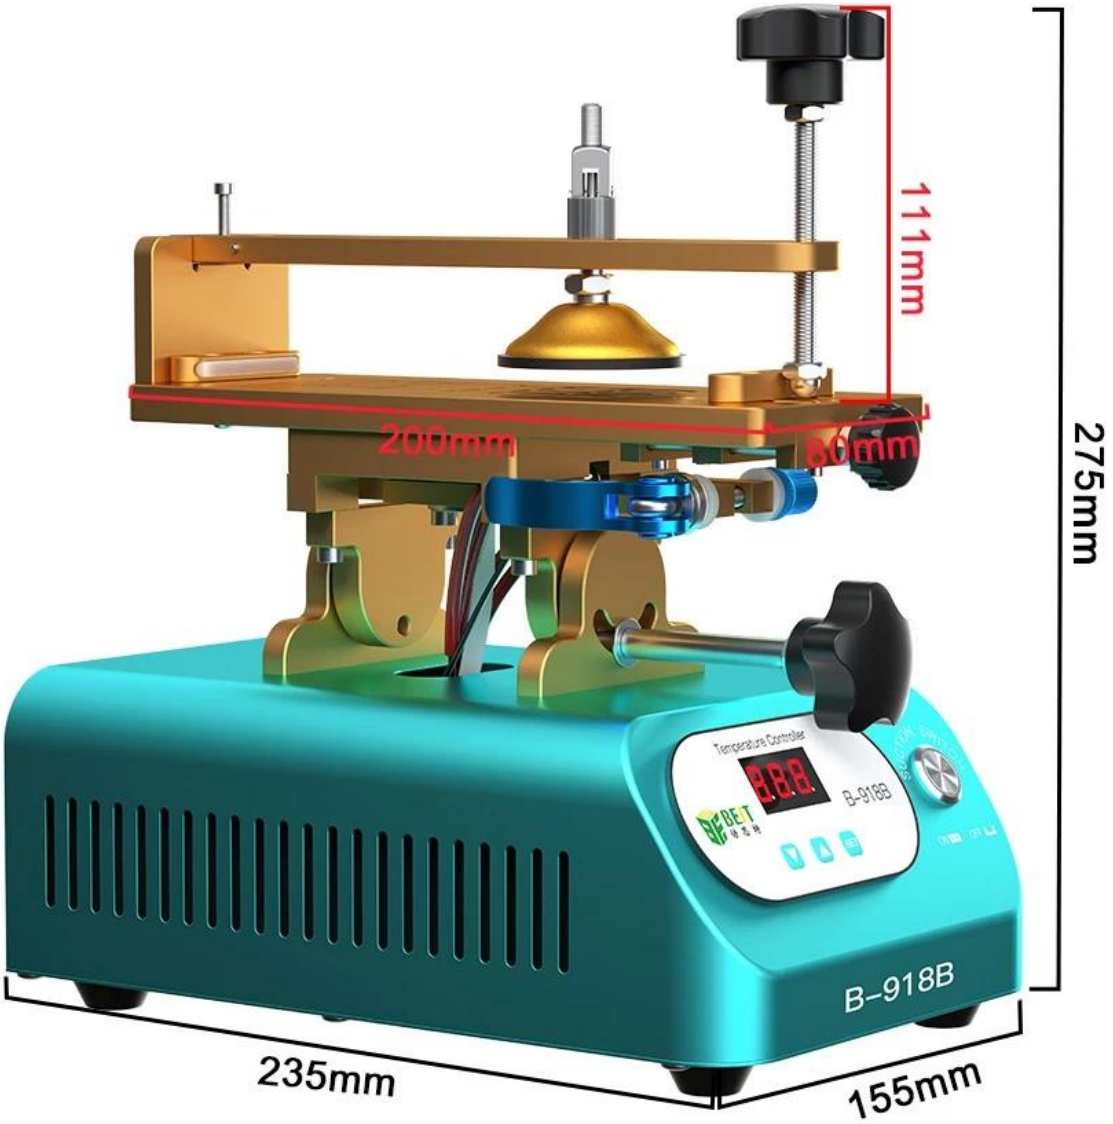

# Product details



BST-918B host, sealing strip



Open screen  
bracket, silicone pad



Power cord



Desktop Fixing Accessories