

Quang & G. (2010) Esb. à l'ing. (arr. o.)

Descrizione del prodotto


PRODUCT DISPLAY



PRODUCT SIZE



PRODUCT DETAILS

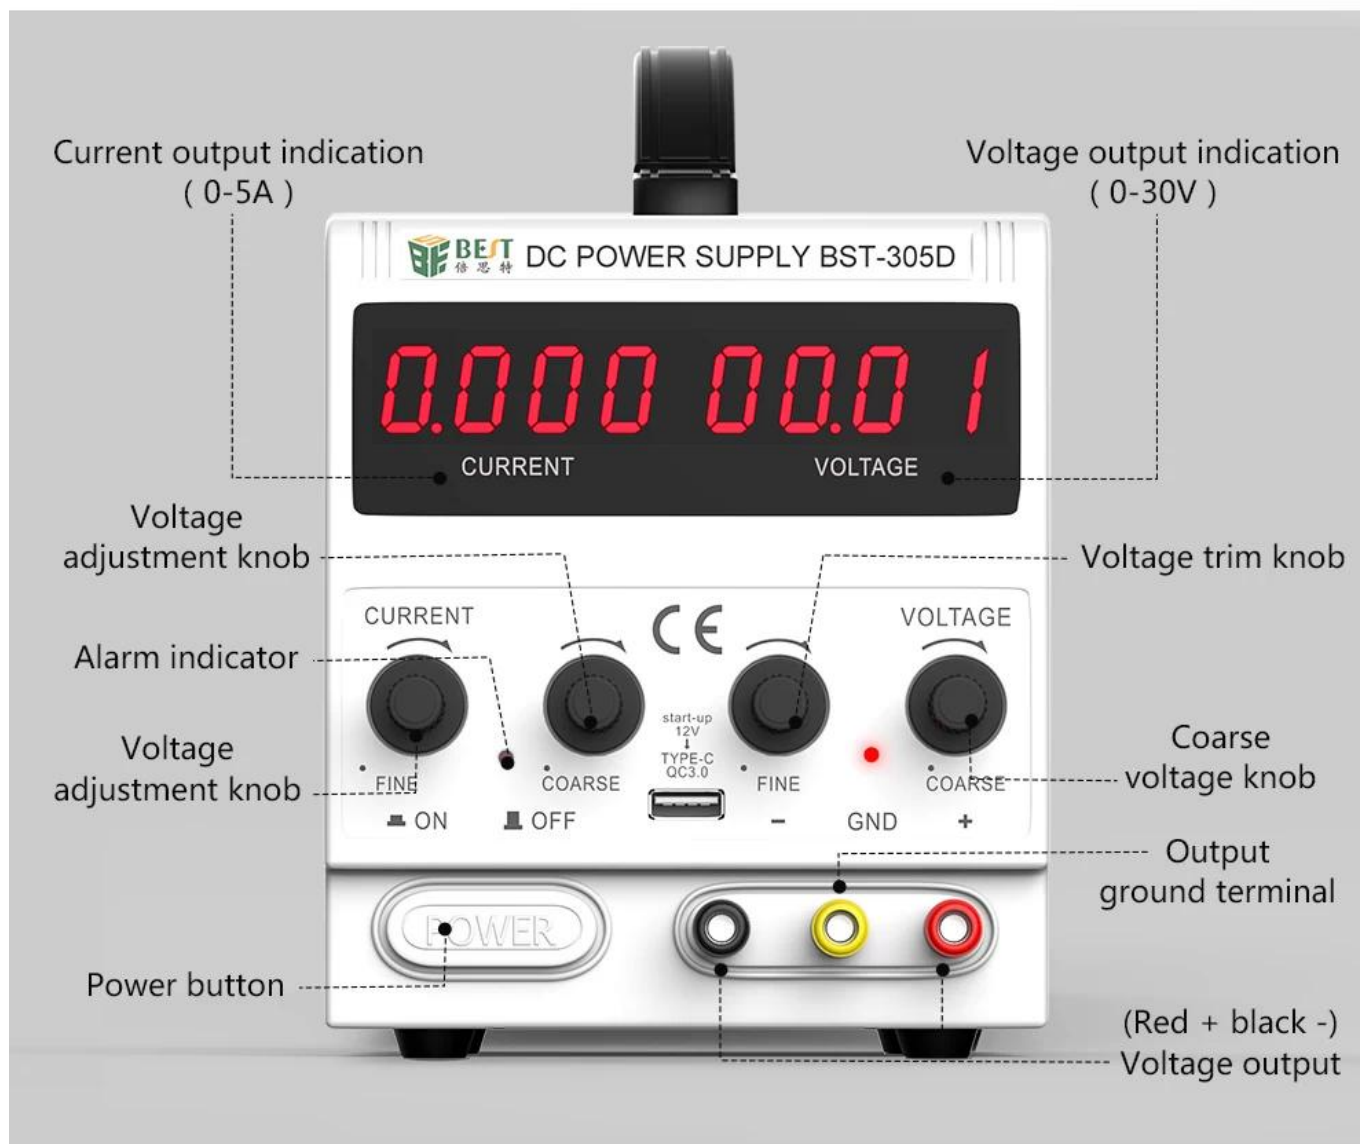



DC POWER SUPPLY BST-305D

0.000 00.01

CURRENT

VOLTAGE

4-digit display high precision

Current output: 0-5V

Voltage output: 0-30V

8 USB ports

It can simultaneously load up to 7A current shunt output, data upgrade, and test.



Please keep the vent unobstructed and at least 5 cm away from the shelter.
请保持散热口畅通，与遮挡物间至少有5厘米距离！

离！



110V/220V
SWITCH



110V and 220V switching

Portable Handle



PRODUCT PHOTOGRAPH



Specifications

model	PS-305D	output voltage	0-30V
Body weight	4.75KG	output current	0-5.0A
Dimensions	125MM*223MM*145MM	Storage Humidity	<80%
Power	1-50W	Voltage accuracy	0.1V
Input Voltage	AC 220/110V 50/60HZ	Current accuracy	10MA
Storage Enviromment	-20°C-80°C	Working Enviromment	-10°C-40°C

Display digitale 1.LED;
2. Alimentatore CC regolabile ad alta precisione;
3. Preciso circuito elettronico per ottenere prestazioni stabili;
4.Cell batteria del telefono ricarica veloce, non facile da danneggiare la batteria al litio;
6. Protezione di cortocircuito, sistema di recupero automatico;
8. Coefficiente riduttore di corto circuito e controllo di sovracorrente nel tempo;