Nome: microscopio stereo binoculare
Modello: BST-X65
Ingrandimento: 6,5x-65x
Dimensioni dell'area di lavoro: 310 * 258 mm
Peso lordo: 5,09 kg
Dimensioni confezione: 385*330*225 mm

Dedicated to maintenance inspection. Binocular stereo microscope

Naked eye 3D effect, binocular diopter adjustable large maintenance work stage

A combination of advantages

Six characteristics

6.5-65 continuous doubling

Continuous zoom

Hd objective

HD Objectives

24mm field of view

24mm field of view range

LED adjustable light

LED adjustable light

3D naked eye

3D naked eye

360° rotation

Rotate 360 degrees

Observed height :110mm
WD
Working distance
Observation height :100mm
Field of view :24mm
Eyepiece range
Field of view :20mm
6.5 times. -65 times
Adjustable magnification
Continuous doubling
7 times to 45 times
Adjustable magnification
VS

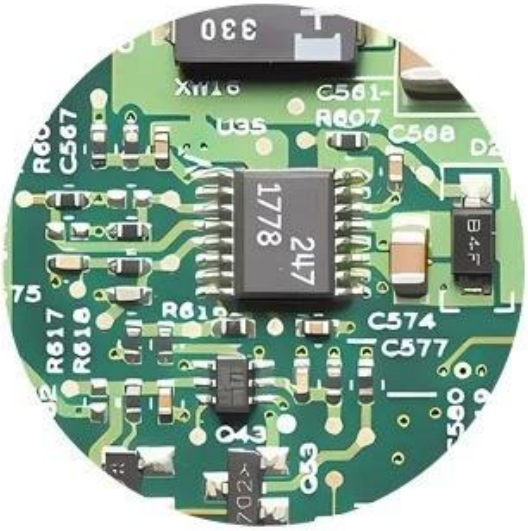

Wide-angle eyepiece observation effect. Wider view, bright and comfortable observation

Ordinary eyepiece observation effect. Narrow visual field, dark observation, easy visual field fatigue

High eye point: The eye distance from the eyepiece can also see the scene in the eyepiece, not only back. Look comfortable and suitable for people wearing glasses

It can be adjusted according to the different visibility of the two eyes to achieve the effect of clear eyes

Continuous zoom focus

Fine-tune the 0.65-6.5X continuous magnification knob, combined with the focusing handwheel for fast and clear imaging

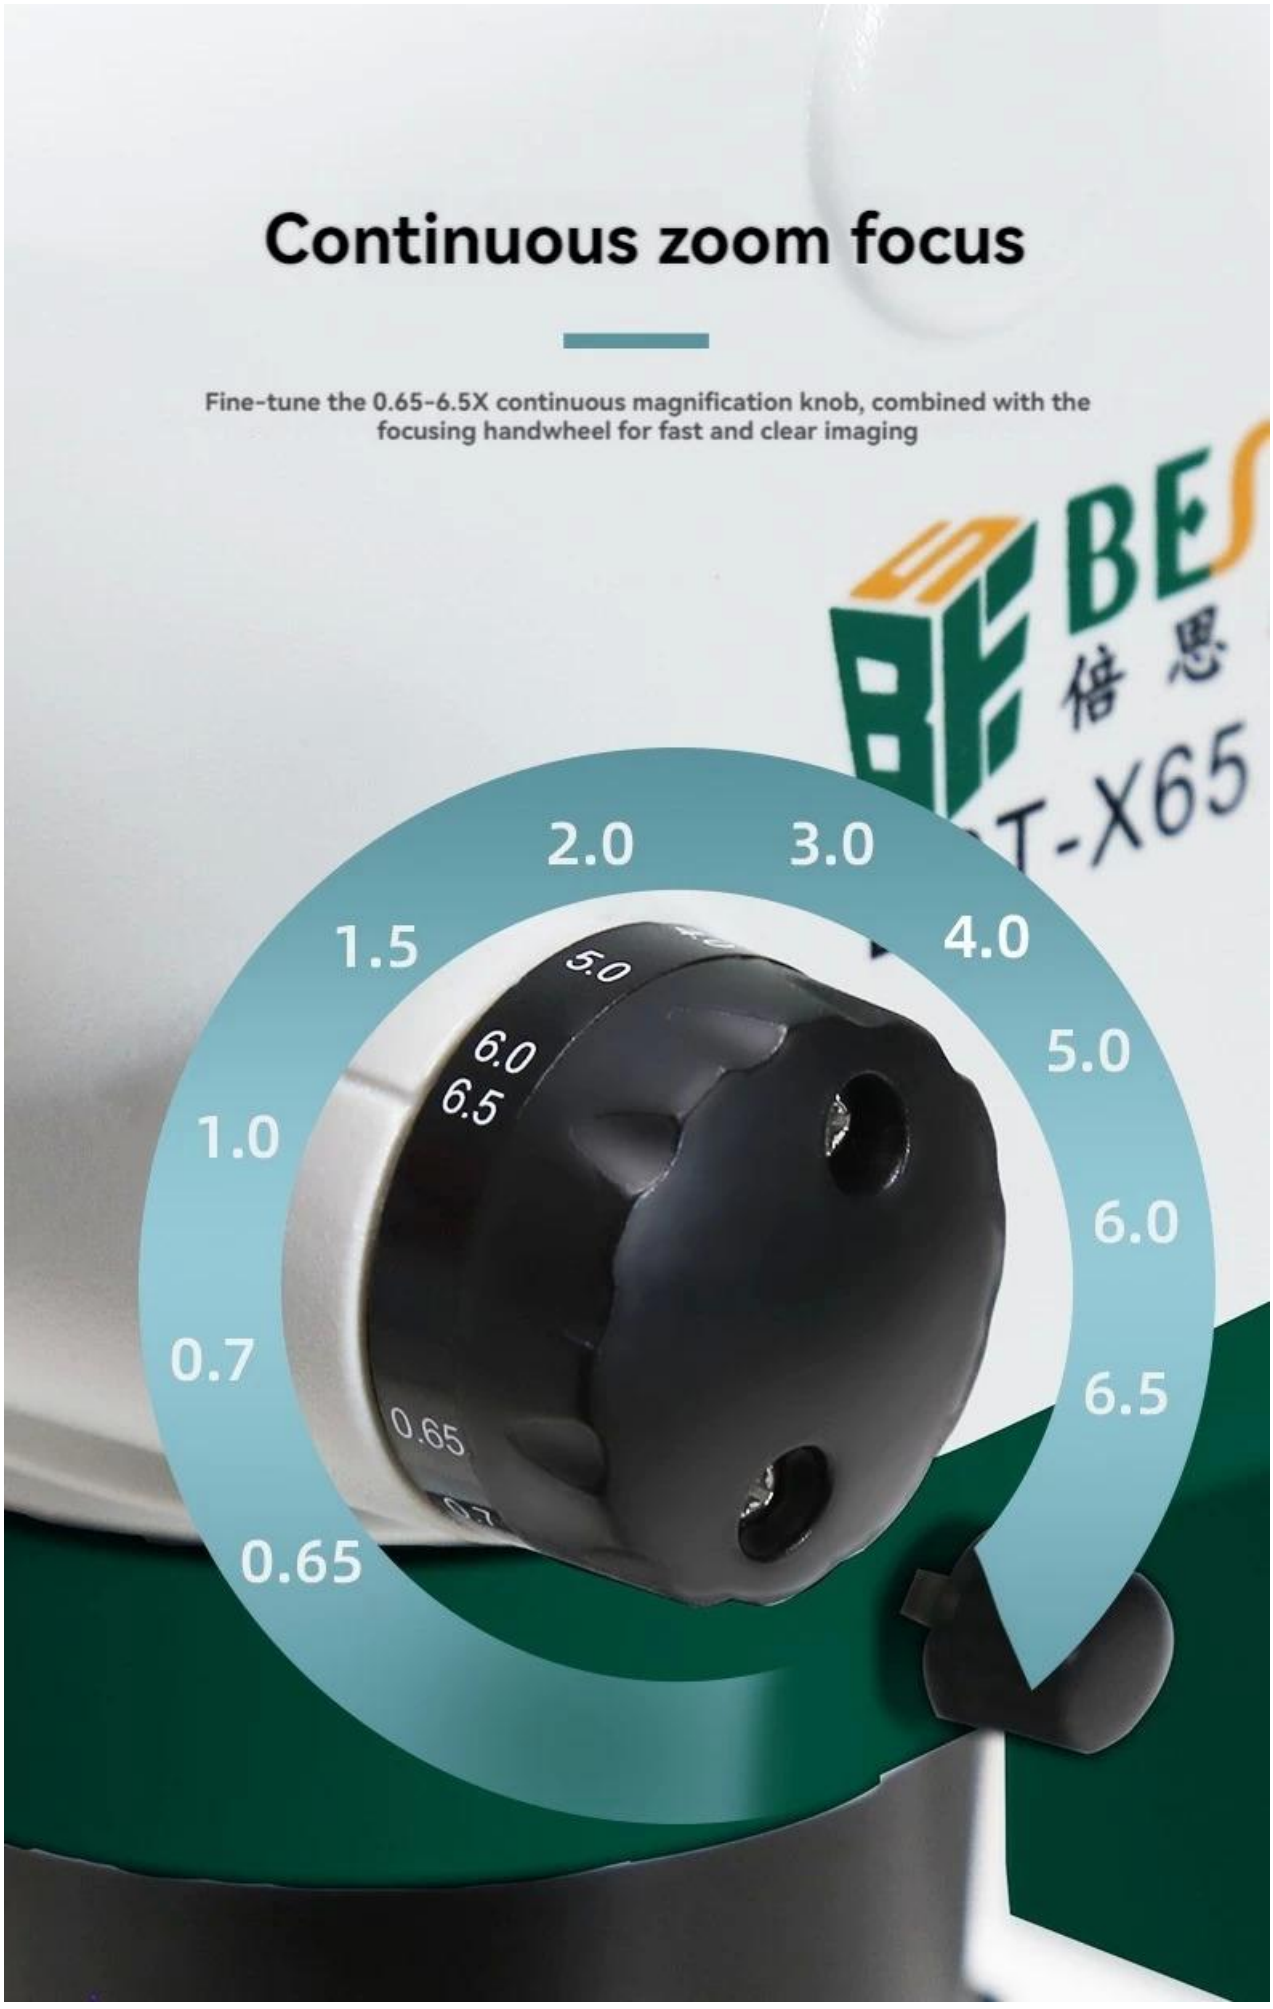

Naked eye 3D experience

The optical axis of the two mirrors constitutes the Angle of view equivalent to the binocular observation of the human eye. In this way, the stereovision image of three-dimensional space is formed

Wide range of application

Suitable for PCB repair, CPU repair, wiring repair, etc

Mobile phone repair
PHONE REPAIR

Line repair
SMT PATCHES

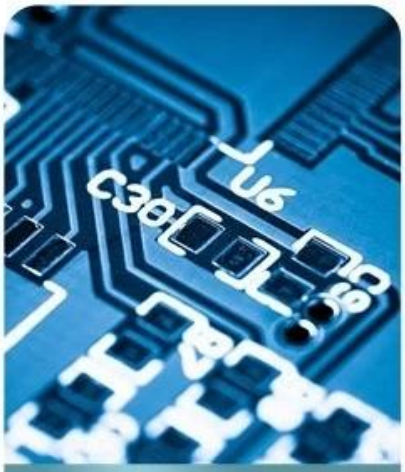

Line link
BGA PLANTING TIN

Watch restoration
WATCH REPAIR

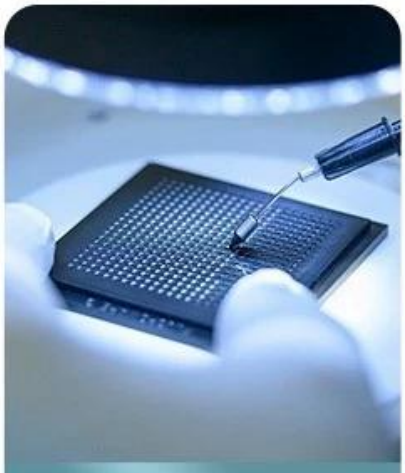

CPU complement
WELDING WORK

PCB maintenance
CAPACITANCE RESISTANCE

High point wide-angle eyepiece. Ultra HD wide field of view

45°	32.2 mm	±5D	55-75
Bevel the head	Field of view	Dioptric regulation	Pupil distance is adjustable

Equipped with high light transmittance glass, magnifying image strong three-dimensional sense, high resolution, image surface. Flat, both eyes support diopter and pupil distance adjustment, ergonomic design. Meter, observation is not easy to fatigue.

Multilayer coated objective

The optical lenses are plated with a special film layer, revealing the effect of anti-reflection and so on, and the imaging is stable and clear.
Metal copper stepless adjustment, can adapt to long distance work

continuous zoom

Mildew proof durable

multilayer Coating film

copper Principal material

LED adjustable light | adjustable

The light in the dark is more balanced and the brightness is adjustable. Make the object clearer to observe and more suitable for work

Product parameter

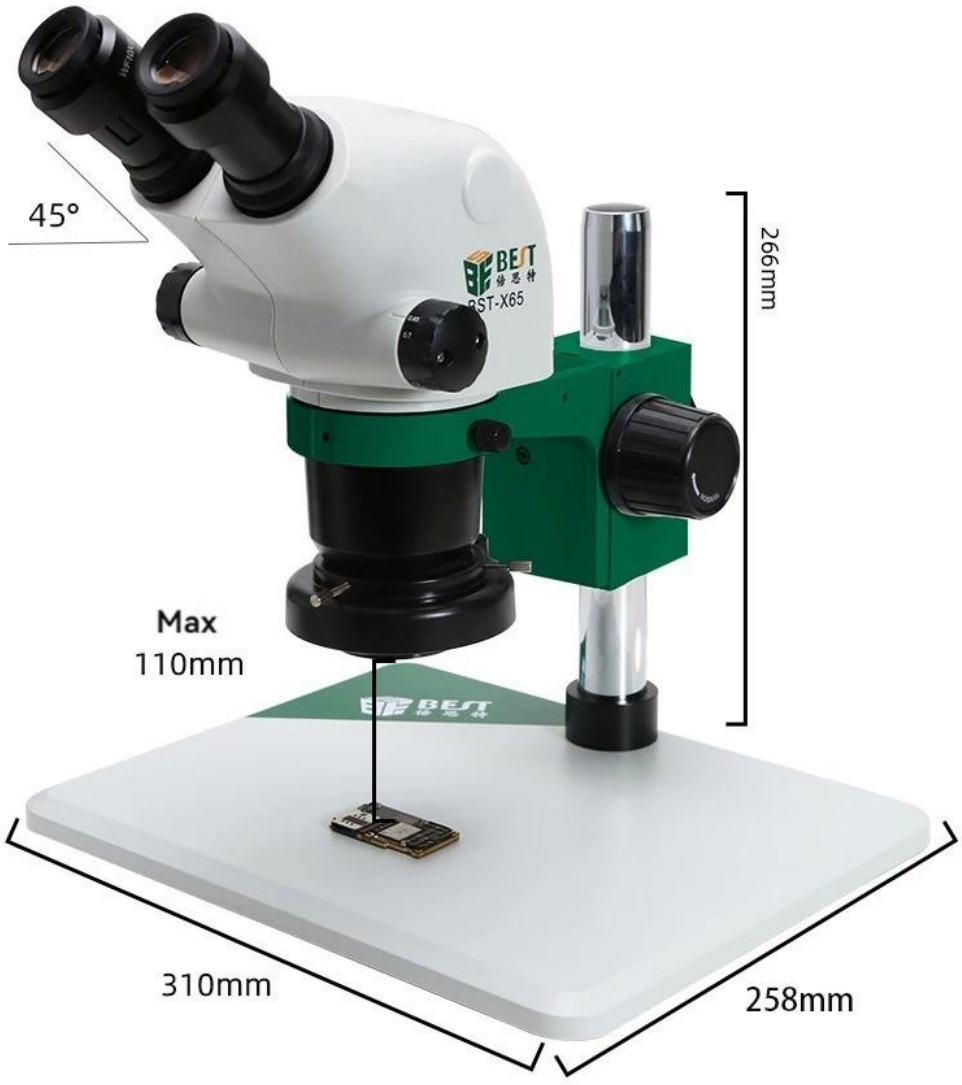

Field of view Radius	6.5X	7.0X	10X	20X	30X	40X	50X	60X	65X
Blow up magnification	32.2	31.1	21.4	10.6	7.1	5.4	4.3	3.6	3.4

eyepiece	Working distance	Trimmer mirror	Interpupillary distance	Eyepiece Angle	Net weight	Gross weight	Working area
10x/24	110mm	0.5X	50-75	45°	4.33kg	5.09kg	310*258mm

Package size	385*330*225mm	Eyepiece specification	Binocular style