1.Il filo di saldatura adotta il 60% di stagno 40% di piombo, 0,3-1,0 mm è disponibili; buona bagnatura, buona saldabilità
2. Poco impurità, capacità di diffusione e
3. prodotti rispettosi, non inquinare l'ambiente.
4. Il fumo è piccola, meno spruzzi
5. Utilizzare per il circuito ad alta intensità stampati

Saldatura in TV, radio o normali elettrodomestici
Riparazione di elettrodomestici normali e servizi audio
Saldatura a transponder radio, strumento e calcolatrice e così via

Description

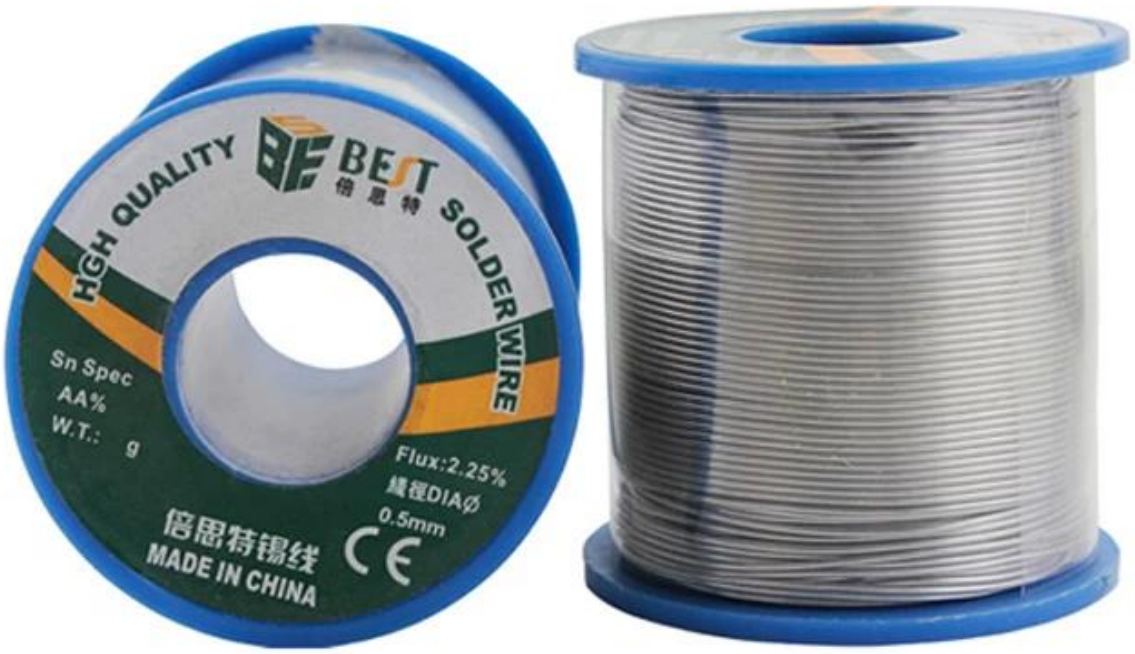

Name:	Soldering wire	Brand:	BEST
Ingredient:	60% Tin, 40% lead	Weight:	500g
Melting:	183-190（℃）	Temperature:	280-320（℃）
Specification:	Φ0.5mm、0.6mm、0.8mm、1.0mm		
Features1:	Good wetting, good solderability.		
Features2:	Fewer impurities, the proliferation of good adhesion		
Features3:	Less smoke, less spatter, environmentally friendly products		
Features4:	Increase production speed.Reduce production costs		
Features5:	To welding-intensive printed circuit board.		

Size

HIGH QUALITY
BEST
SOLDER WIRE
55mm
Flux:2.25%
0.5mm
Sn Spec
AA%
W.T.: g
倍思特锡线
MADE IN CHINA
55mm