

Nome: stoppino per saldatura di stoccaggio

Modello: VB-1515B, 2015B, 2515B

Larghezza: 1,5 mm, 2,0 mm, 2,5 mm

Lunghezza: 1,5 M

Caratteristica:

- ESD via cavo
- Filo Flessibile
- Filo di Rame Puro
- Scanalatura guidafile
- Posizioni di filo bloccato
- Materiali di alta qualità
- Tutela dell'ambiente
- Conducibilità termica veloce
- 2 Box Piccolo Spazio Di Archiviazione

# VBEST

## Storage type

Strong cleaning tin absorption line

### STORAGE TYPE TIN ABSORBING TAPE

- Low residue
- Tin fast
- With storage



# Small objects multi-purpose

Can accommodate all kinds of small screw parts

---

The countertop is clean and tidy,  
and the parts are not lost.





# Pure copper precision geometry

## Shape woven


---

Greatly reduce the damage to the circuit board, heat conduction on the tin fast performance is good

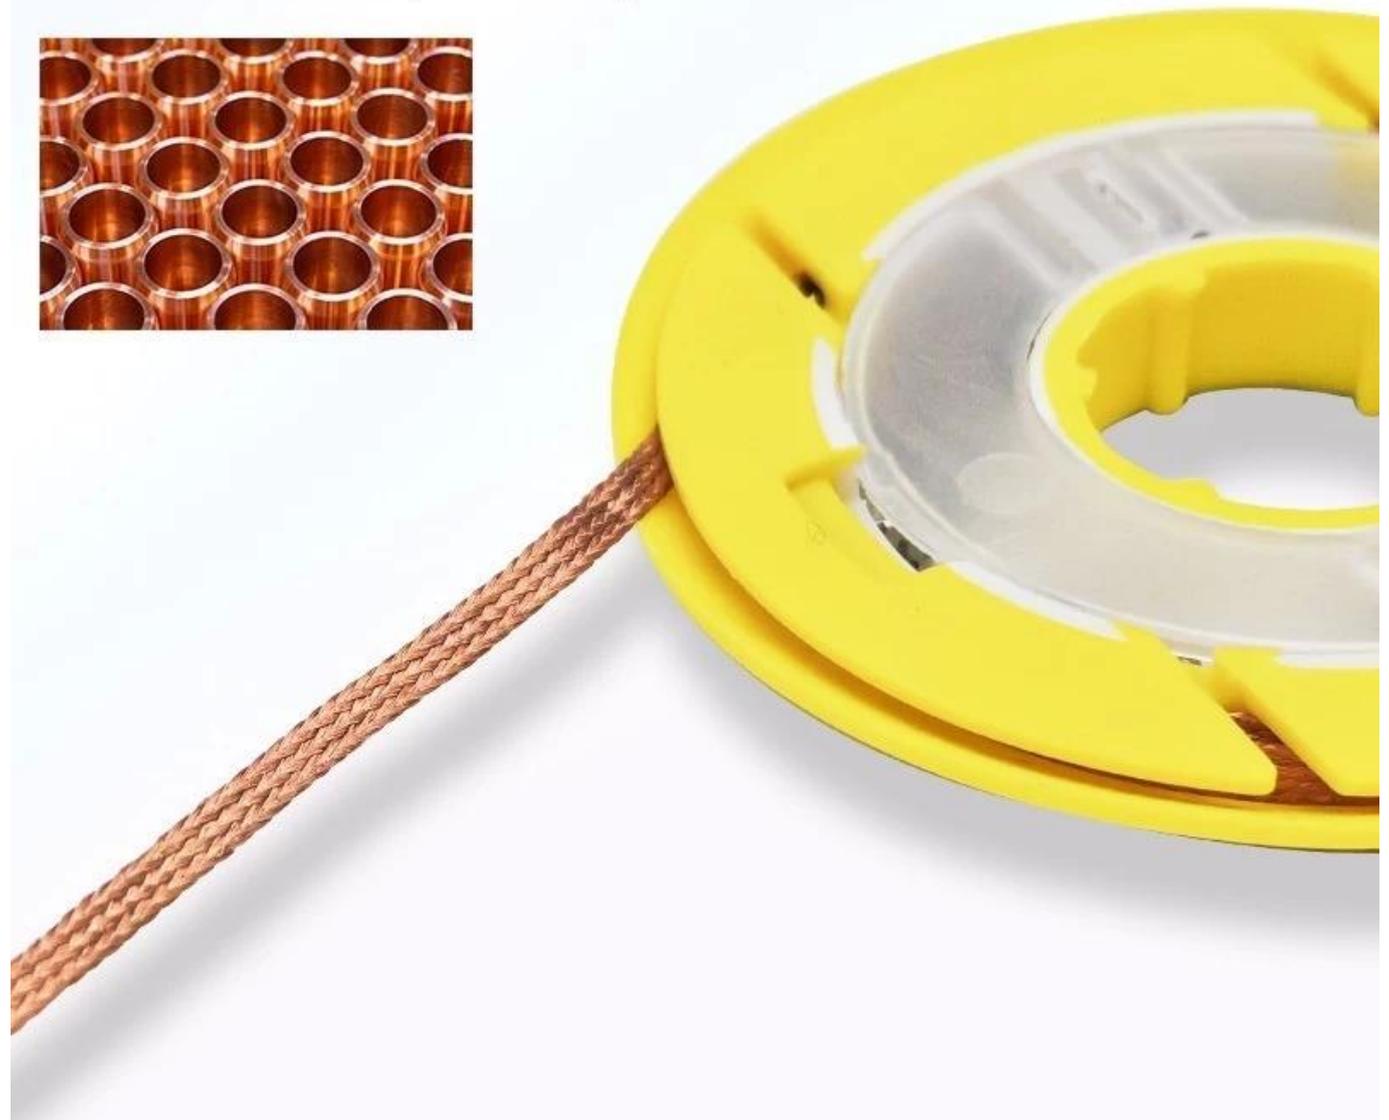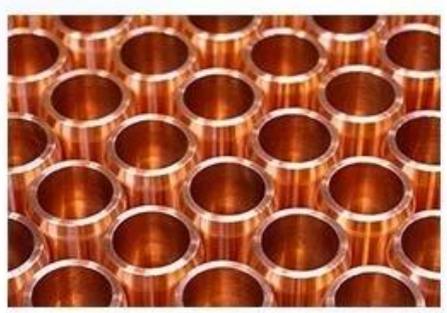

# Low consumption and good absorption

New copper weave design, soft tin absorption tape, no second-hand copper, good absorption, use a small amount of tin absorption tape to remove more solder

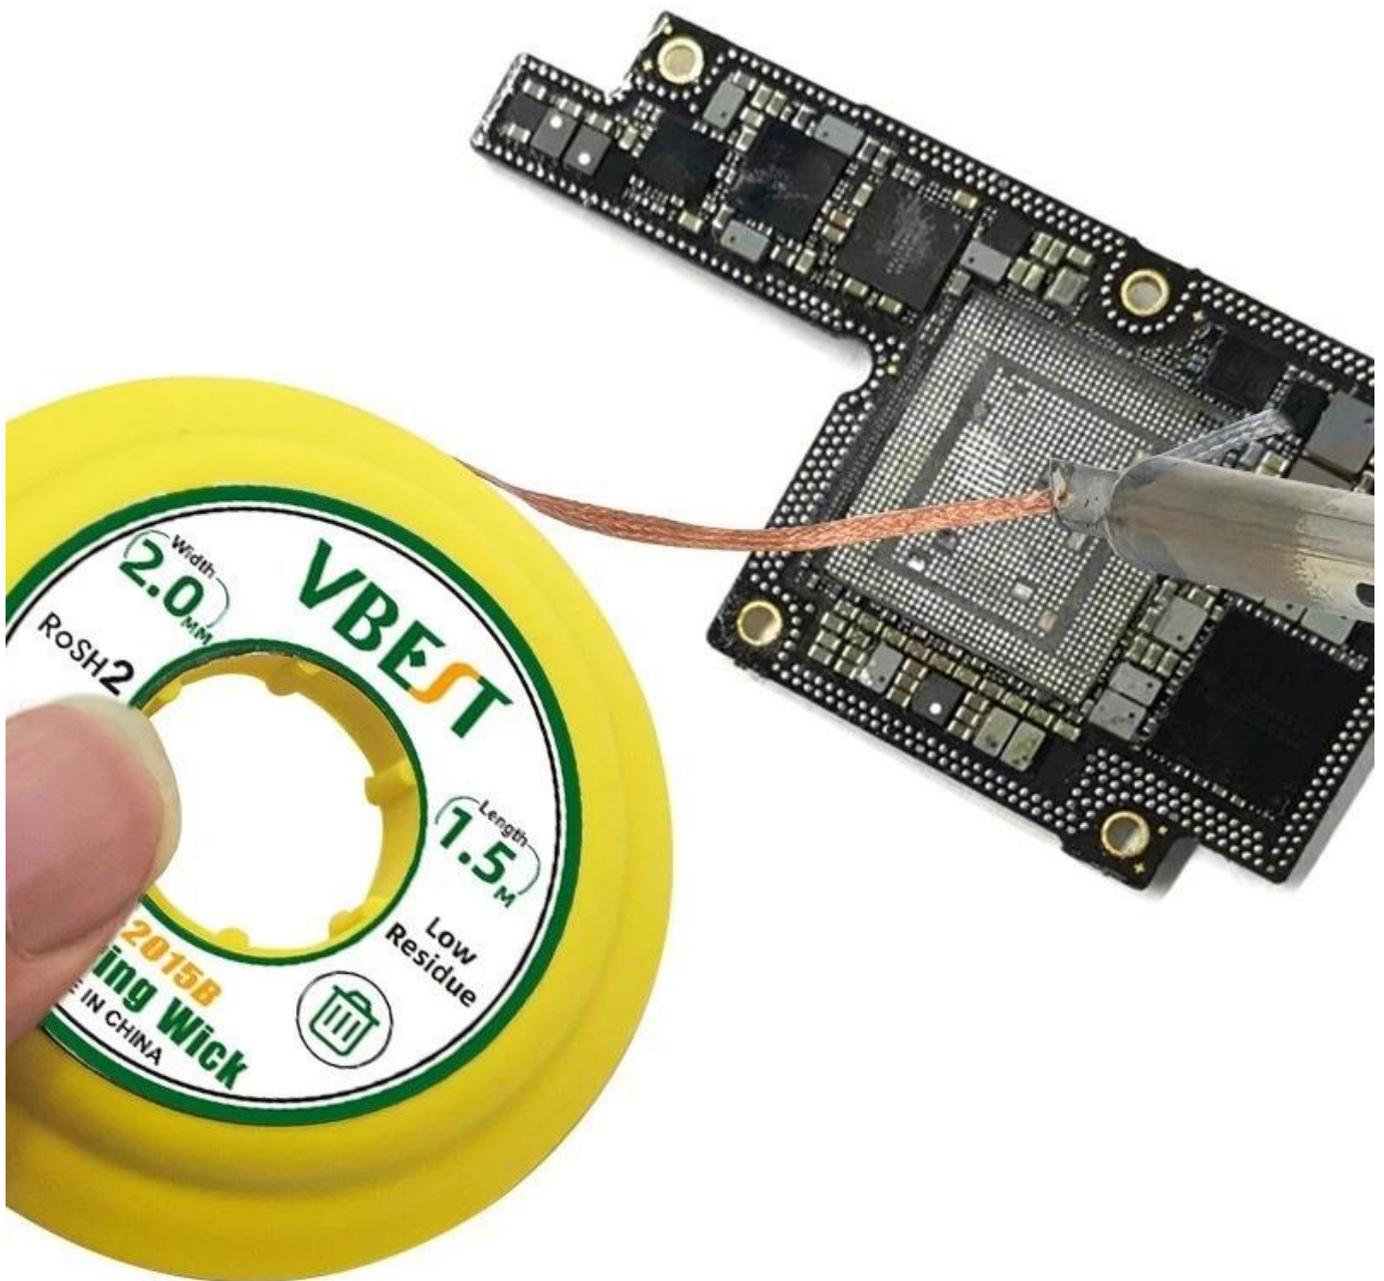

# Product Parameters



Name	Model No.
Storage type solder wick	VB-1515B, 2015B, 2515B
Line warp Diameter	Length
1.5,2.0,2.5mm	1.5M
Weight G.W.	Size
13g	57*10mm

## Multiple specifications

Applicable to all kinds of different suction tin scene

---



# Strong cleaning low residue

The tin absorption belt contains Rosin, smooth tin dragging, good absorption and protection of components



Mobile phone Motherboard: absorb excess welding when removing tin

Tin, oxidation and corrosion resistance, thermal conductivity on tin

Can be good, tin absorption clean, in desoldering, core

After the chip is removed, there will be a large number of circuit boards.

The solder, which affects the soldering of the chip,

Usually clean with suction tin belt.

# Product Parameters



Name	Model No.
Storage type solder wick	VB-1515B, 2015B, 2515B
Line warp Diameter	Length
1.5,2.0,2.5mm	1.5M
Weight G.W.	Size
13g	57*10mm