

1.熱風はんだ付けステーションは、センサーに近いループ、マイコン制御温度、LED表示を採用しています。

2.ハイパワー、急速加熱、正確かつ安定した温度。

3.空気の流れが調節可能で、風が重いが、ソフトである。

4.システムは、ハンドルを保持することによって、すぐに作業を開始します。フレームにハンドルを入れて、システムがリアルタイム動作のために待機state.Convenient省エネに変わります。

5.Intelligent冷却システム。温度が下100℃である場合には、発熱体の寿命を延長し、ホットエアガンを保護することができ、省エネ状態に変わる。

6.長作動寿命と低ノイズの少ないplace.Brushlessブロワーを占める、それは耐久性とハンサムだ、小さな地殻のデザインを採用。

7.はんだごての熱が急速に、かつ鉛フリーはんだ付けに適している、すぐに戻って温度にすることができます。

アプリケーション:

1熱風はんだ付けステーション2は、一般PCB、IC SMT、SMDリワークのために使用される。電子用はんだ

Specification

ホットエアガンパーツ	
動作電圧:	AV110V / 220V 50Hz / 60Hzの
出力電力:	700ワット
温度範囲:	100°C~450°C
ガス種:	エアータイプブラシレスブロワ
気体流:	120L /分（マックス）
ノズルの仕様:	5ミリメートル8ミリメートル10ミリメートルの直径
電熱線:	ハイパワー電熱線
S年上の 機器	
動作電圧:	AC 26Vは、10%の50Hzのを±
出力電力:	60W
パワー	200℃~480℃で
先端:	BST900 - M-T-I
ヒーター:	セラミックヒーターエレメント

Description

Model:	BST-898D	Weight:	2.64kg
Name:	Combo free hot air gun + soldering station		
Features1	high-power,rapid heating,accurate and stable temperature		
Features2	The airflow is adjustable,the wind is heavy but soft		
Features3	Adopt sensor close loop,microcomputer control the temp -erature,LED display		
Features4	The solder iron heat rapidly, and can be back to tempera -ture quickly,which is good for lead-free soldering		

Description

Details

Temperature display of heat gun

Temperature display of solder iron



Up button/Down button
Changing-over button

Air volume regulator

Stainless steel nozzle
10mm,8mm,5mm, three different size

Air outlet
Screw diameter, the better the protection element

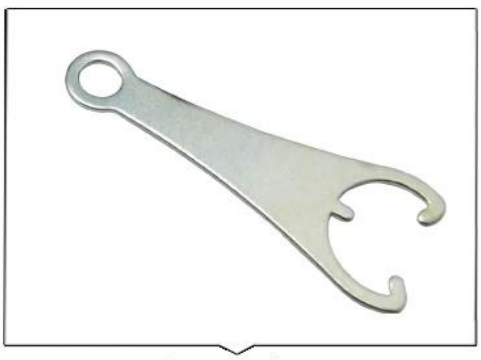

Open helper

IC extraction tool