BACKLIGHT

— DIGITAL MULTIMETER —

Product Usage

BASIC SKILLS	RANGE	BASIC ACCURACY
DC VOLTAGE	220mA/2V/20V/200V/500V	± (0.5%+4)
AC VOLTAGE	200V/500V	± (0.8%+10)
DC CURRENT	2mA/20mA/200mA/10A	± (0.8%+3)
RESISTANCE	200Ω/2KΩ/20KΩ/2200kΩ/2MΩ	± (0.8%+5)

SPECIAL FUNCTION	BST-VC830L
DIODE, TRIODE TEST	✓
ON-OFF ALARM	✓
LOW VOLTAGE DISPLAY	✓
FUNCTIONAL PROTECTION	✓
200MA GEAR INSURANCE	✓
10A GEAR INSURANCE	✓
EARTHQUAKE PROTECTION	✓
INPUT RESISTANCE	10MΩ
OPERATION METHOD	Manual range
MAXIMUM DISPLAY	1999
LCD DISPLAY	40X32mm
POWER SUPPLY	9V(6F22)
BODY COLOR	white green combination
BODY WEIGHT	150g
DIMENSIONS	143x70x33.2mm
STANDARD ACCESSORIES	Test pen, battery, English manual
STANDARD INNER PACKAGING	Color box
STANDARD PACKAGE QUANTITY	100 units
PACKAGE SIZE	158x108x50mm
CARTON SIZE	600*450*405mm
CARTON GROSS WEIGHT	24.7kg

PRODUCT INFORMATION

EASY TO READ DATA

BACKLIGHT DISPLAY

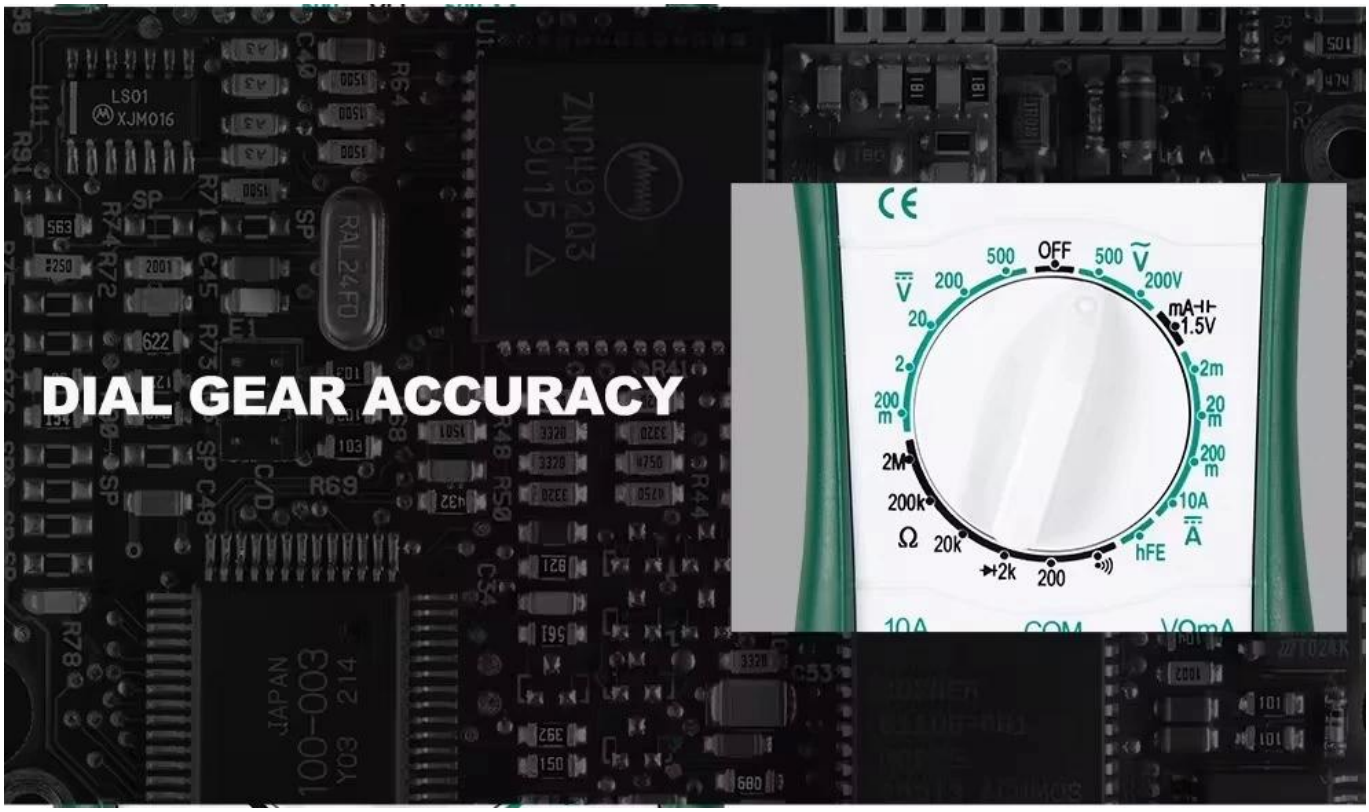

WIPE LINE JACK

EASY TO INSERT

JACK FASTENING

LCD display

Power switch

Transistor test

Backlight switch

Range knob

10A jack

Voltage resistance mA gear

Common side, negative input

VC830L
9.58
HOLD
9v battery test

HOLD
Resistance test

Diode,Triode test

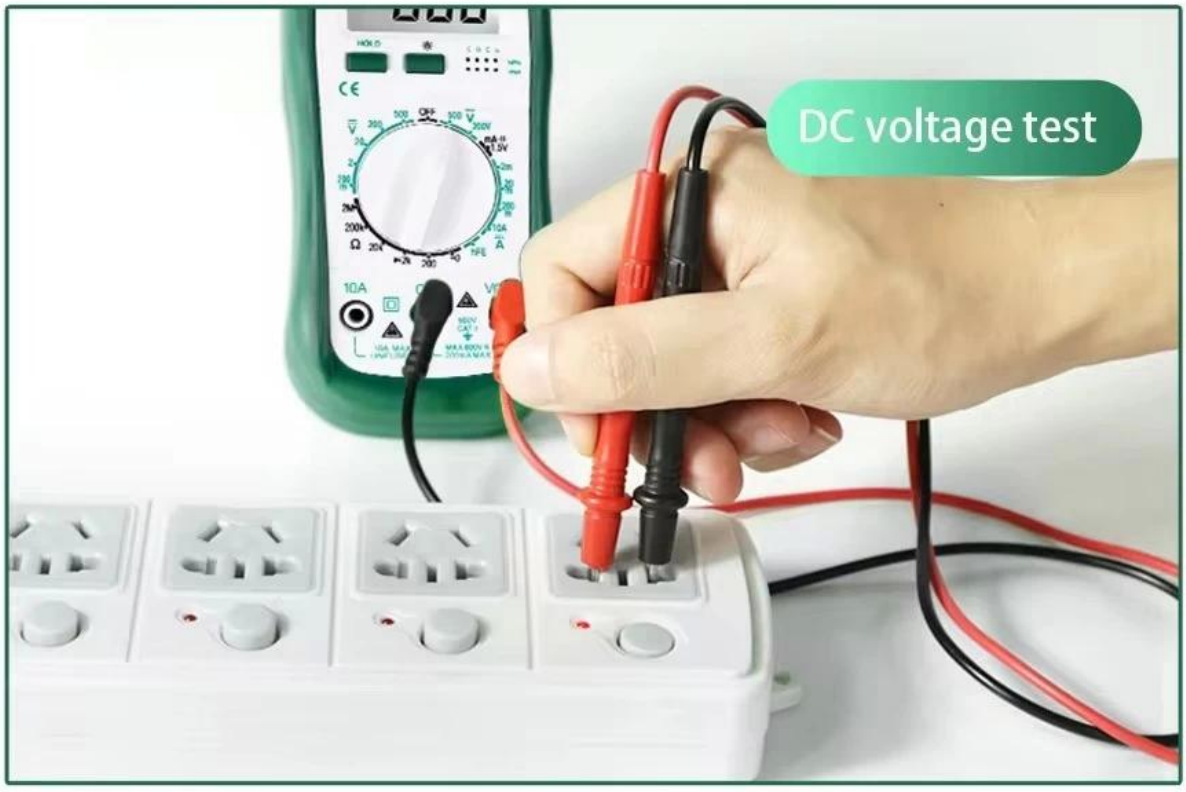
DC voltage test

PRODUCT SIZE

PRODUCT SIZE