

Features

1. DC

-
-
-
- LED

2. DC DC

3. DC

Application

DC ECT

Specification

	10 50Hz ±220V
	0 15V
	1A
	15W
	2.5
	≤1mVRMS

	0 15V
	≤0.01 + 5mV
	≤0.01 + 2mV
	≤100US ≤3A
	0 1A
	≤0.2 + 5
	≤0.2 + 10

	1.3kg
	17.4 * 9 * 15 CM
	76 * 28.5 * 46
	20
	28
	M

Features



Product Name: DC power supply

Product Type: BST-1501A

Body weight: 1.3kg

Dimensions: 106*141*150mm

Widely used in factory production lines, schools, maintenance, commissioning, laboratories and other places

Features introduced

- 1.Voltage :0-15V Current 0-1A;
- 2.Total power foot, high stability and reliable quality;
- 3.With short circuit protection, automatic recovery function;

Size





Picture


Positive



Side



Back

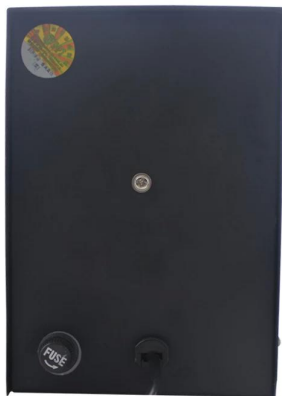


Package





Voltage display

Voltage display accuracy: 2 small cell

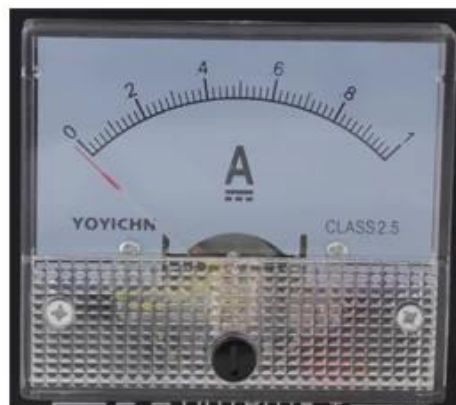

Current Display

Current display accuracy: 2 small cell



0-15V output



Power key

After power on, press the switch is turned on to work, close to stop working



Voltage output / input mode conversion



Fused

Equipped with a fuse on the rear panel, the effective protection of the instrument, use more confidence